



United States Department of the Interior

U.S. GEOLOGICAL SURVEY
Reston, Virginia 22092

REPORT OF CALIBRATION of Aerial Mapping Camera

July 31, 1995

Camera type:	Wild RC20*	Camera serial no.:	5132
Lens type:	Wild Universal Aviogon A4-F	Lens serial no.:	13162
Nominal focal length:	153 mm	Maximum aperture:	f/4
		Test aperture:	f/4

Submitted by: Photo Science, Inc.
Gaithersburg, Maryland

Reference: Photo Science, Inc., purchase order
No. 95-0433, dated July 27, 1995.

These measurements were made on Kodak Micro-flat glass plates, 0.25 inch thick, with spectroscopic emulsion type 157-01 Panchromatic, developed in D-19 at 68° F for 3 minutes with continuous agitation. These photographic plates were exposed on a multicollimator camera calibrator using a white light source rated at approximately 5200K.

I. Calibrated Focal Length: 153.474 mm

II. Lens Distortion

Field angle:	7.5°	15°	22.7°	30°	35°	40°
Symmetric radial (um)	-1	-2	-2	0	1	2
Decentering (um)	0	0	0	1	1	1

Symmetric radial
distortion parameters

$K_0 = 0.5901 \times 10^{-4}$
 $K_1 = -0.9239 \times 10^{-8}$
 $K_2 = 0.2880 \times 10^{-12}$
 $K_3 = 0.0000$
 $K_4 = 0.0000$

Decentering
distortion parameters

$P_1 = -0.6336 \times 10^{-7}$
 $P_2 = 0.4544 \times 10^{-7}$
 $P_3 = 0.0000$
 $P_4 = 0.0000$

Calibrated
principal point

$x_p = 0.003$ mm
 $y_p = 0.002$ mm

The values and parameters for Calibrated Focal Length (CFL), Symmetric Radial Distortion (K_0, K_1, K_2, K_3, K_4), Decentering Distortion (P_1, P_2, P_3, P_4), and Calibrated Principal Point [point of symmetry] (x_p, y_p) were determined through a least-squares Simultaneous Multiframe Analytical Calibration (SMAC) adjustment. The x and y-coordinate measurements utilized in the adjustment of the above parameters have a standard deviation (σ) of ± 3 microns.

* Equipped with Forward Motion Compensation

III. Resolving Power in cycles/mm

Area-weighted average resolution: 85

Field angle:	0°	7.5°	15°	22.7°	30°	35°	40°
Radial Lines	113	134	80	67	95	95	80
Tangential lines	113	113	95	80	80	80	80

The resolving power is obtained by photographing a series of test bars and examining the resultant image with appropriate magnification to find the spatial frequency of the finest pattern in which the bars can be counted with reasonable confidence. The series of patterns has spatial frequencies from 5 to 268 cycles/mm in a geometric series having a ratio of the 4th root of 2. Radial lines are parallel to a radius from the center of the field, and tangential lines are perpendicular to a radius.

IV. Filter Parallelism

The two surfaces of the Wild 420 No. 7286 and the 525 No. 7186 filters accompanying this camera are within 10 seconds of being parallel. The 525 filter was used for the calibration.

V. Shutter Calibration

<u>Indicated exposure time</u>	<u>Effective exposure time</u>	<u>Efficiency</u>
1/125	8.99 ms = 1/110 s	80%
1/250	5.00 ms = 1/200 s	80%
1/500	2.50 ms = 1/400 s	80%
1/1000	1.05 ms = 1/950 s	80%


The effective exposure times were determined with the lens at aperture f/4. The method is considered accurate within 3 percent. The technique used is Method I described in American National Standard PH3.48-1972(R1978).

VI. Film Platen

The film platen mounted in Wild RC20 drive unit No. 5132-529 does not depart from a true plane by more than 13 um (0.0005 in).

This camera is equipped with a platen identification marker that will register "529" in the data strip area for each exposure.

VII. Principal Points and Fiducial Coordinates

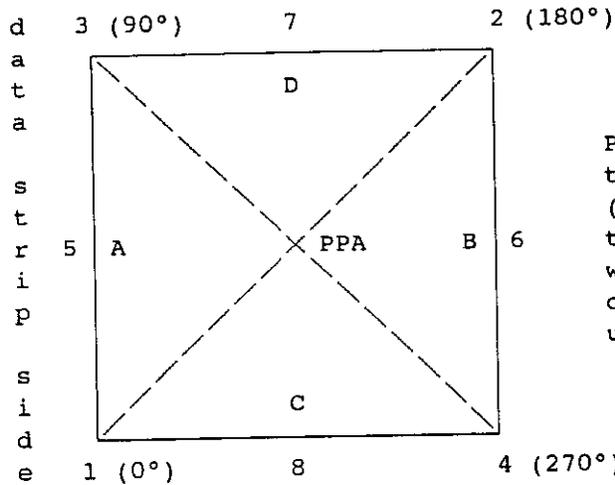

Positions of all points are referenced to the principal point of autocollimation (PPA) as origin. The diagram indicates the orientation of the reference points when the camera is viewed from the back, or a contact positive with the emulsion up. The data strip is to the left.

	<u>X coordinate</u>	<u>Y coordinate</u>
Indicated principal point, corner fiducials	-0.005 mm	-0.005 mm
Indicated principal point, midside fiducials	-0.003	-0.005
Principal point of autocollimation	0.0	0.0
Calibrated principal point (point of symmetry)	-0.001	0.004

Fiducial Marks

1	-106.006 mm	-106.006 mm
2	105.993	105.994
3	-106.005	105.993
4	105.999	-106.006
5	-110.007	-0.006
6	109.996	-0.003
7	-0.005	109.993
8	0.000	-110.006

VIII. Distances Between Fiducial Marks

Corner fiducials (diagonals)

1-2: 299.813 mm 3-4: 299.816 mm

Lines joining these markers intersect at an angle of 90° 00' 02"

Midside fiducials

5-6: 220.003 mm 7-8: 220.000 mm

Lines joining these markers intersect at an angle of 90° 00' 03"

Corner fiducials (perimeter)


1-3: 211.999 mm 2-3: 211.998 mm
1-4: 212.005 mm 2-4: 212.001 mm

The method of measuring these distances is considered accurate within 0.005 mm

IX. Stereomodel Flatness

Drive unit No.: 5132-529
 Platen ID: 529

Base/Height ratio: 0.6
 Maximum angle of field tested: 40°

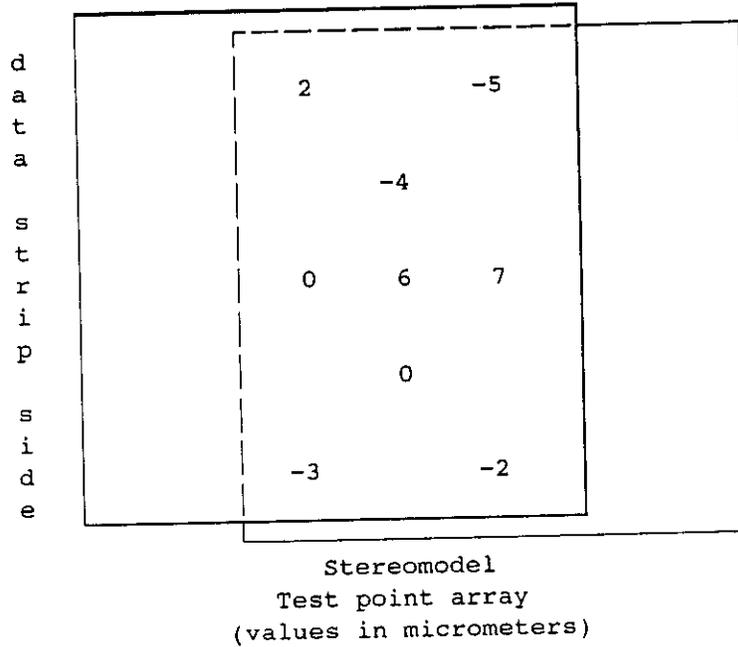

The values shown on the diagram are the average departures from flatness (at negative scale) for two computer-simulated stereomodels based on comparator measurements on contact glass (Kodak Micro-flat) diapositives made from Kodak 2405 film exposures. These measurements are considered accurate within 5 um.

X. Lens/Film Resolving Power in cycles/mm

Area-weighted average resolution: 44	Film: Type 2405						
Field angle:	0°	7.5°	15°	22.7°	30°	35°	40°
Radial Lines	57	57	48	40	48	48	40
Tangential lines	57	57	48	40	40	40	40

LENS/FILM DISTORTION PARAMETERS

Magazine No.: 5132-529

Base/Height ratio: 0.6

Platen ID: 529

Maximum angle of field tested: 40°

XI. Calibrated Focal Length: 153.484 mmXII. Lens/Film Distortion

Field angle:	7.5°	15°	22.7°	30°	35°	40°
Symmetric radial (um)	2	3	3	2	0	-3
Decentering (um)	0	0	0	1	1	1

Symmetric radial distortion parameters

$$\begin{aligned} K_0 &= -0.8353 \times 10^{-4} \\ K_1 &= 0.1001 \times 10^{-7} \\ K_2 &= -0.2195 \times 10^{-12} \\ K_3 &= 0.0000 \\ K_4 &= 0.0000 \end{aligned}$$

Decentering distortion parameters

$$\begin{aligned} P_1 &= 0.4412 \times 10^{-7} \\ P_2 &= -0.5039 \times 10^{-7} \\ P_3 &= 0.0000 \\ P_4 &= 0.0000 \end{aligned}$$

Calibrated principal point

$$\begin{aligned} x_p &= -0.014 \text{ mm} \\ y_p &= -0.005 \text{ mm} \end{aligned}$$

The above measurements were computed from contact glass positives made from Kodak 2405 film exposed in the magazine.

The values and parameters for Calibrated Focal Length (CFL), Symmetric Radial Distortion (K_0, K_1, K_2, K_3, K_4), Decentering Distortion (P_1, P_2, P_3, P_4), and Calibrated Principal Point [point of symmetry] (x_p, y_p) were determined through a least-squares Simultaneous Multiframe Analytical Calibration (SMAC) adjustment. The x and y-coordinate measurements utilized in the adjustment of the above parameters have a standard deviation (σ) of ± 3 microns.

This aerial mapping camera calibration report supersedes the previously issued USGS Report No. OSL/1904, dated August 27, 1993.

FOA

Frank C. MacCue

Bradish F. Johnson
Chief, Optical Science Laboratory
National Mapping Division



United States Department of the Interior

U.S. GEOLOGICAL SURVEY
Reston, Virginia 22092

REPORT OF CALIBRATION of Aerial Mapping Camera

July 31, 1995

Camera type:	Wild RC20*	Camera serial no.:	5132
Lens type:	Wild Universal Aviogon A4-F	Lens serial no.:	13162
Nominal focal length:	153 mm	Maximum aperture:	f/4
		Test aperture:	f/4

Submitted by: Photo Science, Inc.
Gaithersburg, Maryland

Reference: Photo Science, Inc., purchase order
No. 95-0433, dated July 27, 1995.

These measurements were made on Kodak Micro-flat glass plates, 0.25 inch thick, with spectroscopic emulsion type 157-01 Panchromatic, developed in D-19 at 68° F for 3 minutes with continuous agitation. These photographic plates were exposed on a multicollimator camera calibrator using a white light source rated at approximately 5200K.

I. Calibrated Focal Length: 153.475 mm

This measurement is considered accurate within 0.005 mm


II. Radial Distortion

Field angle	\bar{D}_c	D_c for azimuth angle			
		0° A-C	90° A-D	180° B-D	270° B-C
degrees	um	um	um	um	um
7.5	0	1	2	-1	-1
15	-2	-2	-1	-1	-2
22.7	-3	-4	-1	-4	-3
30	-1	-1	-1	-1	1
35	2	2	1	1	2
40	1	0	3	0	2

The radial distortion is measured for each of four radii of the focal plane separated by 90° in azimuth. To minimize plotting error due to distortion, a full least-squares solution is used to determine the calibrated focal length. \bar{D}_c is the average distortion for a given field angle. Values of distortion D_c based on the calibrated focal length referred to the calibrated principal point (point of symmetry) are listed for azimuths 0°, 90°, 180° and 270°. The radial distortion is given in micrometers and indicates the radial displacement away from the center of the field. These measurements are considered accurate within 5 um.

* Equipped with Forward Motion Compensation

VII. Principal Points and Fiducial Coordinates

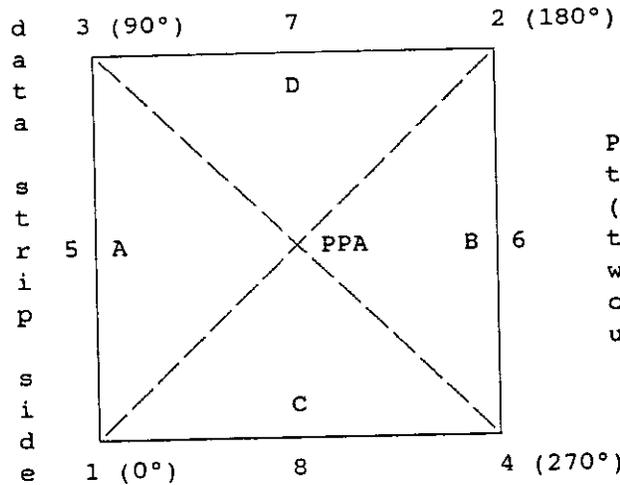

Positions of all points are referenced to the principal point of autocollimation (PPA) as origin. The diagram indicates the orientation of the reference points when the camera is viewed from the back, or a contact positive with the emulsion up. The data strip is to the left.

	<u>X coordinate</u>	<u>Y coordinate</u>
Indicated principal point, corner fiducials	-0.005 mm	-0.005 mm
Indicated principal point, midside fiducials	-0.003	-0.005
Principal point of autocollimation (PPA)	0.0	0.0
Calibrated principal point (pt. of sym.) x_p, y_p	0.003	0.002

Fiducial Marks

1	-106.006 mm	-106.006 mm
2	105.993	105.994
3	-106.005	105.993
4	105.999	-106.006
5	-110.007	-0.006
6	109.996	-0.003
7	-0.005	109.993
8	0.000	-110.006

VIII. Distances Between Fiducial Marks

Corner fiducials (diagonals)

1-2: 299.813 mm 3-4: 299.816 mm

Lines joining these markers intersect at an angle of 90° 00' 02"

Midside fiducials

5-6: 220.003 mm 7-8: 220.000 mm

Lines joining these markers intersect at an angle of 90° 00' 03"

Corner fiducials (perimeter)

1-3: 211.999 mm 2-3: 211.998 mm

1-4: 212.005 mm 2-4: 212.001 mm

The method of measuring these distances is considered accurate within 0.003 mm

FILM RADIAL DISTORTION, STEREOMODEL FLATNESS AND RESOLVING POWER

Drive unit No.: 5132-529
Platen ID: 529

Base/Height ratio: 0.6
Maximum angle of field tested: 40°

Calibrated Focal Length

flash plate: 153.475 mm
film: 153.485 mm


IX. Radial Distortion

Field angle	\bar{D}_c	D_c for azimuth angle			
		0° A-C	90° A-D	180° B-D	270° B-C
degrees	um	um	um	um	um
7.5	4	2	3	4	5
15	3	2	4	4	4
22.5	1	2	0	0	1
30	1	2	3	-3	3
35	1	-2	2	1	2
40	-4	-6	-2	-5	-2

X. Stereomodel Flatness

The values shown on the diagram are the average departures from flatness (at negative scale) for two computer-simulated stereomodels based on comparator measurements on contact glass (Kodak micro flat) diapositives made from Kodak 2405 film exposures. These measurements are considered accurate within 5 um.

d
a
t
a
s
i
d
s
e
t
r
i
p

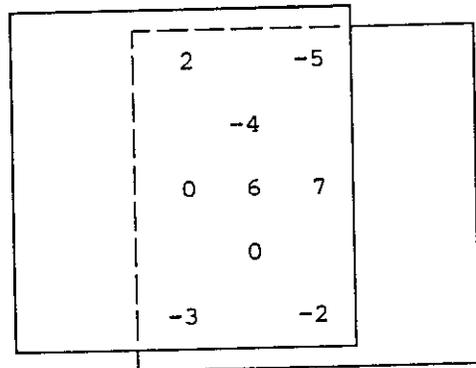

Stereomodel test point array
(values in micrometers)

XI. Lens/Film Resolving Power in cycles/mm

Area-weighted average resolution: 44	Film: Type 2405						
Field angle:	0°	7.5°	15°	22.7°	30°	35°	40°
Radial Lines	57	57	48	40	48	48	40
Tangential lines	57	57	48	40	40	40	40

This aerial mapping camera calibration report supersedes the previously issued USGS Report No. OSL/1904, dated August 27, 1993.

Frank C. Max Cui
for Bradish F. Johnson
Chief, Optical Science Laboratory
National Mapping Division