



WATER-RIGHT DOCKET

John D. Rockefeller Jr. Memorial Parkway

Docket No: 1

FLAGG RANCH WELL

Supporting Hydro Data

09-21-1978: letter to weber drilling from procurement agent and contracting officer regarding final inspection of the work under con

S7217

September 21, 1978

LETTER OF ACCEPTANCE

Weber Drilling
P.O. Box 252
Jackson, WY 83001

Dear Mr. Weber:

A final inspection of the work under your Contract CX1460 8 0023 for well drilling in Grand Teton National Park and the John D. Rockefeller, Jr. Memorial Parkway has revealed that the work was completed substantially in accordance with the plans and specifications and is accepted as of September 8, 1978, subject to the terms and conditions of the contract.

Sincerely yours,

Arthur M. Sponsel
Procurement Agent and
Contracting Officer

AMSponsel:hgw

cc: Finance, RMR

Form 10-194
(Rev. 9/60)UNITED STATES DEPARTMENT OF THE INTERIOR
NATIONAL PARK SERVICEGrand Teton National Park

(Park)

Check One:

Monthly
Estimate ☐Final
Estimate ☒

UNIT PRICE CONTRACT

ESTIMATE NO. 2 (Final)	FOR (Period) 6/6/78 - 8/18/78	DATE September 20, 1978
CONTRACT NO. CX 1460 8 0023	COMPLETION DATE August 4, 1978	EXTENDED DATE August 31, 1978
CONTRACTOR Weber Drilling, P.O. Box 252, Jackson, WY 83001		ORIGINAL CONTRACT \$ 11,284.00
PROJECT Well drilling		CHANGE ORDERS* \$ - 261.50
LOCATION J.D.R. Parkway and Grand Teton National Park		TOTAL CONTRACT \$ 11,022.50

ITEM NO.	CONTRACT QUANTITY	DESCRIPTION	QUANTITY TO DATE	UNIT PRICE	AMOUNT TO DATE
SCHEDULE II					
1.	200 Ft.	Drill, case, grout and develop well.	95 Ft.	27.00	2,565.00
2.	8 Ft.	8-inch well screen.	23 Ft.	130.00	2,990.00
3.	24 Hr.	Pump test well.	24 Hr.	23.00	552.00

RECOMMENDED (Project Supervisor) <i>Dickie Stanchey</i> APPROVED (Contracting Officer)	DATE 9/20/78	SUMMARY TOTAL TO DATE..... \$ 10,218.50 LESS RETAINED AMOUNT..... -0- NET..... 10,218.50 LESS PREVIOUS PAYMENTS..... 4,111.50 LESS LIQUIDATED DAMAGES..... -0- DUE THIS ESTIMATE..... 6,107.00 % COMPLETED TO DATE: 100%
--	------------------------	---

*Show Breakdown on Reverse

(See Reverse for Distribution)

Weber Drilling
Box 252
Jackson, Wyo.

Grand Teton National Park
Moose, Wyo.

Well log

John D. Rockefeller Memorial Parkway

Start 6-9-78

Formation

0- 2 top soil
2-36 sand, gravel
36-48 sand pea gravel , water
48-55 gravel brown clay
55-58 gravel, water
58-65 sand, water
65-70 fine sand, water
70-79 course sand, pea gravel, water
79-83 pea gravel, some sand, water
83-88 course sand, water
88-95 very fine sand, silt

Set UOP Johnson Stainless steel 8" telescop screen as follows
60--65 #50, 65-72 #10, 72-77 #80, 77-83 #125 slot size

Surged and developed for 16 Hr. to clean sand out

8 5/8 x .250 new steel casing +1 to ~~23~~ 60 Ft.

9-5-78 to 9-6-78 ran pump test as follows

Static water level at 6'9"

Pumped 5 Hr. at 100 G.P.M. drawdown to 28 Ft.
Pumped 15 Hr. at 165 G.P.M. drawdown to 48 Ft.
Pumped 4 Hr. at 135 G.P.M. drawdown to 55 Ft.

Should not be pumped over 165 G.P.M.

Completed 9-6-78

Weber Drilling
Box 252
Jackson, Wyo.

Grand Teton National Park
Moose, Wyo.

Well log

Jenny Lake Well

Start 6-7-78

Formation

0- 18 boulders to 2'
18- 30 gravel to 6"
30- 34 sand, gravel to 12", water
34- 55 sand, gravel to 8", silt
55- 61 gravel to 2", water
61-68 coarse sand, water
68- 82 gravel to 4", sand, water
82- 90 fine sand, some small gravel, water
90-100 sand, water
100-103 gravel to 4", water

8 5/8 x .250 new steel casing +1 to 103 Ft.

Static water level at 34 Ft.

Pump tested at 176 G.P.M. For 24 HR. 2 Ft. of drawdown


Cement Grout 5' to 15'

Comp. pump test 6-29-78

Maps and Miscellaneous Information

1460-8- 8

Page 5 of 5

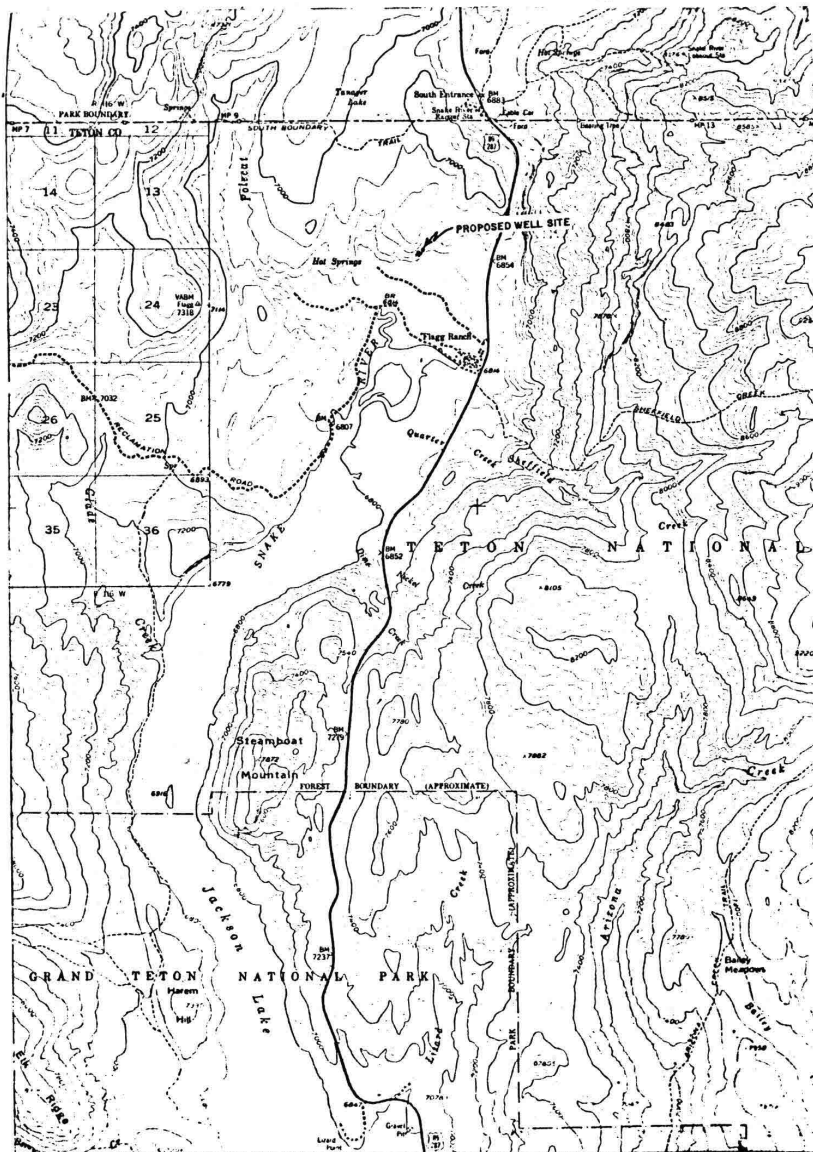

J.D. ROCKEFELLER MEM. P/W
• JACKSON
WYOMING

JOHN D. ROCKEFELLER, JUNIOR, MEMORIAL PARKWAY
c/o GRAND TETON NATIONAL PARK
MOOSE, WYOMING

Number of Documents in Docket	6		
Documents Dated from	9/6/1978	to	9/21/1978
Docket Compiled:	4/19/2011		