


GROUND-WATER CONDITIONS IN THE UPPER VIRGIN RIVER AND KANAB CREEK BASINS AREA, UTAH, WITH EMPHASIS ON THE NAVAJO SANDSTONE



STATE OF UTAH
DEPARTMENT OF NATURAL RESOURCES

Technical Publication No. 70

BIBKey 10 = ~~57915~~
657278

GROUND-WATER CONDITIONS IN THE UPPER VIRGIN RIVER AND KANAB CREEK BASINS
AREA, UTAH, WITH EMPHASIS ON THE NAVAJO SANDSTONE

by

R. M. Cordova
Hydrologist, U.S. Geological Survey

Prepared by
the United States Geological Survey
in cooperation with
The Utah Department of Natural Resources
Division of Water Rights

1981

CONTENTS

	Page
Conversion factors	VI
Abstract	1
Introduction	2
Purpose and scope of the study	2
Previous studies and acknowledgments	2
Data-site-numbering system	3
Location and general features of the study area	3
Physiography and drainage	3
Climate	6
Culture and economy	9
Geologic setting	9
General characteristics of the rocks	9
General geologic structure	11
Water resources	11
Precipitation	11
Surface water	13
Runoff	13
Chemical quality	13
Ground water	16
General conditions of occurrence	16
Unconsolidated-rock aquifers	17
Consolidated-rock aquifers	19
Hydrologic properties of aquifers	20
Recharge	27
Movement	28
Discharge	30
Seepage to streams	31
Evapotranspiration	31
Springs	33
Wells	35
Subsurface outflow	36
Storage	37
Chemical quality	41
General characteristics	41
Relation to use	47
Public supply	47
Irrigation supply	47
Temperature	49
Possible hydrologic effects of increased ground-water development	50
Interference with existing wells	50
Shift of the ground-water divide	55
Reduction of streamflow	56
Effects on chemical quality of water	56
Summary and conclusions	57
References cited	59
Publications of the Utah Department of Natural Resources, Division of Water Rights	78

ILLUSTRATIONS
[Plates are in pocket]

- Plate 1. Map showing selected geohydrologic information in the upper Virgin River basin.
2. Map showing selected geohydrologic information in the upper Kanab Creek basin.
3. Map showing general geology of the upper Virgin River and Kanab Creek basins area.

	Page
Figure 1. Diagram showing data-site-numbering system used in Utah	4
2. Map showing location of the upper Virgin River and Kanab Creek basins area	5
3. Graphs showing cumulative departure from average annual precipitation for the respective periods of record at climatologic stations in and near the study area	8
4. Streamflow hydrographs of Mill, Skutumpah, and Thompson Creeks, 1976 and 1977 water years	15
5. Graph showing estimated average monthly low flow (1937-76) of the North Fork Virgin River at site (C-41-10)22bc	16
6. Graphs showing particle-size distribution of selected rock samples	25
7. Graph showing the relation between porosity and depth for two aquifers in the upper Kanab Creek basin	28
8. Graph showing relation of horizontal permeability to the 10-percentile particle-size diameter of selected rock samples	29
9. Profile of the potentiometric surface at the divide between the upper Virgin River and Sevier River basins	32
10. Graphs showing water-level fluctuations in selected wells in the study area	39
11. Graphs showing water-level fluctuations (1976-78) in selected wells in the upper Kanab Creek basin	40
12. Graph showing relation of dissolved-solids concentration to specific conductance of ground water in the study area ...	42
13. Diagrams showing common chemical types of water from various aquifers in the study area	44
14. Diagrams showing changes in chemical quality of base flow in Johnson Canyon creek	46
15. Diagram showing classification for irrigation of selected ground-water samples from the study area	48
16. Graph showing relation of ground-water temperature to the altitude of the potentiometric surface	51
17. Graphs showing theoretical relation between drawdown and distance from a pumping well in the Navajo Sandstone for selected pumping durations	54
18. Graph showing theoretical relation between drawdown and distance from a pumping well tapping mainly the Shinarump Member of the Chinle Formation for selected pumping durations	55

TABLES

Page

Table 1.	Precipitation and temperature data for climatologic stations in the study area	7
2.	Generalized geology, yields of ground-water sources, and chemical quality of ground water	10
3.	Summary of petrographic analyses of selected rock samples ...	12
4.	Maximum discharges at three partial-records stations in the upper Kanab Creek basin, 1959-74	14
5.	Generalized descriptions of the principal unconsolidated-rock aquifers	18
6.	Porosity and permeability of selected surficial rock samples determined by laboratory analyses	22
7.	Estimated total formation porosity at selected wells as determined from electrical logs	23
8.	Results of aquifer tests in the upper Kanab Creek basin	24
9.	Specific capacities of selected wells	26
10.	Relation between precipitation and base flow in selected drainage basins	31
11.	Estimated average annual seepage of ground water to streams in the upper Kanab Creek basin, 1977	33
12.	Estimated evapotranspiration of ground water	34
13.	Springflow used for public supply, 1977	36
14.	Estimated discharge from irrigation wells in the upper Kanab Creek basin, 1976 and 1977	37
15.	Estimated amount of recoverable water in the Navajo Sandstone	38
16.	Summary of dissolved-solids concentration in ground water by aquifer	43
17.	Classification of irrigation water based on the boron content	50
18.	Records of selected wells as of June 30, 1978	62
19.	Water levels in selected observation wells	65
20.	Selected drillers' logs of wells	71
21.	Records of selected springs	73
22.	Discharge rate, temperature, and specific conductance of base flow for selected stream reaches	74
23.	Chemical analyses and temperature of water from selected wells, spring, and base-flow-measurement sites	75

CONVERSION FACTORS

Most values in this report are given in inch-pound units followed by metric units. The conversion factors are shown to four significant figures. In the text, however, the metric equivalents are shown only to the number of significant figures consistent with the accuracy of the value in inch-pound units.

<u>Inch-pound</u>			<u>Metric</u>	
<u>Unit</u> (Multiply)	<u>Abbreviation</u>	(by)	<u>Unit</u> (to obtain)	<u>Abbreviation</u>
Acre		0.4047	Square hectometer	hm ²
		0.004047	Square kilometer	km ²
Acre-foot	acre-ft	0.001233	Cubic hectometer	hm ³
		1233	Cubic meter	m ³
Cubic foot per second	ft ³ /s	0.02832	Cubic meter per second	m ³ /s
Cubic foot per day per foot	(ft ³ /d)/ft	0.0929	Cubic meter per day per meter	(m ³ /d)/m
Foot	ft	0.3048	Meter	m
Foot per mile	ft/mi	0.1894	Meter per kilometer	m/km
Gallon per minute	gal/min	0.06309	Liter per second	L/s
Gallon per min- ute per foot	(gal/min)/ft	0.2070	Liter per second per meter	(L/s)/m
Inch	in.	25.40	Millimeter	mm
		2.540	Centimeter	cm
Mile	mi	1.609	Kilometer	km
Pound-force per square inch	lbf/in ²	6.895	Kilopascal	kPa
Square foot	ft ²	0.0929	Square meter	m ²
Square mile	mi ²	2.590	Square kilometer	km ²

Chemical concentration and water temperature are given only in metric units. Chemical concentration is given in milligrams per liter. For concentrations less than 7,000 mg/L, the numerical value is about the same as for concentrations in parts per million.

Water temperature is given in degrees Celsius (°C), which can be converted to degrees Fahrenheit (°F) by the following equation:
 $^{\circ}\text{F} = 1.8(^{\circ}\text{C}) + 32.$

GROUND-WATER CONDITIONS IN THE UPPER VIRGIN RIVER
AND KANAB CREEK BASINS AREA, UTAH, WITH
EMPHASIS ON THE NAVAJO SANDSTONE

by

R. M. Cordova
Hydrologist, U.S. Geological Survey

ABSTRACT

The upper Virgin River and Kanab Creek basins area occupies parts of Iron, Kane, and Washington Counties in south-central Utah. It includes about 1,300 square miles (3,370 square kilometers) in the upper Virgin River basin and about 650 square miles (1,680 square kilometers) in the upper Kanab Creek basin. The area is sparsely populated with Kanab (population about 1,400 in 1975) being the largest community. Although the area is largely agricultural, it is known to contain large coal reserves with potential for development.

Geologic units exposed in the area range in age from Permian to Holocene. The exposed rocks consist mostly of sandstone with progressively lesser amounts of unconsolidated rocks, siltstone, mudstone, shale, limestone, igneous rocks, conglomerate, and coal. The strata dip generally less than 5° to the north and are cut by a number of northeasterly and northwesterly trending faults, the largest being the Hurricane, Sevier, and Paunsaugunt Faults.

Ground water occurs in both the unconsolidated and consolidated rocks. Principal aquifers in the unconsolidated rocks include older stream-channel deposits in the lower reaches of Johnson Canyon and Kanab Creeks, lower parts of alluvial fans along the bases of higher terraces, and stream-valley alluvium along the alluvial plains of the Virgin River, Short Creek, Gould Wash, and upper reaches of Johnson Canyon and Kanab Creeks.

The most important consolidated-rock aquifer is the Navajo Sandstone of Triassic(?) and Jurassic age. This formation contains an estimated 200 million acre-feet ($250,000 \text{ hm}^3$ [cubic hectometers]) of recoverable water and has been tapped by a number of large-yield wells in the upper Kanab Creek basin. Other consolidated-rock aquifers of note include the Shinarump Member of the Chinle Formation of Triassic age, sandstone strata of Cretaceous age, and the Wasatch Formation of Tertiary age.

Ground-water recharge in the area is estimated to average about 80,000 acre-feet (100 hm^3) per year. The water enters the aquifers by direct infiltration of precipitation or seepage from streams chiefly in the headwaters of the Virgin River and Kanab Creek; it moves generally southward to areas of natural discharge chiefly in the lower reaches of the Virgin River, Kanab Creek, and their larger tributaries. Discharge in 1977 was at least 71,000 acre-feet (90 hm^3), broken down as follows: seepage to streams, 50,000 acre-feet (62 hm^3); evapotranspiration, 10,000 acre-feet (12 hm^3); springflow, 2,740 acre-feet (3.4 hm^3); subsurface outflow, 5,000 acre-feet

(6.2 hm³); and withdrawal from wells, 3,260 acre-feet (4.0 hm³). The difference in the estimates of recharge and discharge results from inherent inaccuracies in the methods used to arrive at the two figures. It does not represent an imbalance between ground-water recharge and discharge.

Chemical quality of the ground water varies considerably both areally and by geologic source. The water is generally fresh, containing less than 500 milligrams per liter of dissolved solids in the recharge areas. Water in the Navajo Sandstone is also generally fresh. Dissolved-solids concentrations of 41 water samples collected from the Navajo ranged from 74 to 905 milligrams per liter and averaged about 270 milligrams per liter. The most saline waters, generally containing 1,000 to 3,000 milligrams per liter, were found in the Carmel Formation of Jurassic age and the Chinle and Moenkopi Formations of Triassic age.

Several field aquifer tests made in the area, chiefly involving the Navajo Sandstone, indicated that increased ground-water withdrawals in the area could result in increased interference between wells, a reduction of streamflow, and possible changes in water quality. It might also cause a shift of the ground-water drainage divide, whereby some ground water would be diverted into the area from adjacent drainage basins.

INTRODUCTION

Purpose and scope of the study

This report presents the results of a 2-year study by the U.S. Geological Survey in cooperation with the Utah Division of Water Rights to evaluate ground-water conditions in the upper Virgin River and Kanab Creek basins area of Utah. Fieldwork for the study was started in July 1976 and was completed in August 1978.

The purpose of the study was to obtain information needed about the ground-water system in the area to (1) help resolve existing water-right problems and (2) determine hydrologic effects of possible large increases in ground-water withdrawals for the development of the area's large coal reserves. Emphasis of study was on the Navajo Sandstone aquifer, which has been tapped by a number of large-yield wells in the area and which is a possible source of water for coal development.

The study was of a reconnaissance nature in the upper Virgin River basin where there was relatively little development of ground water by wells; it was more detailed in the Kanab Creek drainage basin where hydrologic data were most abundant. The study included some local geologic mapping, but consisted chiefly of collection and evaluation of hydrologic data including well and spring inventories, aquifer tests, seepage studies, and laboratory analyses of rock and water samples.

Previous investigations and acknowledgments

Previous hydrologic investigations in the area of this report include those by Goode (1964, 1966), Sandberg (1979), and Price (1980). In addition, the hydrology of part of the area is described in energy-related environmental assessments (U.S. Department of the Interior, 1975, 1979a). The geology of

the area has been mapped by a number of workers. Principal sources of geologic information used in this report are Stokes (1964), Cook (1960), and Gregory (1950, 1951).

Personnel of various Federal, State, and local governmental agencies and private organizations provided information which facilitated the progress of this investigation. Their assistance is gratefully acknowledged as is the cooperation of landowners in the area who allowed access to their property to collect hydrologic data.

Data-site-numbering system

The system of numbering wells, springs, and other hydrologic-data sites in Utah is based on the cadastral land-survey system of the U.S. Government. The number, in addition to designating the data site, describes its position in the land net. By the land-survey system, the State is divided into four quadrants by the Salt Lake base line and meridian, and these quadrants are designated by the uppercase letters A, B, C, and D, indicating the northeast, northwest, southwest, and southeast quadrants, respectively. Numbers designating the township and range (in that order) follow the quadrant letter, and all three are enclosed in parentheses. The number after the parentheses indicates the section and is followed by three letters indicating the quarter section, the quarter-quarter section, and the quarter-quarter-quarter section --generally 10 acres (4 hm^2);¹ the letters a, b, c, and d indicate, respectively, the northeast, northwest, southwest, and southeast quarters of each subdivision. The number after the letters is the serial number of wells or springs within the 10-acre (4-hm^2) tract (the letter "S" preceding the serial number denotes a spring). Other hydrologic-data sites in this report, such as streamflow-gaging sites, do not have serial numbers. If a data site cannot be located within a 10-acre (4-hm^2) tract, one or two location letters are used and the serial number is omitted, even if a well or spring. For example, the number (C-42-5)27aaa-1 designates the first well constructed or visited in the NE $\frac{1}{4}$ NE $\frac{1}{4}$ NE $\frac{1}{4}$ sec. 27, T. 42 S., R. 5 W., and (C-41-13)25c-S designates a spring known only to be in the SW $\frac{1}{4}$ sec. 25. The numbering system is illustrated in figure 1.

LOCATION AND GENERAL FEATURES OF THE STUDY AREA

Physiography and drainage

The area of this report includes parts of Iron, Kane, and Washington Counties in south-central Utah (fig. 2). It includes about $1,300 \text{ mi}^2$ ($3,370 \text{ km}^2$) in that part of the Virgin River basin east of the Hurricane Cliffs and about 650 mi^2 ($1,680 \text{ km}^2$) in the upper Kanab Creek basin including the area drained by Johnson Canyon creek.

¹Although the basic land unit, the section, is theoretically 1 mi^2 (2.6 km^2), many sections are irregular. Such sections are subdivided into 10-acre (4-hm^2) tracts, generally beginning at the southeast corner, and the surplus or shortage is taken up in the tracts along the north and west sides of the section.




Figure 1.— Data-site-numbering system used in Utah.




Figure 2.— Location of the upper Virgin River and Kanab Creek basins area.

The area is characterized by broad plateaus and mesas that have been deeply dissected by the Virgin River, Kanab Creek, and their larger tributaries. Local relief in the area commonly exceeds 1,000 ft (300 m); total relief is nearly 7,000 ft (2,130 m) with altitudes ranging from about 3,100 ft (940 m) where the Virgin River flows through the Hurricane Cliffs to more than 10,000 ft (3,000 m) in the headwaters of North Fork Virgin River.

The area is drained entirely by the Virgin River and Kanab Creek, which are directly tributary to the Colorado River. Both streams are perennial within the study area as are their tributaries that head at altitudes of more than 7,000 ft (2,130 m). Most of the tributaries that head at altitudes of less than 7,000 ft (2,130 m) are intermittent or ephemeral.

Irrigation practices during about the past 120 years have accelerated erosion along several streams in the area. Diversion dams built by the pioneers on Kanab Creek near Kanab and Johnson Canyon creek near the mouth of Johnson Canyon have collapsed several times under the stress of stored water. The resulting floods scoured out large volumes of the stream-valley alluvium leaving the channels of the two streams (and some of their tributaries) much deeper than could be expected under natural conditions. Some of the deepening is also attributed to natural flooding, including a major flood in the early 1950's.

Measurements in 1967 by M. E. Cooley (U.S. Geological Survey, written commun., 1979) showed that the channel of Kanab Creek has been deepened as much as 105 ft (32 m) about 2 mi (3.2 km) upstream from Kanab. Hand leveling by the writer during this study indicated that the channel of Johnson Canyon creek has been deepened as much as 40 ft (12 m) near the Arizona-Utah State line. Both streams are locally flowing on consolidated rock (where stream-valley alluvium has been eroded away) and receive influent seepage of water directly from those rocks.

Climate

The climate of the study area ranges from semiarid in the lower southern part to subhumid in the higher northern part. Normal annual precipitation ranges from less than 12 in. (305 mm) in the vicinity of Kanab to about 40 in. (1,016 mm) in the headwaters of North Fork Virgin River (pls. 1 and 2). It should be noted, however, that the amount of precipitation varies considerably from year to year and over the long term as shown by the cumulative-departure graphs in figure 3.

Most of the seasonal precipitation occurs during midwinter and late summer months (table 1). Winter precipitation generally results from frontal-type storms and occurs as snow which accumulates on the highest plateaus until the late spring-early summer snowmelt-runoff period. Summer precipitation generally results from local convection-type storms and occurs as torrential rain which runs off rapidly, commonly as flash floods.

Air temperatures vary widely throughout the area. Mean daily temperatures in January range from about 40°F (4.5°C) at the lower altitudes to -28°F (-2.0°C) at the higher altitudes; mean daily July temperatures range from near 84°F (29.0°C) at the lower altitudes to near 66°F (19.0°C) at the higher altitudes (see table 1). Daily extreme temperatures commonly exceed

Table 1.—Precipitation and temperature data for climatologic stations in the study area

[P, precipitation, in inches; T, temperature, in degrees Fahrenheit]

Station: See plates 1 and 2.

Station	1941-70 averages					
	Alton		Kanab		Zion National Park	
	7,040 feet		4,985 feet		4,050 feet	
Altitude	P	T	P	T	P	T
January	1.90	27.1	1.47	35.2	1.55	40.2
February	1.49	29.7	1.10	39.3	1.58	44.6
March	1.48	33.2	1.21	43.9	1.69	49.3
April	1.25	42.2	.89	52.1	1.27	58.0
May	.78	50.5	.60	60.6	.69	67.5
June	.64	58.4	.44	69.1	.62	76.7
July	1.43	66.2	.88	76.4	.84	84.2
August	1.94	64.5	1.55	74.4	1.57	81.8
September	1.23	58.0	.75	68.0	.80	75.7
October	1.19	48.2	.95	57.3	1.04	64.0
November	1.26	36.9	.96	45.1	1.16	50.4
December	1.79	29.5	1.41	36.9	1.55	41.6
Average annual	16.38	45.4	12.21	54.9	14.36	61.2
1975-77 total annuals						
1975	14.45		13.02		13.58	
1976	12.24		9.63		8.66	
1977	11.53		7.30		12.23	

100°F (38.0°C) at the lower altitudes during the summer and commonly drop below 0°F (-18.0°C) at the higher altitudes during the winter.

Annual evaporation rates in the area are high. According to Kohler and others (1959, pl. 2), average annual pan-evaporation rates range from about 75-85 in. (1,905-2,159 mm). Those values were determined largely from low-altitude stations and therefore may be high when applied to the higher altitudes of the Virgin River basin. Nevertheless, evaporation rates throughout the area are sufficient to significantly reduce the availability of water for runoff and ground-water recharge and to significantly affect the consumptive use of both surface and ground water.




Figure 3.— Cumulative departure from average annual precipitation for the respective periods of record at climatologic stations in and near the study area.




Figure 3.— Continued.

Culture and economy

The area was settled by the Mormon pioneers in the late 1850's. It is sparsely populated with widely scattered ranches and community centers, mostly along the perennial streams. Kanab, with a population of about 1,400 in 1975, is the largest community in the area. Agriculture, including irrigation and livestock grazing, provides the economic base. Irrigation is mainly by diversion from the Virgin River and Kanab and Johnson Canyon Creeks. The area is known for its scenic beauty and attractive setting for filming movies. These are also important to the local economy as are the area's large coal reserves.

GEOLOGIC SETTING

General characteristics of the rocks

Geologic units exposed in the upper Virgin River and Kanab Creek basins area are shown on plate 3 and described briefly in table 2. They range in age from Permian to Holocene and consist of consolidated and unconsolidated rocks. Sandstone is the dominant exposed rock type with progressively lesser amounts of unconsolidated rocks, siltstone, mudstone, shale, limestone, igneous rocks,

Table 2.--Generalized geology, yields of ground-water sources, and chemical quality of ground water

Unit: See plate 3.

Approximate maximum thickness: Based partly on Gregory (1950 and 1951), partly on Hintze (1976), and partly on determinations made by the writer for this study. Numbers rounded to one or two significant figures.

Type of material: Based partly on Gregory (1950 and 1951) and partly on field observations by the writer during this investigation.

Yields of wells and springs: Small 10 gal/min or less; moderate 10 to 100 gal/min; large 100 to 1,000 gal/min.

Water quality: Freshwater has a dissolved-solids concentration of less than 1,000 mg/L; slightly saline water 1,000 to 3,000 mg/L; moderately saline water 3,000 to 10,000 mg/L.

Geologic age	Unit	Approximate maximum thickness (feet)	Type of material	Yields of wells and springs	Water quality	Remarks
Quaternary	Basalt	500	Flow rock, pyroclastics, and black (some gray) cindercones	Small to large	Fresh to slightly saline	
	Valley fill	300	Inconsolidated sedimentary materials ranging from clay to boulders	do.	Fresh to moderately saline	Many irrigation and some public-supply wells are in this unit.
Tertiary	Wasatch Formation	1,300	Limestone and calcareous sandstone, conglomeratic at base; generally light colored	Small	Fresh	A major source of base flow.
Cretaceous	Kaiparowits Formation	750	Arkosic sandstone and sandy shale	Small to large	do.	Do.
	Ukiahup Sandstone	1,600	Buff, gray, or yellow sandstone (massive); minor shale	do.	Fresh to slightly saline	Do.
	Straight Cliffs Sandstone	1,500	Black shale, sandstone, and coal	Small to moderate	do.	
	Tropic Shale	100	Yellow and white sandstone; coal bearing	Unknown	do.	
Jurassic	Undivided; excludes Carmel Formation	1,400	Banded red and white sandstone, limestone, and gypsum	Small to moderate	do.	
	Carmel Formation	300	Limestone, sandstone, shale, and some gypsum	do.	Slightly saline	
Jurassic and Triassic(?)	Navajo Sandstone	2,000	Mainly quartzose but some arkosic reddish-brown and gray sandstone (massive-bedded, mainly fine grained, generally loosely cemented)	Small to large	Fresh	Many irrigation and most public-supply wells are in this unit. Dissolved-solids concentration of water produced generally less than 250 mg/L.
Triassic(?)	Kayenta Formation (exclusive of Tenney Canyon Tongue)	200	Siltstone, very fine to fine-grained sandstone, reddish-brown shale (minor)	Small to moderate	do.	
	Moenave Formation	400	Very fine to coarse-grained sandstone, siltstone, minor limestone, and light-reddish-brown, gray, and green conglomerate	do.	do.	
Triassic	Chinle Formation	1,200	Siltstone, shale, dark-red and purple sandstone	do.	Fresh to slightly saline	
	Shinarump Member of the Chinle Formation	130	Medium- to coarse-grained sandstone, white, gray, and yellow conglomerate (contains woody plant remains; generally loosely cemented)	Small to large	Fresh to moderately saline	Some irrigation and public-supply sources are in this unit.
	Moenkopi Formation	1,800	Siltstone, very fine grained sandstone, shale, gypsum, red, green, and purple limestone (minor)	Small to moderate	Jo.	
Permian	Kaibab Limestone	850	Limestone (massive), dolomite, gypsum locally, dark-gray chert locally	Small to large	do.	
	Undivided sequence in which the Coconino Sandstone is the thickest unit	1,800	White to gray sandstone (cross-bedded); some limestone	Unknown	Unknown	

conglomerate, and coal. Many of those rocks have been noted in drillers' logs of wells (table 20). Most of the sandstone units are loosely to moderately cemented and contain impurities such as weathered feldspar, as well as quartz sand grains. The Navajo Sandstone of Triassic(?) and Jurassic age is the most extensive sandstone formation in the area.

According to geologists who have worked in the area, the Navajo Sandstone intertongues with the Kayenta Formation of Triassic(?) age; two such tongues have been recognized. (See Averitt and others, 1955.) The Lamb Point Tongue of the Navajo Sandstone, which directly overlies the Kayenta, is about 400 ft (120 m) thick in Kanab Creek canyon. It thickens easterly to about

520 ft (160 m) in Johnson Canyon and thins westerly to where it pinches out about 12 mi (20 km) southwest of Kanab. The Tenney Canyon Tongue, which is part of the Kayenta Formation (but considered as part of the Navajo Sandstone aquifer in this report), overlies the Lamb Point Tongue. It is about 120 ft (37 m) thick in Kanab Creek canyon and thins easterly to where it pinches out east of the study area. The main body of the Navajo overlies the Tenney Canyon Tongue where it consists of a lower red member and an upper white member. In the study area, the maximum thickness of the red member is 800 ft (240 m) and that of the white member about 1,000 ft (300 m).

Petrographic analyses of selected rock samples (table 3) show that the Navajo Sandstone includes subarkoses (sandstone with significant feldspar) and orthoquartzite (sandstone with small amounts of feldspar and other minerals). Almost all the Navajo samples were poorly cemented, indicating generally poor cementation in much of the formation. This, along with local fracturing and jointing, contribute to the relatively high overall porosity and permeability of the Navajo compared to the other consolidated-rock units. However, well-cemented, poorly permeable horizons exist locally in the Navajo Sandstone aquifer (including the Lamb Point and Tenney Canyon Tongues) that impede vertical movement of ground water. This is indicated by springs that emerge from above those horizons.

General geologic structure

Geologic formations in the study area generally dip to the north, northeast, or northwest at angles of less than 5° (commonly about 3°) and from 5° to 10° adjacent to faults. The dips probably have some local control on the movement of ground water.

Faults, which also have some control on the movement of ground water, are common throughout the study area. Most are normal faults and strike northeasterly and northwesterly. They include the Hurricane, Sevier, and Paunsaugunt Faults (pl. 3), which are of major scale in both length and vertical displacement. The Kanab Creek and Johnson Creek Faults (pl. 3) were mapped by the writer during this study. Vertical displacement of the Kanab Creek Fault probably does not exceed 100 ft (30 m) and that of the Johnson Creek Fault probably does not exceed 200 ft (60 m).

Joints are common in the study area, and open joints are especially common in the sandstone formations like the Navajo Sandstone and the Shinarump Member of the Chinle Formation. However, jointing is not consistently well developed throughout the study area. Jointing seems to be more highly developed in the upper Virgin River basin than in the upper Kanab Creek basin. This is especially true of the Navajo which is highly jointed in Zion National Park.

WATER RESOURCES

Precipitation

Based on a map showing 1931-60 normal annual precipitation in Utah (U.S. Weather Bureau, no date), the average annual volume of precipitation in the study area is about 2 million acre-ft ($2,470 \text{ hm}^3$)--about 1,375,000 acre-ft

Table 3.—Summary of petrographic analyses of selected rock samples

[Analyses by Core Laboratories, Inc., Dallas, Tex.]

Location: See data-site-numbering system.

Location	Rock unit	Rock type	Mineral content	Remarks
(C-41-5) 13bcc	White member of the Navajo Sandstone	Siliceous submature subarkose	Mainly quartz; lesser amounts of feldspar, chert, and calcite	Poorly cemented by authigenic quartz overgrowths; calcite and chert
(C-41-8) 25daa	do.	Supermature ortho-quartzite	Mainly quartz; minor chert and feldspar	Poorly cemented by quartz overgrowths and authigenic chert
(C-42-5) 2cdc	Red member of the Navajo Sandstone	do.	Mainly quartz; minor feldspar and rock fragments	Do.
23bbb	do.	Bimodal mature subarkose	Mainly quartz; minor feldspar and chert	Do.
26ccc	Lamb Point Tongue of the Navajo Sandstone	Submature subarkose	Mainly quartz; feldspar common; some chert	Poorly cemented by authigenic chert and minor secondary quartz and hematite
(C-42-6) 30abb	Red Member of the Navajo Sandstone	do.	Quartz and feldspar	Poorly cemented by authigenic quartz
31dac	Lamb Point Tongue of the Navajo Sandstone	Clayey bimodal submature subarkose	Mainly quartz; feldspar and authigenic clay common; some chert	Tightly packed grains with clay matrix
(C-42-7) 10bdd	Red member of the Navajo Sandstone	Hematitic submature subarkose	Mainly quartz; feldspar and rock fragments common	Poorly cemented by specular hematite and dolomite and secondary quartz overgrowths
(C-43-5) 24abd	Moenave Formation	do.	Mainly quartz and feldspar; some chert and rock fragments	Poorly cemented by specular hematite and secondary quartz overgrowths and a carbonate
(C-43-6) 16bcd	do.	do.	Mainly quartz; feldspar common; some chert	Poorly cemented by specular hematite carbonate and secondary quartz overgrowths
(C-44-5) 2aca	Shinarump Member of the Chinle Formation	Calclitic submature quartzarenite	Mainly quartz; some chert and feldspar	Partially cemented by authigenic quartz overgrowths and calcite

(1,700 hm³) in the upper Virgin River basin and 625,000 acre-ft (770 hm³) in the upper Kanab Creek basin. Most of this precipitation is consumed by evapotranspiration and sublimation at or near the place of fall, some reaches streams as overland runoff, and some seeps deeply into the rocks where it enters the ground-water system.

Surface water

Runoff

As noted above, the study area is drained entirely by the Virgin River and Kanab Creek. Both streams receive most of their flow as snowmelt runoff from the high headwaters areas, but also receive significant flow from torrential summer rains and influent ground-water seepage (base flow).

The U.S. Geological Survey operates a gaging station (09408150) on the Virgin River about 6.2 mi (10 km) west of Hurricane (and downstream from a number of irrigation diversions). Average annual gaged runoff at that station for 11 years of record between 1967 and 1978 was 302 ft³/s (8.5 m³/s). The peak recorded discharge was 17,300 ft³/s (490 m³/s), which occurred March 5, 1979 (U.S. Geological Survey, 1978, p. 230).

Runoff from the upper Kanab Creek basin also occurs mainly during the spring snowmelt period as indicated by the hydrographs in figure 4. However, instantaneous peak discharges of several hundred to more than 1,000 ft³/s (30 m³/s) have been recorded in the basin (table 4), commonly the result of summer cloudburst activity. Based on stream-channel-geometry measurements (Moore, 1968) in Kanab and Johnson Canyon Creeks near the Arizona-Utah State line, total mean annual runoff from the upper Kanab Creek basin into Arizona is on the order of 50,000 acre-ft (62 hm³).

Ground-water seepage to streams generally is the main source of flow (base flow) of perennial streams during dry summer months and periods of drought. As part of this study, measurements were made of the ground-water component of streamflow in the upper Virgin River and Kanab Creek basins (table 22). These measurements not only indicate low flows in perennial streams but are also useful in estimating ground-water recharge and discharge. Measurements during September-November are best for this purpose because (1) overland runoff is at a minimum, (2) consumptive use of ground water is at a minimum, and (3) ice has not yet formed in streams to affect measurements.

Figure 5 shows average monthly low flow in North Fork Virgin River at site (C-41-10)22bc as estimated from streamflow measurement made at U.S. Geological Survey gaging station 09405500 at site (C-41-10)22bc. According to those estimates, ground water contributes as much as 43 percent of the average annual flow of the stream at that site.

Chemical quality

Dissolved-solids concentrations of surface water in most parts of the study area are generally less than 1,000 mg/L (milligrams per liter) during both high and low flow periods. (See Price, 1980.) The dissolved-solids concentrations in the headwaters of both the Virgin River and Kanab Creek are

**Table 4.—Maximum discharges at three partial-record (crest-gage)
stations in the upper Kanab Creek basin, 1959-74**

Date of maximum discharge	Discharge (ft ³ /s)	Date of maximum discharge	Discharge (ft ³ /s)
Kanab Creek at site (C-40-6)3a			
(Drainage area, approximately 72 square miles)			
Mar. 1960	120	July 11, 1968	2,080
Sept. 8, 1961	1,300	Aug. 12, 1969	630
Feb. 12, 1962	780	Aug. 18, 1970	1,700
Sept. 18, 1963	1,600	July 30, 1971	1,370
Aug. 12, 1964	500	April 9, 1972	530
April 10, 1965	250	Oct. 11, 1973	1,140
July 30, 1966	290	1974	29
Dec. 6, 1966	1,240		
Johnson Canyon at site (C-43-4½)30c prior to 1960 and at site (C-43-4½)24d after 1960			
(Drainage area, 237 square miles)			
Sept. 17, 1961	1,300 ¹	Aug. 13, 1968	960
Sept. 28, 1962	1,200	Aug. 12, 1969	1,950
Aug. 19, 1963	1,540	Aug. 18, 1970	2,750
Oct. 18, 1963	1,100	July 20, 1971	2,100
April 9, 1965	65	Aug. 12, 1972	240
July 23, 1966	1,500	April 30, 1973	520
Sept. 25, 1967	2,000	1974	950
Kanab Creek at site (C-43-6)5c			
(Drainage area, 198 square miles)			
Aug. 3, 1959	160	Aug. 12, 1964	600
Sept. 6, 1960	2,100	Mar. 13, 1965	640
Sept. 8, 1961	3,030	Dec. 6, 1966	1,230
Feb. 12, 1962	1,400	July 7, 1968	1,300
Aug. 31, 1963	1,310		

¹ Estimated.

generally less than 250 mg/L, but increase to more than 500 mg/L in the lower stream reaches during low flow periods. Principal sources of the dissolved solids are shale and siltstone strata of Triassic and Cretaceous age over which the streams flow, and influent seepage of ground water from those strata.




Figure 4.— Streamflow hydrographs of Mill, Skutumpah, and Thompson Creeks, 1976 and 1977 water years.

Dissolved-solids concentrations in the reach of the Virgin River that cuts through the Hurricane Cliffs commonly exceed 1,000 mg/L. This is due chiefly to inflows from La Verkin Hot Springs (table 21) which contain more than 9,000 mg/L of dissolved solids. The reach of Kanab Creek downstream from Kanab also commonly contains more than 1,000 mg/L of dissolved solids owing largely to return flows and influent seepage from the Chinle and Moenkopi Formations. Selected chemical analyses of base flow at several sites in the project area are given in table 23.




Figure 5.— Average monthly low flow (1937-76) of the North Fork Virgin River at site (C-41-10)22bc.

Ground water

General conditions of occurrence

Water occurs in both the consolidated and unconsolidated rocks that underlie the upper Virgin River and Kanab Creek basins. In most of the consolidated rocks, the water occupies open joints and fractures. In the unconsolidated rocks and some of the poorly cemented consolidated rocks, such as parts of the Navajo Sandstone and Shinarump Member of the Chinle Formation, the water occupies intergranular spaces.

The regional water table in the study area is generally at or near the base level of the most deeply incised perennial streams. The rocks that extend beneath the regional water table are in the main zone of saturation—that is, all available pore space in those rocks contain water and comprise the main ground-water reservoir in the area. The rocks that extend above the regional water table contain only local perched ground-water bodies. In the unconsolidated rocks, the perched ground water accumulates above poorly permeable clay strata or consolidated rock on which the unconsolidated rocks lie. In the consolidated rock, the perched water accumulates generally in fractured or poorly cemented sandstone above shale or other poorly permeable rock strata. There are numerous perched ground-water bodies throughout the study area, but because of their limited extent and limited recharge most are not capable of sustaining large withdrawals from wells or the flow of large springs.

Unconsolidated-rock aquifers

Unconsolidated rocks contain important aquifers in several areas (table 5). Most of these aquifers are in stream deposits, including alluvial fans and older stream-channel deposits. Alluvial fans attain significant proportions when formed at the base of high escarpments such as the Vermilion Cliffs. However, the potential for development of ground water in the alluvial fans is not significant because the upper parts of those fans are generally above the regional water table and generally unsaturated. Also, their lower parts, where saturated, yield water slowly to wells. For example, several wells in the higher part of the Vermilion Terrace (in sec. 30, T. 43 S., R. 4 W.) penetrated at least 50 ft of dry alluvial-fan deposits before encountering water in the underlying consolidated rock. The wells that tap the saturated fan deposits at lower altitudes generally have small yields.

Older stream-channel deposits occur beneath fine-grained surficial deposits in several parts of the study area (table 5). Aquifers in those deposits probably have greater potential for development by wells than do the alluvial fans, because in most cases the older stream-channel deposits extend beneath the regional water table and are fully saturated.

Two aquifers in older stream-channel deposits exist in the lowland between the Vermilion Cliffs and the Shinarump Cliffs. They are in the channels of Kanab Creek near Kanab and Johnson Canyon creek near Crescent Butte (pl. 2). The aquifer near Crescent Butte is in about 150 ft (46 m) of alluvium consisting largely of sand and gravel. This aquifer would not have been known without drilling of wells, because it is concealed beneath a mantle of fine-grained alluvial-fan and aeolian deposits. The deposits that form this aquifer were apparently laid down by an ancestral stream in Johnson Canyon that was much larger than the present stream. This ancestral stream apparently meandered over a large area, because the deposits are known to underlie an area of several square miles. Those deposits yield as much as 250 gal/min (16 L/s) of water to individual wells.

The older stream-channel deposits in Kanab Creek near Kanab apparently were laid down under similar conditions as those in Johnson Canyon near Crescent Butte. The deposits in Kanab Creek also consist largely of sand and gravel but are only on the order of 100 ft (30 m) thick. Although several wells tap these deposits, additional study will be required to ascertain the extent and development potential of the aquifer therein. Well (C-43-6)27dbd-1 (table 18), which taps the aquifer and the underlying Chinle Formation, had a measured yield of 50 gal/min (1.4 L/s), but it is not known what percentage of that yield was from the older stream-channel deposits.

There are other unconsolidated deposits throughout the study area that may contain potentially productive aquifers. Such deposits underlie the upper Skutumpah Creek drainage area, the alluvial plains of the Virgin River, Short Creek near Hildale, Gould Wash, and Johnson Canyon upstream from the deposits near Crescent Butte.

The deposits that underlie the upper Skutumpah Creek drainage (in secs. 29-32, T. 40 S., R. 4½ W., and secs. 5 and 6, T. 41 S., R. 4½ W.) are basinlike but have fingerlike extensions into Thompson and Skutumpah Creeks

Table 5.—Generalized descriptions of the principal unconsolidated-rock aquifers

Remarks: Freshwater has a dissolved-solids concentration of less than 1,000 mg/L, slightly saline water 1,000 to 3,000 mg/L, and moderately saline water 3,000 to 10,000 mg/L.

General location (See pls. 1 and 2)	Approximate maximum depth to water (feet)	Approximate maximum saturated thickness (feet)	Yields of wells (gal/min)	Remarks
Upper Johnson Canyon drainage	40	100	Reportedly several hundred	Deposit formed by alluviation at the confluence of Thompson, Skutumpah, and Red Wash Creeks. Water is fresh.
Lower Johnson Canyon	100	100	Inferred to be less than 100	Deposit formed by alluviation in a modern stream valley. Water is fresh.
Vermilion Cliffs-Shinarump Cliffs area	50	100	As much as 400 reported near the mouth of Johnson Canyon	Some deposits formed in buried channels of ancient perennial streams and some in alluvial fans. Water is fresh to moderately saline.
Valleys of the Virgin River and its main forks	60	70	Measured maximum 240	Deposit formed by alluviation in a modern stream valley. Water is fresh to slightly saline.
Hildale area	30	70	Reportedly about 200	Deposit formed by alluviation in a modern stream valley. Water is probably fresh.
Little Plains area of Gould Wash	150	200	Ranges from less than 100 to more than 600	Deposit formed in buried channel of ancient perennial stream. Water is probably fresh to slightly saline.

which have wide, flat alluvial plains. The deposits underlie 2-3 mi² (5-8 km²) as determined from field reconnaissance. Their total thickness, based on data from only a few wells, is on the order of 100 ft (30 m) and may be greater locally. Depths to water in the deposits are less than 40 ft (12 m), but data from wells in the area indicate that the water is perched--that is, underlain by unsaturated rock.

The alluvial plain of East Fork Virgin River is generally less than 0.25 mi (0.4 km) wide from Long Valley Junction to near Rockville, although there are a few wider but short reaches where farming communities have become established. The alluvial plain of North Fork Virgin River is less than 0.20 mi (0.3 km) wide upstream from the confluence of Pine Creek but is generally wider downstream near Rockville. From Rockville to near Virgin, the alluvial

plain of the main stem of the Virgin River is generally between 0.25 and 0.40 mi (0.4-0.6 km) wide. Below Virgin there is a narrow, steep-walled canyon containing little alluvial material.

The thickness of alluvium in the valleys of the Virgin River and its main forks is not uniform, differing considerably in short distances, but the general range is 30-100 ft (9-30 m). There does not seem to be any direct relation between thickness and distance downstream. For example, along East Fork Virgin River a well north of Alton Junction penetrated 105 ft (32 m) of alluvium, and one at Mount Carmel Junction penetrated 200 ft (61 m), but in the main stem at Grafton a well penetrated only 55 ft (17 m) of alluvium. The few available well-drillers' reports also indicate that there is no increase or decrease of coarse materials in a downstream direction. However, lateral differences in grain size probably exist because in alluvial deposits sequences of coarse materials commonly abut against sequences of fine materials in the stream-meander belt.

Short Creek Valley near Hildale is underlain by an alluvial deposit, which according to a few available well logs, is less than 100 ft (30 m) thick and contains mainly sand. The reported relatively high yields of existing wells (table 18) indicate that this deposit probably has a more promising potential for additional development than does the underlying consolidated rocks which probably contain saline water.

Big and Little Plains in the valley of Gould Wash are underlain by unconsolidated materials of significant thickness. Drillers' logs of several wells indicate that their thickness increases from generally less than 100 ft (30 m) near the drainage divide (in secs. 9, 10, 16-18, T. 43 S., R. 11 W.) downvalley to nearly 300 ft (91 m) in sec. 19, T. 42 S., R. 11 W. Further downvalley from sec. 19 the thickness apparently decreases to less than 200 ft (61 m) in sec. 23, T. 42 S., R. 13 W. These changes in thickness are probably a result of faulting which has downdropped the Shinarump Member of the Chinle Formation on the southwest side of the valley or to erosion by ancestral streams which cut their channels more deeply in some places than in others.

The unconsolidated deposits that underlie Johnson Wash upstream from Crescent Butte are apparently less than 150 ft (46 m) thick. Only a few wells have been drilled into these deposits, and these are only in T. 42 S., R. 5 W. There is no apparent reason why these deposits should not extend downstream from the reach where wells have already been drilled and connect with the above-mentioned older stream-channel deposits in the Crescent Butte area. It is possible that faulting has been responsible for localizing thick deposits in the canyon, and perhaps test drilling or geophysical exploration could determine their location. The maximum well yield is not known but perhaps is measurable in hundreds of gallons per minute as in the Crescent Butte area.

Consolidated-rock aquifers

There are a number of consolidated-rock aquifers in the upper Virgin River and Kanab Creek basins that have potential for development. Of these, the Navajo Sandstone is by far the most important. This formation is the thickest, has the largest area of outcrop, and is tapped by more large-yield wells than any other consolidated-rock formation. Its maximum thickness is on

the order of 2,000 ft (610 m). Its area of outcrop in the upper Kanab Creek basin is about 280 mi² (725 km²) and in the upper Virgin River basin about 297 mi² (770 km²).

The other consolidated-rock aquifers, although developed by relatively few wells, contribute to the flow of many springs and the base flow of perennial streams. They include chiefly the Wasatch Formation, sandstone strata in the Kaiparowits Formation, the Wahweap and Straight Cliffs Sandstones, the Shinarump Member of the Chinle Formation and, locally, basalt and the Kaibab Limestone.

The rate of discharge from wells and springs in the consolidated-rock aquifers differs considerably from area to area. The large range in discharge results mainly from the movement of water in open fracture systems. These fracture systems differ widely in the size and number of individual fractures in a given section of rock and in the degree of interconnection of these fractures. Hard, brittle rocks, such as basalt and quartzitic sandstone, generally tend to have larger and more extensive fracture systems than do softer, less brittle rocks, such as shale. Also, some rocks, such as the Navajo Sandstone, locally contain a significant amount of intergranular openings through which water moves between fractures.

Hydrologic properties of aquifers

Hydrologic properties, such as porosity, permeability, transmissivity, and storage coefficient of aquifers determine the ability of those aquifers to receive, store, and transmit water. They also help to predict the effect of discharging wells on water levels in other wells, and on springs and streams. These properties are defined as follows:

Porosity (n). The property of containing interstices or voids, generally expressed as the percent of a unit volume of rock or aquifer occupied by voids. Effective porosity refers to the amount of interconnected voids through which fluids can be transported and is expressed as a percent of a unit volume of rock or aquifer occupied by interconnected voids.

Permeability (hydraulic conductivity, K) of a water-bearing material is the volume of water that will move through a unit cross section of the material in unit time under a unit hydraulic gradient. The units for K are cubic feet per day per square foot [(ft³/d)/ft²], which reduces to ft/d. The term hydraulic conductivity replaces the term field coefficient of permeability, which was formerly used by the U.S. Geological Survey and which was reported in units of gallons per day per square foot. To convert to value for field coefficient of permeability to the equivalent value of hydraulic conductivity, divide by 7.48; to convert from hydraulic conductivity to coefficient of permeability, multiply by 7.48.

Transmissivity (T) is the rate at which water is transmitted through a unit width of the aquifer under a unit hydraulic gradient. The units for T are cubic feet per day per foot [(ft³/d)/ft], which reduces to ft²/d. The term transmissivity replaces the term coefficient of transmissibility, which was formerly used by the U.S. Geological Survey and which was reported in units of gallons per day per foot. To convert a value for coefficient of

transmissibility to the equivalent value of transmissivity, divide by 7.48; to convert from transmissivity to coefficient of transmissibility, multiply by 7.48.

Storage coefficient (S) of an aquifer is the volume of water it releases from or takes into storage per unit surface area of the aquifer per unit change in head. S is a dimensionless number. Under confined conditions, S is typically small, generally between 0.00001 and 0.001. Under unconfined conditions, S is much larger, typically from 0.05 to 0.30.

Tables 6-8 include values for selected aquifer properties of rocks (mostly consolidated) that comprise aquifers in the study area as determined from laboratory analyses of formation samples, geophysical logs, and field aquifer tests.

Porosity of an aquifer is an important determinant of the permeability, transmissivity, and storage capacity of the aquifers. An important determinant of the porosity of a sandstone such as the Navajo is the degree of sorting of the individual sand grains, especially where poorly cemented. The more uniform the sorting, the greater the porosity, and in turn, the greater the permeability, transmissivity, and storage capacity--depending, of course, on the degree of cementation. As shown in figure 6, the sand grains of the Navajo where sampled are well-sorted, indicating that the formation where poorly cemented has a high porosity. According to the laboratory analyses given in table 6 and the electrical logs of wells (table 7), the median value for porosity of the Navajo is about 30 percent.

Generally, porosity of a formation decreases with depth, owing largely to a greater degree of compaction of the rock with depth. As figure 7 shows, the porosity of the Moenkopi Formation where tapped by well (C-43-5)36cab-1 decreases significantly with depth. This probably is due to increased compaction of the shaly layers in this formation with depth but could also be due to facies changes in the formation. The apparent small increase in porosity of the Navajo Sandstone with depth at well (C-40-5)16cdc-1 shown in figure 7 cannot easily be explained. It possibly could be due to local breakdown in cementation with depth in the formation.

Laboratory determinations of permeability (table 6) can be used to estimate transmissivity of aquifers in areas where aquifer-test data are not available, but where the aquifer thickness is known. This may be done by multiplying the aquifer thickness by the average of the horizontal and vertical permeabilities.

Figure 8 shows the relation between horizontal permeability and the 10-percentile particle-size diameter of selected rock samples. The straight-line relation shown for the Navajo Sandstone samples can be used to estimate horizontal permeability of the Navajo, using any mechanical analyses of unweathered samples from the formation. This seems viable because of the relative uniformity in particle size (fig. 6) and high permeability of the Navajo compared to most other formations.

Results of the 12 aquifer tests conducted during this study are summarized in table 8. As shown, most of the tests involved the Navajo Sandstone

Table 6.—Porosity and permeability of selected surficial rock samples determined by laboratory analyses

[Analyses by Core Laboratories, Inc., Dallas, Tex.]

Location: See data-site-numbering system.

Porosity: Total porosity determined for an overburden pressure of 500 lbf/in²

Permeability: H, horizontal; V, vertical.

Location	Rock unit	Porosity (percent)	Permeability (K) (ft/d)	
			Horizontal	Vertical
(C-41-5)13bcc	White member of the Navajo Sandstone	25.2	3.42 .46	1.99
(C-41-8)25daa	do.	24.4	1.85 .24	5.00
(C-42-5)23bbb	Red member of the Navajo Sandstone	27.8	4.25	2.21
26ccc	Lamb Point Tongue of the Navajo Sandstone	30.1	—	—
(C-42-6)30abb	Red member of the Navajo Sandstone	27.2	4.47 .59	4.59
31dac	Lamb Point Tongue of the Navajo Sandstone	15.0	.0018	.0053
(C-42-7)10bdd	Red member of the Navajo Sandstone	30.5	6.1 .81	4.54
Median (rounded)		30.0	3.8	3.40
(C-43-5)24abd	Moenave Formation	23.7	.68	.26
(C-43-6)15bcd	do.	21.1	.068	.12
Median (rounded)		20.0	—	—
(C-44-5)2aca	Shinarump Member of the Chinle Formation	22.4	—	—

and exceeded 24-hours duration. Those tests indicate that transmissivity of the Navajo ranges from 2,500 to 14,000 ft²/d (230 to 1,300 m²/d). The higher values probably reflect the thick saturated thickness (up to 2,000 ft, or 610 m) of the Navajo in the test areas. Storage coefficients for the Navajo ranged from 1.2×10^{-3} to 1.2×10^{-2} . Rounded median values of transmissivity and storage coefficients of the Navajo are 6,000 ft²/d (600 m²/d) and 5×10^{-3} . The values used to determine possible effects of increased ground-water development (as discussed in a later section of this report) are 6,000 ft²/d (600 m²/d) and 2.0×10^{-3} .

Table 7.—Estimated total formation porosity at selected wells
as determined from electrical logs

Location: See data-site-numbering system.

Location	Rock unit	Porosity (percent)
(C-40-5)16cdc-1	Navajo Sandstone	20
	Tenney Canyon Tongue of the Kayenta Formation ¹	24
	Lamb Point Tongue of the Navajo Sandstone	28
(C-42-6)19baa-1	Red member of the Navajo Sandstone	40
Median (rounded)		30
(C-43-5)36cab-1	Shinarump Member of the Chinle Formation	20
	Moenkopi Formation	15
(C-43-5)36ccc-1	Chinle Formation	8

¹ For purposes of this investigation, it is considered to be hydraulically a part of the Navajo Sandstone.

Transmissivities of the Shinarump Member of the Chinle Formation, as determined from four aquifer tests, ranged from 900 to 6,800 ft²/d (80 to 630 m²/d). The only value for storage coefficient determined for that aquifer was 8×10^{-3} .


The specific capacity of a well is an important indicator of the ability of an aquifer to yield its water. However, it can only be used in a general way because the construction of a well and the development of the aquifer have a significant influence on the accuracy of the value determined. Theoretically, specific capacity of a well is directly related to the transmissivity of the aquifer. The specific capacities of selected wells in the study area are compiled in table 9. The values have different accuracies, but the range of values and the order of magnitude are revealing and pertinent. Where several values are available for an aquifer, the range is large. For example, the range for the Navajo Sandstone is 0.03 to 23 (gal/min)/ft [0.006 to 4.8 (L/s)/m]; the range for the Shinarump Member is 0.3 to 10.5 (gal/min)/ft [0.06 to 2.2 (L/s)/m]; the range for the unconsolidated rocks is 0.04 to 12 (gal/min)/ft [0.008 to 2.5 (L/s)/m]. The large range indicates that the water-yielding ability of the aquifer also is considerably different from place to place.

The order of magnitude of the specific capacity of the wells tapping aquifers for which several values are available can be compared by using

Table 8.—Results of aquifer tests in the upper Kanab Creek basin

Location: See data-site-numbering system.

Location	Use of well during test	Aquifer tested	Average discharge of pumped well (gal/min)	Length of test (hrs)	Maximum drawdown (ft)	Transmissivity (ft ² /d)	Storage coefficient (nondimensional)
(C-42-5) 11bdb-1	Pumped	Navajo Sandstone	600	100	28.2	5,900	—
26ccc-2	Observation	do.	530	307	2.55	7,400	1.2×10^{-2}
26cda-2	Pumped	do.	450	46	73.18	14,000	—
27aaa-1	do.	do.	370	49	40.10	13,000	—
27add-1	Observation	do.	90	53	3.74	2,500	1.2×10^{-3}
(C-42-6) 19bdc-1	do.	do.	370	119	4.2	5,300	2.4×10^{-3}
19bdc-2	Pumped	do.	370	119	61.65	4,200	—
30cda-2	do.	do.	520	110	37.69	5,200	—
(C-43-4½) 32aad-1	do.	Mainly Shinarump Member of the Chinle Formation	300	8	171	1,000	—
(C-43-5) 36cab-1	do.	Shinarump Member of the Chinle Formation	270	24	85.51	900	—
(C-44-5) 2aba-1	do.	do.	90	24	18.2	6,800	—
2bad-2	Observation	do.	30	119	.54	2,800	8×10^{-3}



EXPLANATION

Sample site	Rock unit	Inches	Classification according to Wentworth scale
1 (C-41-5)13bcc	Upper Navajo Sandstone	0.0063	Fine
2 (C-41-8)25daa	do.	.0115	Medium
3 (C-42-5)2cdc	Middle Navajo Sandstone	.0140	Do.
4 (C-42-5)23bbb	do.	.0059	Fine
5 (C-42-6)30abb	do.	.0067	Do.
6 (C-42-6)31dac	Lamb Point Tongue of Navajo Sandstone	.0059	Do.
7 (C-42-7)10bdd	Middle Navajo Sandstone	.0059	Do.
8 (C-43-5)24abd	Moenave Formation	.0069	Do.
9 (C-43-6)16bcd	do.	.0035	Very fine
10 (C-42-5)26ccc	Lamb Point Tongue of Navajo Sandstone	.0049	Do.
11 (C-44-5)2aca	Shinarump Member of Chinle Formation	.0042	Do.

(Analyses by Core Laboratories, Inc., Dallas, Tex., 1977)

Figure 6.— Particle-size distribution of selected rock samples.

Table 9.—Specific capacities of selected wells

Location: See data-site-numbering system.

Specific capacity: p, determined for a 24-hour pumping period; other values determined for shorter pumping periods.

Source of data: D, driller; G, Geological Survey; O, owner.

Location	Principal aquifer	Specific capacity [(gal/min)/ft]	Source of data
UPPER KANAB CREEK DRAINAGE BASIN			
(C-41-5) 5aaa-1	Carmel Formation	1	D
(C-42-5) 11bdb-1	Navajo Sandstone	23p	G
15bdc-1	do.	9	D
23bbb-1	do.	.7	D
26ccc-1	do	5	D
26ccc-2	do.	11	D
26cda-2	do.	6.2p	G
27aaa-1	do.	10.3p	G
34dbb-1	do.	13.3	G
(C-42-6) 19bdc-1	do.	.8	G
19bdc-2	do.	5.9p	G
30cda-2	do.	16.3p	G
(C-43-4) 30dba-1	Shinarump Member of the Chinle Formation	.5	D
(C-43-4½) 19cbc-1	Unconsolidated rocks	12	D
32aad-1	Shinarump Member of the Chinle Formation	2	G
33abb-1	do.	7	O
(C-43-5) 2bbd-1	Navajo Sandstone	1.6	D
24dca-1	Chinle Formation	5.7	O
25aaa-1	Unconsolidated rocks	2.7	O
25acd-1	do.	5.8	O
25cdb-2	do.	4	O
35aaa-1	Shinarump Member of the Chinle Formation	.08	G
36acd-1	Unconsolidated rocks	.04	G
36cab-1	Shinarump Member of the Chinle Formation and Moenkopi Formation	3.2	G
(C-43-6) 9ccc-1	Moenave Formation	.2	D
27dbd-1	Unconsolidated rocks and Chinle Formation	1	D
(C-43-7) 12bdb-1	Navajo Sandstone	.3	O
16bcc-1	do.	.03	G
16bdd-1	do	1.8	G
16dba-1	do.	2.9	G
(C-43-8) 34bbb-1	Navajo Sandstone	.4	G
(C-44-5) 2aba-1	Shinarump Member of the Chinle Formation	4.9p	G
2bad-1	do.	.3	O
2bad-2	do.	.7	G

Table 9.—Specific capacities of selected wells—Continued

Location	Principal aquifer	Specific capacity [(gal/min)/ft]	Test status
UPPER VIRGIN RIVER AREA			
(C-39-6) 4cad-1	Wasatch Formation	3.3	D
(C-40-11) 29bbd-1	Chinle Formation	.7	D
(C-41-7) 4aaa-1	Unconsolidated rocks	9	D
30bba-1	Navajo Sandstone	2	D
(C-41-9) 15ddb-1	do.	.5	D
(C-42-10) 7acb-1	Shinarump Member of the Chinle Formation	.3	O
7bdd-1	do.	1.3	D
(C-42-11) 4aaa-1	Unconsolidated rocks	.6	D
19ccc-2	Unconsolidated rocks and Moenkopi Formation	1.5	G
19ccc-3	do.	.8	D
30bad-1	do.	2	D
(C-42-12) 11aac-1	Shinarump Member of the Chinle Formation	10.5	O
23daa-1	Unconsolidated rocks and volcanic rocks	5.5	G
23dab-1	Unconsolidated rocks	8.4	O
(C-43-10) 23ddd-1	do.	3.8	D
34add-1	do.	4.4	D

averages. The rounded average for the Navajo Sandstone is 6 (gal/min)/ft [1.2 (L/s)/m], for the unconsolidated rocks is 5 (gal/min)/ft [1.0 (L/s)/m], and for the Shinarump Member is 3 (gal/min)/ft [0.62 (L/s)/m]. More of the specific capacities of the wells in the Navajo have a greater degree of accuracy because they were determined by controlled well-performance tests. The fact that the average is higher than the average for the unconsolidated rocks is a strong indication of the relatively high water-yielding potential of the Navajo.

Recharge

Natural recharge of ground water in the upper Virgin River and Kanab Creek basins is mainly by infiltration of precipitation and seepage losses from streams--mostly in areas where altitudes exceed 6,000 ft (1,830 m) and average annual precipitation exceeds 12 in. (305 mm). These areas include the headwaters of both the Virgin River and Kanab Creek. Here, water from rainstorms, melting snow, and streams seeps into jointed and fractured Cretaceous and Tertiary rocks and unconsolidated deposits that locally mantle those rocks. Some of this water eventually enters the older rocks including the Navajo Sandstone. Recharge also takes place locally at altitudes lower than 6,000 ft (1,830 m) where such relatively permeable formations as the Navajo, Shinarump Member of the Chinle Formation, the Kaibab Limestone, and Tertiary basalt are exposed.

The average annual volume of ground-water recharge in the study area was estimated by a method in which the ratio of base flow to precipitation in

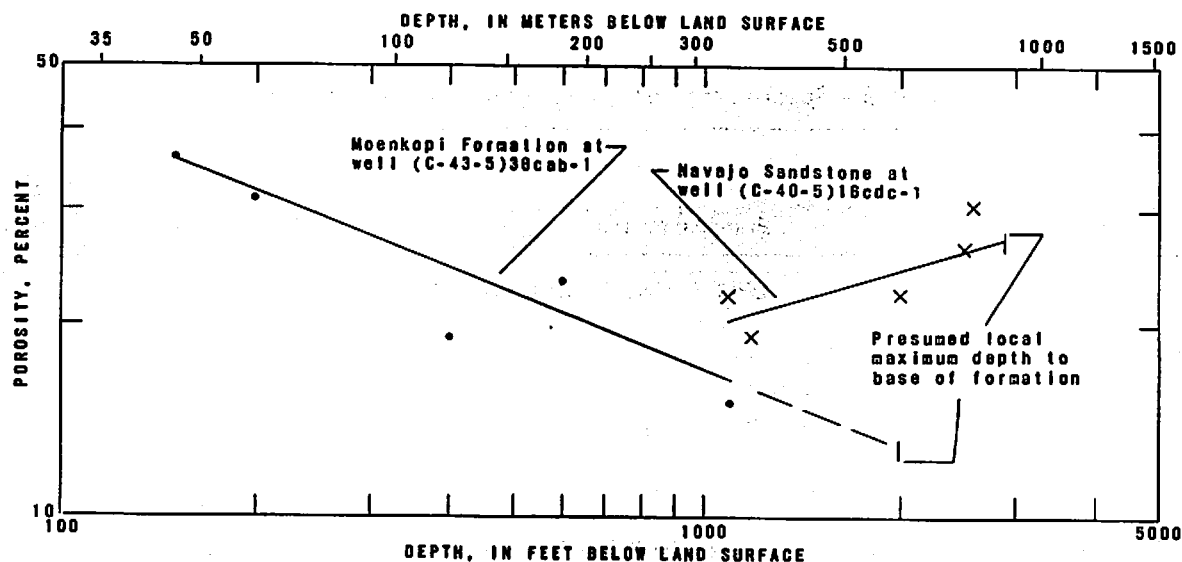


Figure 7.—Relation between porosity and depth for two aquifers in the upper Kanab Creek basin.

selected drainage basins is determined and then applied to the entire area. (See Cordova and others, 1972, p. 11.) This method assumes that all recharge in each subbasin comes from precipitation in the subbasin and that all the recharge is measured as base flow in the subbasin. The base flow, determined during periods when phreatophytes are essentially dormant, is also assumed to be constant throughout the year. The ratio of base flow to precipitation in the study area was determined to be 0.04 based in the information given in table 10. Using this value, average annual ground-water recharge was estimated to be about 80,000 acre-ft (100 hm^3) broken down as follows:

Drainage basin	Average annual precipitation (acre-feet)	Average annual ground-water recharge (acre-feet)
Upper Virgin River	1,375,000	55,000
Upper Kanab Creek	625,000	<u>25,000</u>
Total		80,000

An unknown, but significant volume of ground water enters the study area as subsurface flow from the upper Sevier River basin (which adjoins the study area on the north). The water seeps from Navajo Lake (in the Sevier River basin) and flows through solution cavities in the Wasatch Formation to areas of discharge, such as Cascade Springs (table 21), in the upper Virgin River basin. (See Wilson and Thomas, 1964.)

Movement

In the upper Virgin River and Kanab Creek basins, ground water generally moved from principal recharge areas in the northern highlands southward to

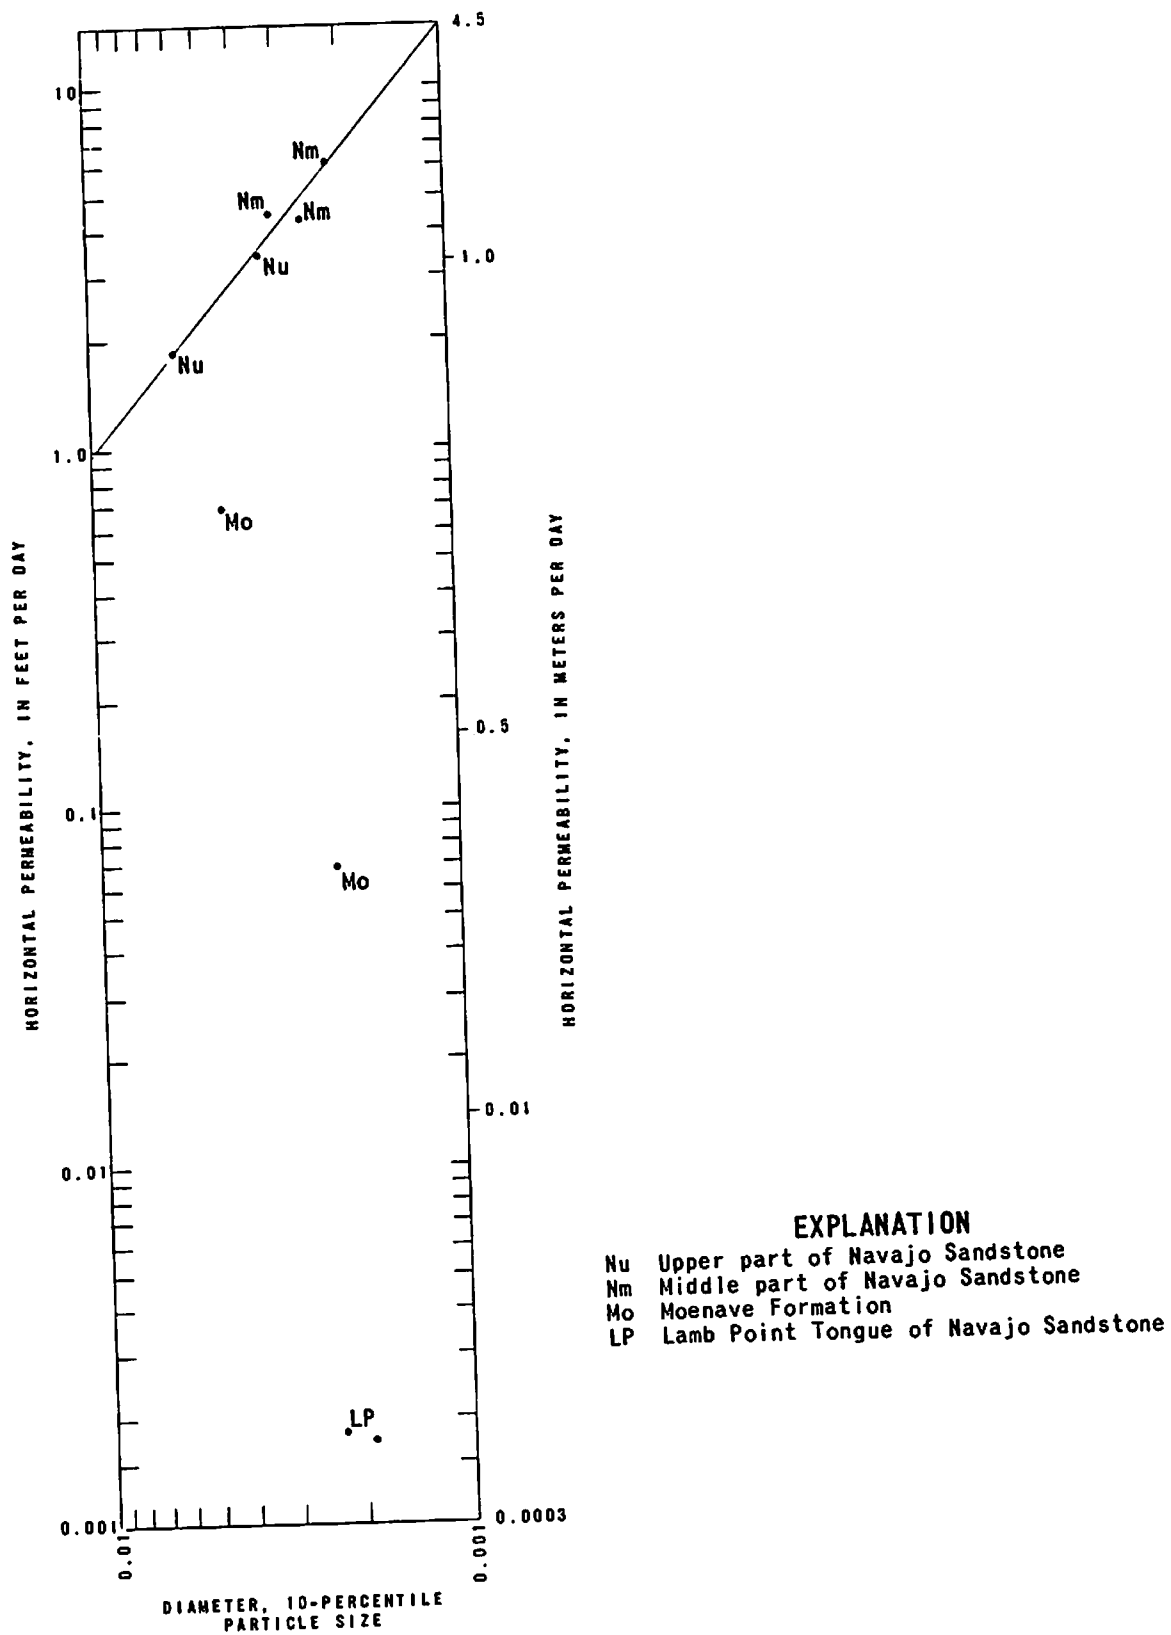


Figure 8.—Relation of horizontal permeability to the 10-percentile particle-size diameter of selected rock samples.

areas of natural discharge along the lower reaches of the larger streams. This is shown for the upper Kanab Creek basin by the potentiometric-surface contours on plate 2 and is inferred in the upper Virgin River basin on the basis of a few water-level records, ground-water-discharge measurements, and field observations. Except for the above mentioned movement of water from Navajo Lake (in the Sevier River basin) to the upper Virgin River basin, there is no significant movement of ground water into the study area from adjacent drainage basins, nor is there any indication of interbasin movement of ground water between the upper Virgin River and Kanab Creek basins within the study area. Figure 9, which is based on relatively few data, shows that the ground-water divide between the upper Virgin River and Sevier River basins is slightly south of the topographic divide between the two basins. This suggests that there is some natural movement of ground water from the upper Virgin River basin northward to the Sevier River basin. However, more accurate topographic and water-level data probably would show that the ground-water and topographic divides actually coincide with little or no interbasin flow of ground water.

The general southward gradient of the potentiometric surface in the Kanab Creek basin (pl. 2) apparently continues into Arizona as indicated by higher altitudes of water levels in wells in Utah compared to water levels in wells in Arizona. For example, the water level in well (C-44-6)5cdd-1 is about 10 ft (3.0 m) higher than the water level in a well 0.7 mi (1.1 km) to the south in Arizona. In the Virgin River basin, there is a westerly component of ground-water flow toward the Hurricane Cliffs. This is evidenced by water-level contours in Gould Wash (pl. 1) that show a downvalley ground-water gradient. Also geohydrologic data in the central Virgin River basin (Cordova and others, 1972) show that ground water moves across the Hurricane Fault from the east.

Discharge

Annual discharge of ground water in the upper Virgin River and Kanab Creek basins at the 1977 level of development is estimated to be at least 71,000 acre-ft (90 hm³) as shown in the following table:

Type of discharge	Annual rate (acre-feet)	
	Upper Virgin River basin	Upper Kanab Creek basin
Seepage to streams	42,000	8,000
Evapotranspiration	4,000	6,000
Springs	1,940	800
Withdrawal from wells	1,260	2,000
Subsurface outflow	<u>Unknown</u>	<u>5,000</u>
Totals (rounded)	49,000	22,000

The difference in the estimates of recharge and discharge results from inherent inaccuracies in the methods used to arrive at the two figures. It does not represent an imbalance between ground-water recharge and discharge.

Table 10.—Relation between precipitation and base flow in selected drainage basins

Drainage basin: Determined from topographic maps.

Annual precipitation: Estimated from U.S. Weather Bureau (no date).

Drainage basin	Area of drainage basin (acres)	Average annual precipitation (acre-feet)	Average annual base flow (acre-feet)	Period of base-flow record	Ratio of base flow to precipitation
Little Creek ¹	109,000	128,000	5,100 ²	1976-77	0.04
Highham Creek ³	6,140	10,400	220 ⁴	1975-77	.02
Little Creek ¹	3,140	5,270	220 ⁴	1975-77	.04
Arithmetic mean weighted according to area of drainage basin					.04

¹Measurement sites (C-42-6)32aca and (C-38-5)33bdd. Flows at these sites are summed.

²Average base flow estimated from measurements (table 22) to be 7 ft³/s.

³Measurement site (C-40-5)13bdb.

⁴Average base flow estimated from stream-gage record to be 0.3 ft³/s.

⁵Measurement site (C-40-4½)6add.

Seepage to streams

Seepage of ground water into stream channels (base flow) is the principal means of ground-water discharge in the study area. Most of this discharge is from the main zone of saturation but some is also from perched aquifers. The above estimates were made from measurements of base flow given in table 22 and summarized in table 11.

Although the total estimate--50,000 acre-ft (62 hm³) per year--of seepage to streams is based only on 1 year of base-flow measurements, it probably approximates the long-term annual averages. This is because, except locally, ground-water recharge and discharge (including seepage to streams) are in equilibrium over the long term.

Evapotranspiration

Evapotranspiration of ground water takes place mainly in areas of phreatophyte growth; these are areas where ground water occurs at or within a few feet of the land surface. Such conditions prevail chiefly in and next to the alluvial plains of the perennial streams. Field reconnaissance showed that the common phreatophytes in the study area include cottonwood (*Populus* sp.), saltcedar (*Tamarix gallica*), willow (*Salix* sp.), and meadowgrass (*Festuca* sp.). Locally important are greasewood (*Sarcobatus vermiculatus*), rabbitbrush (*Chrysothamnus* sp.), and Russian-olive (*Elaeagnus angustifolia*). The general areas of phreatophytic growth are shown on plates 1 and 2. The extent of the areas was determined with the aid of aerial photographs taken in September 1967 and by field reconnaissance in 1977.




Figure 9.—Profile of the potentiometric surface at the divide between the upper Virgin River and Sevier River basins.

Saltcedar is a phreatophyte of special interest because it uses large amounts of ground water and spreads rapidly. This plant, according to reports of local residents, has been in the Kanab Creek basin for at least 50 years. Today, it is still in all the major stream valleys of the study area. Russian-olive was introduced into the Kanab Creek basin for windbreaks in the 1940's. Today, single trees or small stands are seen throughout the area. Estimated evapotranspiration of ground water by these and other plants in various parts of the study area are given in table 12.

Table 11.—Estimated average annual seepage of ground water to streams in the upper Kanab Creek basin, 1977 (estimated from data in table 22)

Stream	Average annual seepage		Geologic source
	Cubic feet per second (rounded)	Acre-feet (rounded)	
Kanab Creek	5.1	3,700	Navajo Sandstone
Do.	1.7	1,230	Kayenta, Moenave, and Chinle Formations
Tiny Canyon creek	.11	80	Navajo Sandstone and Kayenta Formation
Hog Canyon creek	.22	160	Do.
Johnson Canyon creek	.64	460	Navajo Sandstone
Do.	.26	190	Kayenta, Moenave, and Chinle Formations
Do.	.25	180	Shinarump Member of the Chinle Formation and Moenkopi Formation
Rush Canyon creek	.09	65	Formations of Cretaceous age
Three Lakes Canyon creek	.074	53	Navajo Sandstone
Cave Lakes Canyon creek	.25	180	Do.
Water Canyon creek	.10	72	Do.
Mill Creek	.24	170	Formations of Cretaceous age
Thompson Creek	.23	168	Do.
Kanab Creek main fork	1.8	1,300	Do.
Totals (rounded)	11	8,000 ¹	

¹ About 60 percent of the seepage is from the Navajo Sandstone; about 70 percent is from the main zone of saturation.

Springs

Numerous individual springs and seeps occur throughout the study area, especially in those areas where altitudes exceed 8,000 ft (2,440 m). Most of the springs issue from the main zone of saturation and are dependable perennial sources of water; some issue from perched aquifers and may dry up in late summer or during periods of drought.

Table 12.—Estimated evapotranspiration of ground water

Locality (see pls. 1 and 2)	Area (acres)		Principal phreatophyte	Annual evapotranspiration	
	Total	Adjusted to 100-percent density		Feet	Acre-feet (rounded)
UPPER KANAB CREEK BASIN					
Sink Valley	1,600	1,200	Meadowgrass	1.5	1,800
Johnson Canyon	300	300	Meadowgrass, trees	4	1,200
Hamblin area	350	260	Greasewood	4	1,000
Kanab Creek, Kanab area	440	200	Meadowgrass, saltcedar	4	800
Kanab Creek near Alton	480	360	Meadowgrass, rabbitbrush	2	700
Johnson Lakes and Flood Canyons	20	20	Meadowgrass, saltcedar	4	80
Cottonwood Canyon	50	10	Cottonwood	4	40
Tenney Canyon	40	40	Meadowgrass	1.5	60
Three Lakes Canyon	20	20	Meadowgrass	1.5	30
Totals (rounded)	3,300	2,400	—	—	6,000
UPPER VIRGIN RIVER BASIN					
Virgin River including North and East Forks	2,300	800	Trees ¹ , meadowgrass	4	3,200
Lydias and Stout Canyons	300	300	Meadowgrass, trees	2	600
Gould Wash	40	20	Trees	4	80
Hildale area	20	5	Trees	4	20
Totals (rounded)	2,700	1,100	—	—	4,000

¹ Include cottonwood, willow, and Russian-olive.

Most of the spring discharge is directly into stream channels; the annual amount is included in the foregoing estimate of seepage to streams (as base flow). Some of the spring discharge is also included in the foregoing estimates of evapotranspiration. Spring discharge not included in the estimates of seepage to streams or evapotranspiration totals nearly 3,000 acre-ft (3.2 hm³) per year. This estimate was made by multiplying the estimated total number of individual springs in the area (determined from field reconnaissance, topographic maps, and records of the Utah State Engineer) by the mean

discharge (about 2 gal/min or 0.13 L/s) of the representative springs listed in table 21. The flow of those springs is used chiefly for public supply (table 13), livestock, wildlife, and recreation.

Wells

The largest withdrawals of ground water from wells are for public supply and irrigation. At least 1,100 acre-ft (1.4 hm^3) per year of water was pumped for public supply during 1977 as shown in the following table:

Community	Withdrawal (acre-feet)	
	1976	1977
UPPER KANAB CREEK BASIN		
Kanab	970	860
Fredonia, Ariz.	64	78
State Park	<u>10</u>	<u>10</u>
Subtotals	1,074	948
UPPER VIRGIN RIVER BASIN		
Glendale	72	51
Mount Carmel	4	4
Orderville	68	55
Rockville	7	7
Springdale	<u>4</u>	<u>4</u>
Subtotals	155	121
Totals (rounded)	1,200	1,100

At least 75 percent of this amount was for the city of Kanab (from wells that tap the Navajo Sandstone). Approximately 1,500 acre-ft (1.8 hm^3) of water was withdrawn by irrigation wells in the study area during 1977. This included about 1,000 acre-ft (1.2 hm^3) in the upper Kanab Creek basin (table 14) and at least 470 acre-ft (0.6 hm^3) from the upper Virgin River basin (chiefly along Gould Wash and Short Creek). The estimate for the upper Kanab Creek basin is based on a pumping inventory. Most of the wells inventoried are in Johnson Canyon and tap either the Navajo or unconsolidated rocks. These two geologic units produced 26 and 27 percent, respectively, of the 1977 withdrawal for irrigation. The estimate for the upper Virgin River basin is based only on reconnaissance and probably is conservative.

Withdrawals of ground water by domestic, stock, commercial, and other wells are estimated to total not more than 700 acre-ft (0.9 hm^3) in 1977. The amount was roughly estimated by multiplying the number of such wells known to have existed in the area during 1977 by 25 percent of the average measured pumping rates of those that were inventoried (table 18). This was done under the assumption that all the wells were pumped about 25 percent of the time during the year.

Table 13.—Springflow used for public supply, 1977

Community	Average daily flow (cubic feet per second)	Yearly total (acre-feet, rounded)	Geologic source
UPPER KANAB CREEK BASIN			
Alton	0.022 ¹	16	Wasatch Formation
Fredonia, Ariz.	.31 ⁴	220	Navajo Sandstone
Kanab	.13 ⁴	95	Do.
Totals (rounded)	0.46	330	
UPPER VIRGIN RIVER BASIN			
Orderville	0.13 ¹	95	Sandstone of Cretaceous age
Rockville	.008 ¹	6	Shinarump Member of the Chinle Formation
Springdale	.13 ¹	95	Navajo Sandstone
Virgin	.016 ¹	12	Moenkopi Formation
Zion National Park	.5 ¹	360	Navajo Sandstone
Hildale, Utah, and Colorado City, Ariz ²	.044 ³	32	Navajo Sandstone and Kayenta Formation
Totals (rounded)	0.83	600	

¹ Reported by local or government official.

² Directly across State line from Hildale.

³ Based on one measurement during this investigation.

⁴ Based on several measurements during this investigation.

Subsurface outflow

Some ground water probably discharges from the upper Virgin River basin as subsurface flow westward beneath the Hurricane Cliffs as indicated by Cordova, Sandberg, and McConkie (1972, p. 73). There are insufficient data from which to determine the annual rate, but based on geologic and geophysical data it probably is small.

According to the potentiometric-surface contours on plate 2, ground water leaves the upper Kanab Creek basin as subsurface flow southward beneath the Arizona-Utah State line. Most of this outflow occurs in the Moenkopi Formation, which has a generally low permeability. Some occurs in the relatively higher permeable Shinarump Member of the Chinle Formation and younger rocks, which have somewhat higher permeability than the Moenkopi.

The annual rate of outflow--5,000 acre-ft (6 hm³)--was estimated using a variant of Darcy's law, $Q = TIL$. In this equation, Q is the annual rate of subsurface flow, in acre-feet; T is the transmissivity, estimated to be 160 ft²/d (15 m²/d) based on a hydraulic conductivity of 0.08 ft/d (0.02 m/d)

Table 14.—Estimated discharge from irrigation wells in the upper Kanab Creek basin, 1976-77

Well No.	Discharge, <i>acre-feet</i>		Geologic source
	1976	1977	
(C-40-4½)31bda-1	0	50	Unconsolidated rocks
32bad-1	140	140	Do.
(C-41-4½)6aad-1	60	0	Do.
(C-42-5)11bdb-1	140	140	Unconsolidated rocks and Navajo Sandstone
26ccc-2	54	0	Navajo Sandstone
26cda-2	69	113	Do.
27aaa-1	61	44	Do.
27add-1	26	25	Do.
35-bbb-1	0	163	Do.
(C-43-4½)31ddd-1	10	10	Shinarump Member of the Chinle Formation
32aad-1	2	16	Do.
32cdb-1	.04	.02	Do.
33abb-1	7	9	Do.
33cac-1	16	.5	Shinarump Member of the Chinle Formation and Moenkopi Formation
(C-43-5)2bbd-1	45	73	Navajo Sandstone
25bda-1	0	39	Unconsolidated rocks
25cda-1	0	1.7	Do.
25cdb-1 and 2	0	43	Do.
25cac-1			
36cab-1	100	113	Shinarump Member of the Chinle Formation and Moenkopi Formation
(C-43-6)27dbd-1	1	.3	Unconsolidated rocks and Chinle Formation
(C-44-5)2aba-1	0	13	Shinarump Member of the Chinle Formation
2bad-1	0	9.5	Do.
Totals (rounded)	730	1,000	

(estimated from an aquifer test) and a saturated flow section 2,000 ft (610 m) thick; I is the hydraulic gradient, estimated to be 100 ft/mi (19 m/km) and based on the average of the gradients of the potentiometric surface along lines A-B and C-D in figure 4; and L is the length of section (about 40 mi or 64 km) across which flow is assumed to occur.

Storage

According to table 15, there is an estimated 200 million acre-ft (250,000 hm³) of recoverable water in the Navajo Sandstone where it underlies the study area. This is the amount of water that can drain by gravity from the formation without additional recharge. It is essentially the maximum volume of water that can be withdrawn from the Navajo within the study area by

Table 15.—Estimated amount of recoverable water in the Navajo Sandstone

Areal extent of aquifer: Determined from plate 3.

Estimated average saturated thickness: Roughly estimated for the upper Kanab Creek basin from approximated total thickness of formation and depth-to-water data at a few sites; for the upper Virgin River basin assumed to be the same as in the upper Kanab Creek basin because of sparsity of data.

Effective porosity: Values estimated from data in the central Virgin River basin (Cordova, 1978) to be 50 percent of the average total porosity of 30 percent (tables 6 and 7); values for upper Virgin River basin assumed to be the same as for the upper Kanab Creek basin.

Volume of recoverable water in aquifer: Product of areal extent, thickness, and effective porosity.

Area	Areal extent of aquifer (thousands of acres)		Estimated average saturated thickness (feet)		Effective porosity	Volume of recoverable water in aquifer (acre-feet, rounded)		
	Outcropping	Buried	Outcropping	Buried		Where outcropping	Where buried	Total
Upper Virgin River basin	190	380	300	2,000	0.15	9×10^6	1×10^8	1×10^8
Upper Kanab Creek basin	180	240	300	2,000	.15	8×10^6	7×10^7	8×10^7
Total (rounded)	370	620	—	—	—	17×10^6	2×10^8	2×10^8

wells if natural recharge to and discharge from the formation were to cease. Large-scale development of this supply, however, would be subject to various legal, economic, and environmental constraints.

Estimates were not made of the volume of recoverable water in other geologic units that underlie the study area. Recoverable water in the other consolidated rocks, with their large areal extent and thick saturated sections, is probably also in the millions of acre-feet. The unconsolidated rocks even though they have a higher storage capacity per unit volume probably contain only a fraction of the recoverable water in the consolidated rock. This is because of the limited extent and saturated thickness of the unconsolidated rocks.

Changes in ground-water storage are reflected by fluctuations of water levels in wells (table 19 and figs. 10 and 11). Rising water levels generally indicate increases in storage, whereas declining water levels generally indicate decreases in storage. The hydrographs shown in figure 10 represent the available long-term water-level records in the study area. A comparison of these hydrographs with cumulative-departure curves of precipitation (fig. 3) shows two main relations. First, water levels have generally been responding to above- and below-normal precipitation since the beginning of the water-level record. Second, the overall decline in water levels in part of the 1970's is a result of below-normal precipitation. It may, however, also be due in part to local increases in ground-water withdrawals during the same period.




Figure 10.— Water-level fluctuations in selected wells in the study area.




Figure 11.— Water-level fluctuations (1976-78) in selected wells in the upper Kanab Creek basin.

Reduction of ground water in storage by pumping wells is indicated by water-level records of wells in two localities in the upper Kanab Creek basin. The large water-level declines following 1970 in wells (C-43-5)25acd-1 and 25dbb-1 reflect local decreases in stored water, resulting largely from large withdrawals at each of these wells. In these areas, recharge has not been sufficient to return the water levels to their pre-pumping altitudes. Recharge could only come from precipitation which was generally below normal

during and after pumping periods. Pumping terminated in 1972 after a short period of heavy pumping so that the continued general decline of water levels in these two wells is attributed to continued below-normal precipitation.

Comparison of the March 16, 1962, and February 27, 1977 (pre-pumping season), water levels in well (C-42-6)19bdc-1 (table 19) shows a decline of about 30 ft (9 m). This well and a nearby newer well, (C-42-6)19bdc-2, are the most heavily pumped of all the wells used by the city of Kanab. Increased usage probably would result in greater withdrawals from storage, especially during periods of below-normal precipitation that are probably accompanied by little or no recharge.

Chemical quality

General characteristics

Chemical analyses of ground water in the upper Virgin River and Kanab Creek basins are shown in table 23. Important factors affecting the chemical quality are the availability of soluble substances in the rocks through which the water moves and the length of time the water is in contact with these soluble substances. Among consolidated-rock aquifers in the study area, limestone and shale contain the largest amounts of soluble substances; whereas, sandstone and basalt contain the smallest amounts. In the unconsolidated-rock aquifers, the amounts of soluble substances depend partly on the sources of the materials comprising the aquifers and partly on the nature of the underlying consolidated rocks.

Dissolved-solids concentration in water is related to specific conductance, which is a measure of the ability of the water to conduct an electrical current. This relation for ground water in the study area is shown in figure 12 based on selected chemical analyses in table 23. The average ratio of dissolved-solids concentration to specific conductance is 0.65. Therefore, if a field determination of specific conductance is made of a water sample, that value multiplied by 0.65 will give the approximate dissolved-solids concentration of the water.

The dissolved-solids concentration in the ground water of the study area differs considerably according to locality and aquifer, as shown in tables 16 and 23. The areas most likely to yield water containing less than 1,000 mg/L of dissolved solids are generally north of the Vermilion Cliffs. The Wasatch Formation and the Navajo Sandstone are the aquifers most likely to yield water with a dissolved-solids concentration of less than 500 mg/L (table 16). This is also true of such sandstone strata as the Wahweap Sandstone and Kaiparowits Formation where they crop out in or near major recharge areas. Shale, such as the Tropic Shale and Carmel and Moenkopi Formations commonly yield water containing several thousand milligrams per liter of dissolved solids. A known local exception (and others probably also exist in the study area) is the Shinarump Member of the Chinle Formation. A sample from spring (C-43-4)31aad-S1, which discharges from the Shinarump had only 94 mg/L of dissolved-solids, compared to the average concentration of 900 mg/L in 15 samples from that formation. The small dissolved-solids concentration indicates that the spring is near a local recharge area and the water has been in the rocks only a relatively short time.




Figure 12.— Relation of dissolved-solids concentration to specific conductance of ground water in the study area.

The Navajo Sandstone consisting largely of silica sand of low solubility consistently yields water low in dissolved-solids concentration. Of 41 water samples collected from the Navajo, dissolved-solids concentrations ranged from only 74 to 905 mg/L and averaged about 270 mg/L (table 16). About 80 percent of the samples had dissolved-solids concentrations of less than 300 mg/L. The highest value of 905 mg/L--in a sample collected at well (C-40-5)16cdc-1--may be attributed to mixing in the well of the Navajo water with more saline water from the overlying Carmel Formation. Some of the sampled springs that issue

Table 16.—Summary of dissolved-solids concentration, in milligrams per liter, in ground water by aquifer


Geologic source	Number of samples	Dissolved-solids concentration	
		Range	Average (rounded)
Unconsolidated rocks	14	31-3,150	890
Basalt	1	266	—
Wasatch Formation	2	288-308	300
Rocks of Cretaceous age, undivided	11	225-2,320	760
Rocks of Jurassic age, undivided (above the Navajo Sandstone)	7	900-3,100	2,000
Navajo Sandstone	41	74-905	270
Shinarump Member of the Chinle Formation	15	94-3,470	900
Rocks of Triassic age, undivided, below the Navajo Sandstone (excluding the Shinarump Member of the Chinle Formation)	8	266-9,490	1,740
Kaibab Limestone ¹	1	9,390	—

¹ Thermal water from the La Verkin Hot Springs and probably not typical of ground water from the formation.


from the Navajo also had higher-than-expected dissolved-solids concentrations. The samples were collected from spring ponds where the water may have been concentrated by evaporation or contaminated prior to sampling.

Ground water can be classified into chemical types by Stiff diagrams (Stiff, 1951) as shown in figure 13. This classification is useful in determining the geologic source or sources of the water. In the study area, there are two basically dominant types of ground water. One is the bicarbonate type, in which the principal anion is bicarbonate and the principal cation is calcium, magnesium, or sodium. The other is the sulfate type, in which the principal anion is sulfate and the principal cation is calcium, magnesium, or sodium.


The Navajo Sandstone typically contains water in which calcium is the dominant cation and bicarbonate is the dominant anion. Locally, however, it has water in which sodium is the dominant cation and sulfate is the dominant anion. This probably is due to mixing with water from the overlying Carmel Formation (which commonly contains gypsum).




Source: Well (C-38-6)22dbc-1
Aquifer: Wasatch Formation




Source: Well (C-40-5)16cdc-1
Aquifer: Navajo Sandstone




Source: Spring (C-39-4 $\frac{1}{2}$)35dab-S1
Aquifer: Tropic Shale



Source: Spring (C-40-7)14bad-S1
Aquifer: Unconsolidated rocks



Source: Mill Creek (base flow) at site
(C-40-4 $\frac{1}{2}$)6add
Aquifer: Cretaceous rocks, undifferentiated




Source: Well (C-41-5)5aaa-1
Aquifer: Carmel Formation


Figure 13.— Common chemical types of water from various aquifers in the

The Wasatch Formation and formations of Cretaceous age commonly contain water in which calcium or magnesium are the dominant cations and bicarbonate is the dominant anion. However, the shaly or coal-bearing formations of Cretaceous age, like the Tropic Shale, contain water in which magnesium and sulfate are the dominant ions.


The Shinarump Member of the Chinle Formation and the unconsolidated rocks may contain water high in either sulfate or bicarbonate. The unconsolidated rocks commonly contain water that is similar to the underlying consolidated rocks. For example, where the Chinle and other rock units underlie unconsolidated rocks, the latter commonly contain water in which sulfate is the dominant anion.




Source: Well (C-42-5)26cda-2
Aquifer: Navajo Sandstone




Source: Well (C-43-5)36acd-1
Aquifer: Unconsolidated rocks



Source: Well (C-42-10)7bdd-1
Aquifer: Shinarump Member of Chinle Formation



Source: Well (C-43-5)36ccc-1
Aquifer: Shinarump Member of Chinle Formation




Source: Well (C-43-5)34abd-1
Aquifer: Chinle Formation

EXPLANATION

Na + K, sodium plus potassium
Ca, calcium
Mg, magnesium
Cl, chloride
SO₄, sulfate
HCO₃ + CO₃, bicarbonate plus carbonate
Units are in milliequivalents per liter


study area. (Diagrams after a method devised by Stiff, 1951, p. 15-17.)

Changes in chemical quality of ground water percolating through various rock types can be determined from chemical analyses of base flow of streams. Such changes are shown graphically in figure 14 by Stiff diagrams of chemical analyses of base-flow samples (table 23) collected at various sites along Johnson Canyon creek. At the upstream site, the base flow was mainly from the Navajo Sandstone, and the dominant ions were calcium and bicarbonate. At the central site, the base flow was from the unconsolidated rocks and the Moenave and Chinle Formations; here the dominant ions were magnesium and bicarbonate, but sulfate had increased compared to the upstream site. At the downstream site, base flow was from the Shinarump Member of the Chinle Formation and the Moenkopi Formation; the dominant ions were sodium, magnesium, and sulfate. The downstream increase of sodium, magnesium, and sulfate is an indication of increasing amounts of these ions in water that seeps from aquifers crossed by the stream.




Site No.: (C-43-4½)18ccc
Date of sample: 10-12-76
Aquifer: Navajo Sandstone

Upper stream reach



Site No.: (C-43-4½)30ccc
Date of sample: 10-12-76
Aquifer: Unconsolidated rocks, Moenave
and Chinle Formations

Middle stream reach



Site No.: (C-44-5)11adc
Date of sample: 10-13-76
Aquifer: Shinarump Member of Chinle
Formation and Moenkopi Formation

Lower stream reach

EXPLANATION

Na + K, sodium plus potassium
Ca, calcium
Mg, magnesium
Cl, chloride
SO₄, sulfate
HCO₃ + CO₃, bicarbonate plus carbonate
Units are in milliequivalents per liter

Figure 14.— Changes in chemical quality of base flow in Johnson Canyon creek.
(Diagrams after a method devised by Stiff, 1951, p. 15-17.)

Relation to use

Public supply.--The U.S. Public Health Service (1962, p.7) has recommended quality standards for public drinking water and water-supply systems. A partial list of these standards is as follows:

Constituent	Recommended maximum limit (milligrams per liter)
Dissolved solids	500
Sulfate	250
Chloride	250
Nitrate	45 ¹

¹The limit is 10 mg/L for total nitrogen (N).

The analyses in table 23 indicate that some of the ground water from most aquifers is likely to have dissolved-solids and sulfate concentrations that exceed the recommended maximum limits. This is particularly true for aquifers older than the Navajo Sandstone and for the unconsolidated rocks. The concentrations of chloride and nitrate are generally lower than the respective maximum recommended limits.

The maximum recommended limit for chloride was only exceeded in a few cases. Most of the ground water analyzed had chloride concentrations that were significantly less than 100 mg/L. The ground water that contained more than 100 mg/L was from the Chinle and older formations or from unconsolidated rocks overlying these formations. The highest concentrations of chloride were 3,610 mg/L in water from La Verkin Hot Springs, which rises from the Kaibab Limestone, and 1,000 mg/L in water from well (C-43-5)36ccc-1, which taps the Moenkopi Formation.

Table 23 shows concentrations of nitrite (NO₂) plus nitrate (NO₃) determined as nitrogen (N), in which case the maximum recommended limit for drinking water is 10 mg/L. As shown in table 23 that limit was exceeded in only two of the samples analyzed. Concentrations in most of the waters analyzed were less than 3 mg/L, and in many, less than 2 mg/L. Waters containing more than 3 mg/L of nitrogen may have been in contact with organic waste, such as might be found in pastures in recharge areas.

Irrigation supply.--Ground water in the study area is classified in figure 18 according to salinity and sodium hazard, using the method of the U.S. Salinity Laboratory Staff (1954, p. 69). In classifying water for irrigation by this method, it is assumed that an average quantity of water will be used under average conditions of soil texture, salt tolerance of crops, climate, drainage, and infiltration. The classification in figure 15 is based on the relation between sodium-adsorption ratio (SAR) and specific conductance of the water. The SAR is a measure of the sodium hazard, and the specific conductance is a measure of the salinity hazard. Using the diagram, water can be classified into 16 categories according to the degree that it may cause salinity problems and undesirable ion-exchange effects. The higher the salinity or sodium hazards the less suitable the water is for irrigation.




Figure 15.— Classification for irrigation of selected ground-water samples from the study area. (Classification after a method of the U.S. Salinity Laboratory Staff, 1954.)

Ground water in the study area is shown in figure 15 to have a salinity hazard that ranges from low to very high. The sodium hazard of the water also ranges from low to very high but is mostly low. The reader interested in the sodium and salinity hazards of any of the water sources for which analyses are given in table 23 may determine those hazards by plotting in figure 15 the respective specific conductance and SAR values given in table 23.

High boron concentrations in irrigation water may also present a problem because of the toxicity of boron to some types of plants. Table 17 shows a classification of irrigation water based on boron content. The quantity of boron in solution in ground-water samples from the study area ranged from 0 to 5,000 $\mu\text{g/L}$, but most samples contained less than 500 $\mu\text{g/L}$ (table 23). The water that contained boron in excess of 500 $\mu\text{g/L}$ was mainly from the Chinle Formation and other rocks. The largest value of 5,000 $\mu\text{g/L}$ was in water from La Verkin Hot Springs, which rise from the Kaibab Limestone.

Temperature

The temperature of ground water in the upper Virgin River and Kanab Creek basins (table 23) ranges from 7.0°C (45°F) to 37.5°C (100°F), but most of the ground water has a temperature in the range of 11.0°C (52°F) to 16.0°C (61°F). Figure 16 shows that in the study area, ground-water temperature is generally related to the altitude of the potentiometric surface, which is a reflection of distance from principal recharge areas. The best-fit line through the data points indicates a gradient of about 2.5°C (6°F) decrease of temperature for each 1,000 ft (305 m) of increase in altitude. Extrapolating the gradient to lower altitudes indicates that ground-water temperatures at the altitude of 3,000 ft (914 m) are most likely less than 20.0°C (68°F). The measured temperature of La Verkin Hot Springs is about 17.5°C (64°F) hotter than the expected temperature, suggesting deep circulation of the spring water in the Hurricane Fault. (See Milligan and others, 1966, p. 42.)

The temperature gradient below the potentiometric surface is an important consideration in the development of the ground-water resources by wells. Temperature-gradient data are available from several wells in the upper Kanab Creek basin and are given below:

Well No.	Temperature gradient
(C-40-5)16cdc-1	1°C/180 ft
(C-41-5)5aaa-1	1°C/110 ft
(C-42-6)19baa-1	1°C/210 ft
(C-43-5)36ccc-1	1°C/150 ft
(C-44-6)5ddd-1	1°C/230 ft

The average gradient, or increase of temperature with depth, is about 1°C per 180 ft (55 m). This gradient is relatively low. Some meteoric water probably circulates to moderate depths along some faults. This is indicated by higher temperature gradients at well (C-41-5)5aaa-1, which is adjacent to the inferred fault in Kanab Creek canyon and at well (C-43-5)36ccc-1, which is adjacent to the inferred fault in Johnson Canyon (pl. 3).

Table 17.—Classification of irrigation water based on the boron content

(Modified from Scofield and Wilcox, 1931, p. 9-10)

Sensitive crops: Include most deciduous fruit and nut trees.

Semitolerant crops: Include most small grains, potatoes, and some other vegetables.

Tolerant crops: Include alfalfa and most root vegetables.

(For a more complete listing of crop tolerances, see U.S. Salinity Laboratory Staff, 1954, p. 67.)

Class of water	Sensitive crops (µg/L)	Semitolerant crops (µg/L)	Tolerant crops (µg/L)
Excellent	Less than 330	Less than 670	Less than 1,000
Good	330-670	670-1,330	1,000-2,000
Permissible	670-1,000	1,330-2,000	2,000-3,000
Doubtful	1,000-1,250	2,000-2,500	3,000-3,750
Unsuitable	More than 1,250	More than 2,500	More than 3,750

POSSIBLE HYDROLOGIC EFFECTS OF INCREASED GROUND-WATER DEVELOPMENT

Hydrologic effects that can occur by increased ground-water development in the study area include (1) interference with existing wells, (2) a shift of the natural ground-water drainage divide, (3) reduction of spring and stream discharge, and (4) possible changes in the chemical quality of water.

Interference with existing wells

Withdrawal of ground water from a well results in a cone of depression in the water table or the potentiometric surface. This cone will continue to deepen and expand until a new balance is reached between the rate that water is recharged to or discharged from the aquifer. If withdrawal from the well is then increased, the cone of depression will again begin to deepen and expand.

When an expanding cone of depression reaches an existing well, the water level in that well will be lowered. The yield of the well might also be lowered if that drawdown is a significant part of the saturated thickness of the aquifer at the well. Interference between discharging wells has been observed in several parts of the study area, including Johnson Canyon and Kanab Creek canyon, the Vermilion Terrace, and Gould Wash.

During aquifer tests in Johnson Canyon, all pumped wells tapped the Navajo Sandstone as did most of the observation wells. When well (C-42-5)27add-1 was pumped, 3.74 ft (1.14 m) of drawdown was measured in observation well (C-42-5)27add-2 100 ft (30 m) to the south. When well (C-42-5)35bbb-1




Figure 16.— Relation of ground-water temperature to the altitude of the potentiometric surface.

was pumped, 255 ft (78 m) of drawdown was measured in observation well (C-42-5)26ccc-2 540 ft (165 m) to the north. The effects of pumping irrigation well (C-42-5)35bbb-1 on well (C-42-5)26ccc-2 are shown in figure 11. Water levels also fluctuated in wells (C-42-5)26ccc-1 and 35bdc-3 in response to the pumping of well (C-42-5)35bbb-1 during the 1977 irrigation season.

Two aquifer tests in Johnson Canyon showed interference between deep and shallow wells in the same aquifer and between wells in superposed aquifers. For example, when well (C-42-5)11bdb-1 in the Navajo Sandstone was pumped, a drawdown of about 0.2 ft (0.06 m) was measured in observation well (C-42-5)11bab-1, which taps the overlying unconsolidated deposits 1,500 ft (460 m) to the north. This test showed that pumping effects cannot be obviated entirely by constructing wells in the Navajo where it is overlain by another aquifer because interaquifer hydraulic connection must be considered as a distinct possibility.

Furthermore, in an area of relatively shallow wells, interference cannot necessarily be obviated entirely by drilling deep wells in the same aquifer because of possible hydraulic connection between lower and upper parts of the aquifer. For example, when well (C-42-5)26cda-2 was pumped, a drawdown of about 9 ft (2.7 m) occurred in observation well (C-42-5)26cda-1 about 8 ft (2.4 m) to the southeast. The observation well is only 26.5 ft (8.1 m) deep, whereas the pumped well is 380 ft (116 m) deep. Pumping a deep well would, however, produce less drawdown in a well that taps the same aquifer at a shallower depth than in one that taps the aquifer at the same depth. Similarly, pumping a shallow well would produce less drawdown in deep wells than in other shallow wells that tap the same aquifer.

Well interference was also observed in several parts of Kanab Creek canyon. Pumping well (C-42-6)19bdc-2 caused a water-level decline of 4.2 ft (1.3 m) in well (C-42-6)19bdc-1 500 ft (150 m) to the east. It also produced a slight but measurable decline in well (C-42-6)19baa-1 about 2,000 ft (610 m) to the north. The overall decline of water level in well (C-42-6)19baa-1 (fig. 11) is possibly the net result of both interference and below-normal precipitation. Also the sharp fluctuations of water level are probably due to fluctuations of barometric pressure rather than interference by wells (C-42-6)19bdc-1 and 19bdc-2.

On the Vermilion Terrace, interference was shown by an aquifer test in the Shinarump Member of the Chinle Formation and by existing water-level records. Pumping well (C-44-5)2bad-2 caused the water level in well (C-44-5)2bad-1, 360 ft (110 m) to the southwest, to decline 0.54 ft (0.16 m). Pumping of irrigation well (C-43-5)36cab-1 probably caused the approximately 1 ft (0.30 m) water-level decline in well (C-43-5)36ccc-1 (fig. 11), which is about 2,500 ft (760 m) to the southwest.

In summary, the pumping of a well anywhere in the Navajo Sandstone in the Kanab Creek basin probably would cause some decline of water levels elsewhere in the aquifer and probably also in overlying and underlying aquifers in the basin. Although data are not available for the upper Virgin River basin, pumping of wells in the Navajo would probably produce the same interference effects. Furthermore, pumping of wells in any aquifer in the study area can be expected to cause declines of water levels to some degree in

other nearby wells in that aquifer and in overlying and underlying aquifers. The extent of decline, however, would depend on hydraulic properties of the aquifers, distances from the pumped wells, depths of the respective wells, the pumping rate, and the length of time the well is pumped.

The amount of drawdown in a well in the Navajo Sandstone in the Kanab Creek basin caused by pumping another well may be computed from the aquifer coefficients of transmissivity and storage. Drawdowns at distances of 100 ft (30 m) and greater from a pumped well may be determined using the sets of distance-drawdown curves in figure 17. The curves are based on the assumptions that the aquifer is homogeneous, isotropic, infinite in areal extent, and constant in permeability and thickness. Few, if any, aquifers satisfy these assumptions, and those in the study area are no exception. The distance-drawdown curves nevertheless do provide an insight to the order-of-magnitude interference effects under given rates of pumping.

The upper family of curves in figure 17 were computed using the average aquifer coefficients determined for the Navajo Sandstone by aquifer testing. These curves are probably most useful in the area where the Navajo crops out, or where it is not covered by a significant thickness of younger formations. The curves show that if a well were pumped at 1,000 gal/min (63 L/s), the water level in a well 1,000 ft (300 m) away would be lowered about 11.5 ft (3.5 m) in 10 days. If pumping were continued for 10,000 days, the lowering would be about 28 ft (8.5 m), assuming no induced recharge or increased discharge. The greater the distance between wells, the less the water-level decline. Declines for pumping rates other than 1,000 gal/min (63 L/s) can be computed by determining the drawdown for 1,000 gal/min and then increasing or decreasing the decline by the proportionate difference between the two pumping rates. For example, if the pumping rate were 5,000 gal/min (310 L/s), the decline would be 5×11.5 ft or about 58 ft (18 m) after 10 days of pumping.

The Navajo Sandstone underlying the Alton and Bald Knoll areas probably has a coefficient of storage that is smaller than the average of 2×10^{-3} used to construct the upper family of curves in figure 17. The value is not known but may be on the order of 1×10^{-5} . This smaller value is probable because the aquifer is buried under a thick section of younger rocks and is therefore subjected to higher external pressures than in the area of outcrop. These higher pressures increase the rigidity of the aquifer and therefore decrease the coefficient of storage. The lower family of curves in figure 17 was computed using the average transmissivity for the Navajo but the coefficient of storage was 1×10^{-5} . A comparison of these curves with the upper family of curves shows that the smaller coefficient of storage increases the rate of expansion of the cone of depression. For example, using the upper family of curves, a well pumping 1,000 gal/min (63 L/s) in the Bald Knoll area would cause a drawdown of 18.5 ft (5.6 m) at a distance of 10,000 ft (3,050 m) after 20,000 days of pumping; by comparison, using the lower family of curves, the same pumping rate of the same well would cause a drawdown of about 32 ft (9.8 m) at the same distance and after the same period of pumping. Based on the presumed leaky nature of the aquifer system as discussed above, however, these rates would probably not prevail for a long pumping period and drawdowns would probably, therefore, be very much less. In order to be better prepared to predict the effects of pumping in the Alton and Bald Knoll areas, however, an aquifer test is needed in the Navajo to more accurately evaluate the coefficient of storage.

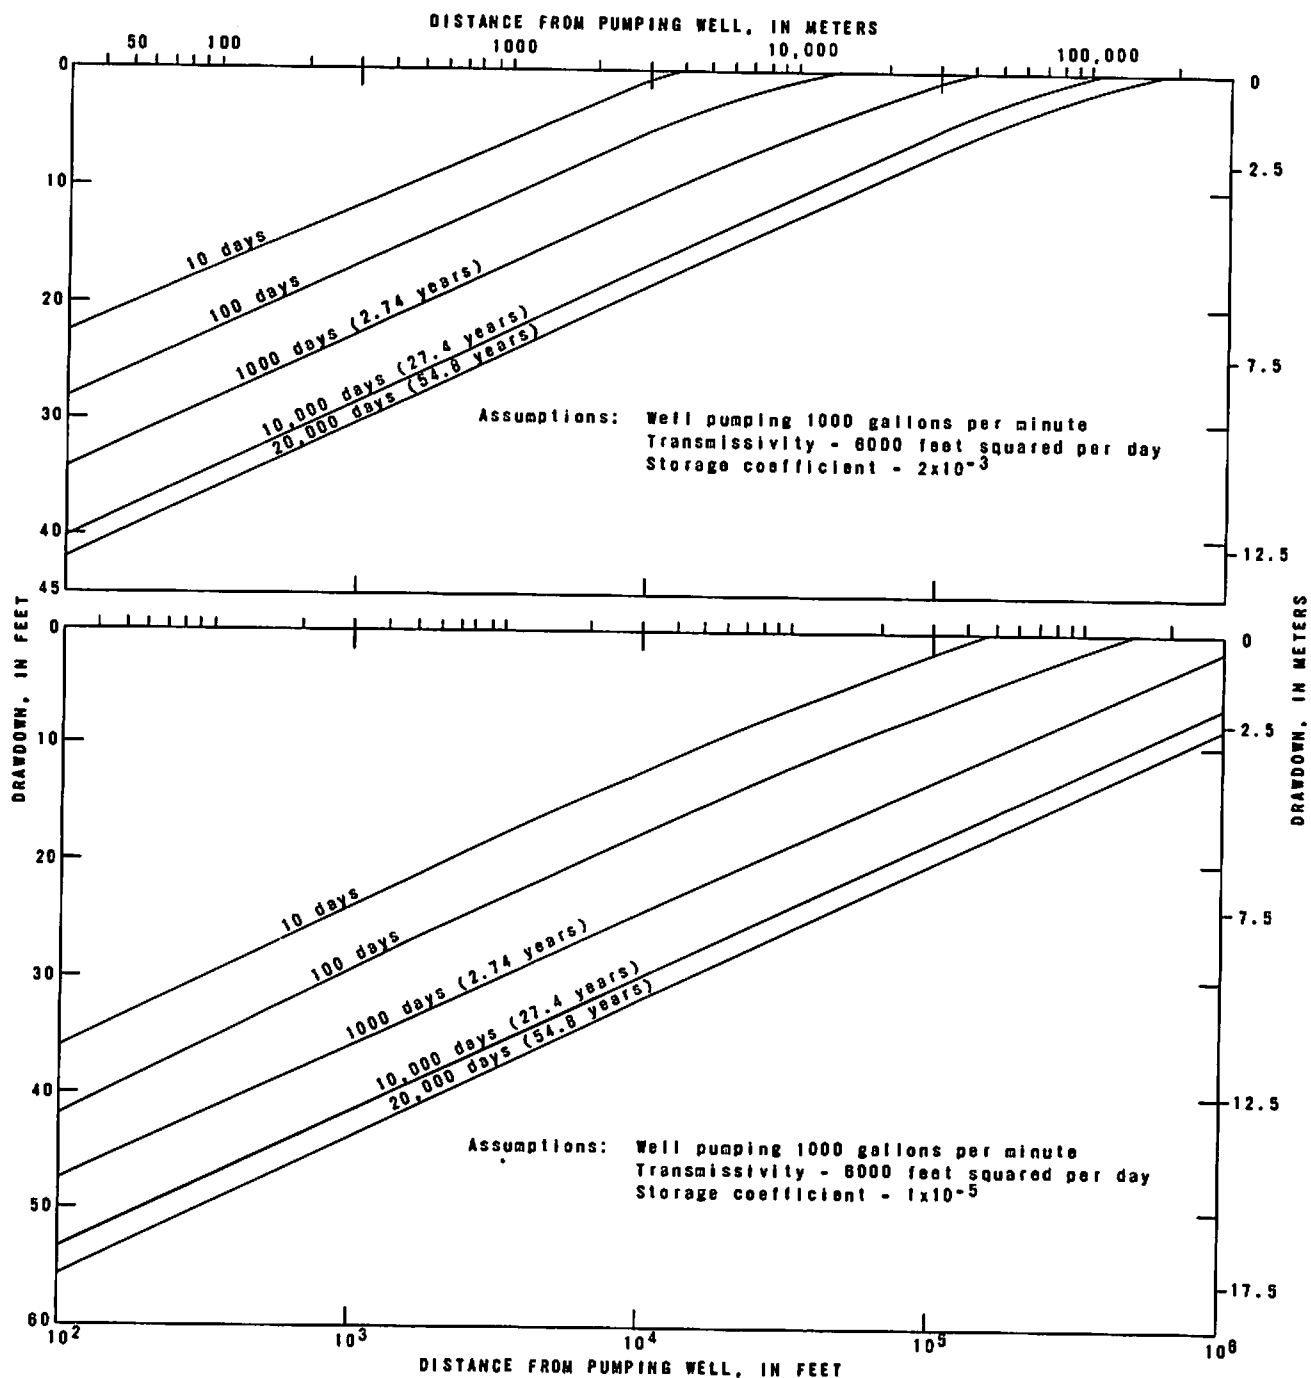


Figure 17.—Theoretical relation between drawdown and distance from a pumping well in the Navajo Sandstone for selected pumping durations.

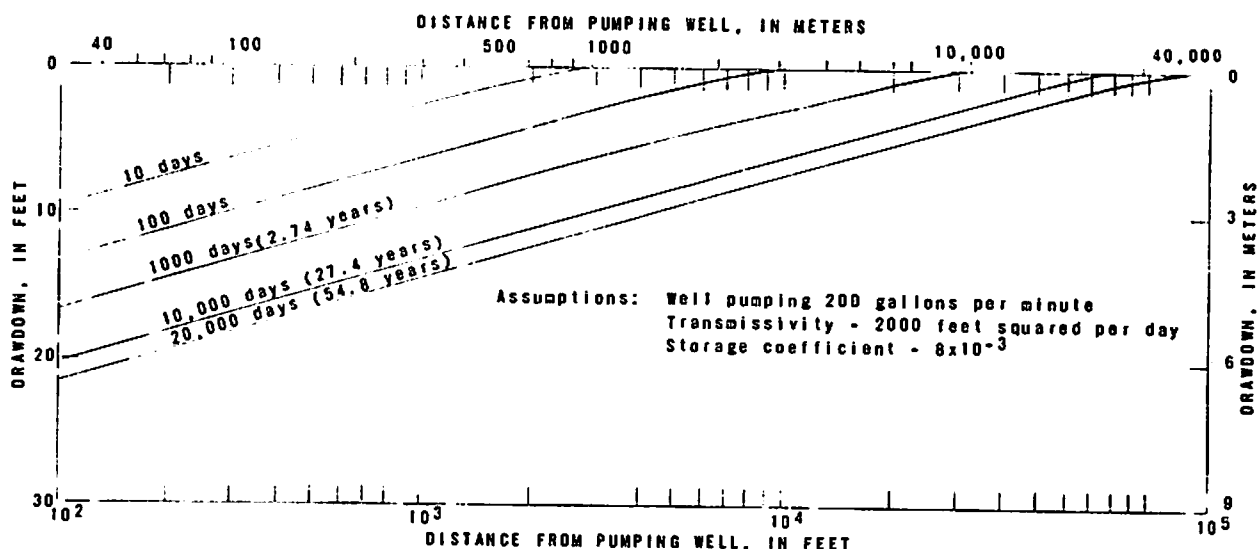


Figure 18.—Theoretical relation between drawdown and distance from a pumping well tapping mainly the Shinarump Member of the Chinle Formation for selected pumping durations.

Figure 18 shows theoretical distance-drawdown curves computed using the aquifer coefficients determined for localities where the Shinarump Member of the Chinle Formation is the only known or the main aquifer developed by wells. The pumping rate used is probably average for large-discharge wells in the aquifer.

Shift of the ground-water divide

Wells constructed in the Alton or Bald Knoll areas would be within 16 mi (25.7 km) of the topographic divide between Kanab Creek and the Sevier and Paria Rivers. As noted earlier, the ground-water divide is assumed to be coincident with the topographic divide in the area. Should the cone of depression of a discharging well in the Alton-Bald Knoll area expand to the ground-water divide, the result would be an increased ground-water gradient between the well and the divide. This would increase the amount of water flowing toward the well. The cone of depression could continue to expand beyond the divide and thus shift it into an adjoining drainage basin.

The amount of potential lateral shift of the ground-water divide induced by pumping is not known, but the amount of drawdown can be estimated at the divide by referring to figure 17. Assume a well tapping the Navajo Sandstone in the Bald Knoll locale pumps for 40 years (about 15,000 days) at the rate of 4,000 gal/min (250 L/s). The potentiometric surface could be lowered about 100 ft (30 m) at a ground-water divide 6 mi (9.7 km) away, assuming a nonleaky system, which is unlikely. Therefore, such a decline would be an extreme case.

The actual drawdowns in the ground-water reservoir may be greater or less than those determined from figure 17. Boundary conditions are among the most important factors controlling the magnitude of drawdown. A boundary may be the natural finite extent of the aquifer, impermeable fault zones in the

aquifer, or an area of natural discharge such as a spring or gaining stream reach. Faults are fairly common in the study area and some are probably impermeable so that fault-induced image effects may be expected to occur in some localities sooner than the effects resulting from the cone of depression meeting the boundaries of the aquifer. The proximity of faults and the southern limit of the Navajo Sandstone in the areas of Johnson Canyon and Kanab Creek suggest that drawdowns could eventually be affected by these boundaries. When the cone of depression intercepts an area of natural discharge, the actual drawdown will be less than the theoretical drawdown because the water from these natural sources is diverted to the discharging well. The springs and streams in Johnson Canyon and Kanab Creek canyon are natural-discharge boundaries, which would eventually be intercepted by the expanding cones of depression of wells in these canyons.

Reduction of streamflow

Discharge from a well can affect streamflow where there is hydraulic connection between a stream and the aquifer from which a discharging well is withdrawing water. Where an aquifer is hydraulically connected to a stream channel, wells discharging water from the aquifer may divert streamflow or water that would otherwise discharge into the stream channel as springs or seeps. The percentage of water discharged by a well which is diverted from a stream can be roughly estimated from a graph prepared by Theis and Conover (1963, fig. 30).

In the study area, hydraulic connection between aquifers and streams apparently exists in (1) the valleys of Thompson and Mill Creeks, (2) the valley of Skutumpah Creek to its junction with Red Wash, (3) Johnson Canyon from sec. 22, T. 42 S., R. 5 W., to the Utah-Arizona State line, (4) Johnson Lakes canyon in sec. 32, T. 42 S., R. 4½ W., (5) the valley of Kanab Creek in the reach above Alton and in the reach from sec. 4, T. 42 S., R. 6 W., to the State line, and (6) the valleys of the North and East Forks of the Virgin River and of the main stem of the Virgin River to the Hurricane Cliffs. For all these streams, base flow comprises a significant part of the total annual flow.

Based on available data, most of the base flow in the lower reaches of Kanab and Johnson Canyon Creeks comes from the Navajo Sandstone; consequently, increased withdrawals of water by wells in the Navajo would, in time, measurably reduce the flow of those streams. This effect has been observed locally in Johnson Canyon where well (D-43-5)25aaa-1 taps the Navajo near Johnson Canyon creek. Pumping of that well measurably decreases the flow of springs that discharge from the Navajo to the creek about 300 ft (91 m) upstream.

Effects on chemical quality of water

The present (1978) level of ground-water development has had minimal effects on the chemical quality of ground and surface water in the upper Virgin River and Kanab Creek basins. Increased withdrawals from the Navajo Sandstone could affect the chemical quality of water in that aquifer and in nearby streams.

As noted, dissolved-solids concentrations of water in the Navajo Sandstone are relatively low, averaging less than 300 mg/L where sampled. Dissolved-solids concentrations in water in both the overlying and underlying formations are generally high, commonly exceeding 1,000 mg/L. Increased withdrawals from the Navajo by wells could eventually create a large enough hydraulic gradient towards the pumped area to induce movement of the more highly mineralized water from the overlying and underlying rocks into the Navajo, thus deteriorating the chemical quality of water in the Navajo. Similar events have occurred in several of the more heavily developed valley-fill aquifers in western Utah (Handy and others, 1969), and it is possible that it could also occur in the consolidated-rock aquifers in the study area.

Increased withdrawals of water from the Navajo Sandstone also would affect the chemical quality of streamflow, especially in Johnson Canyon and Kanab Creeks. As noted above, most of the base flow in the lower reaches of those streams comes from the Navajo. Some of the more highly mineralized base flow comes from the older and younger rocks, including the Carmel, Moenkopi, and Chinle Formations. As an increasing amount of water is pumped from wells in the Navajo (and thus diverted from the streams), the ratio of fresher Navajo water and more mineralized water from the older and younger formations in those streams will decrease. This will result in a net increase in the dissolved-solids concentration of the streams. However, it would not increase the total salt load that those streams transport to the Colorado River. Return of the pumped water as from municipal and industrial uses and irrigated land probably would be more mineralized and would therefore increase the salt load transported by Johnson Canyon and Kanab Creeks to the Colorado River. The added salt load cannot be estimated from available data, but it would probably be small compared to the average annual salt load (nearly 9 million tons) carried by the Colorado River through Grand Canyon. (See U.S. Department of the Interior, 1979b, p. 80.)

SUMMARY AND CONCLUSIONS

Both unconsolidated and consolidated rocks contain productive aquifers in the upper Virgin River and Kanab Creek basins. Aquifers in unconsolidated older stream-channel deposits in Johnson Canyon creek and Kanab Creek probably have the greatest potential for increased development by wells. The Navajo Sandstone is the most important consolidated-rock aquifer in the study area. The Navajo is the thickest, has the largest area of outcrop, and supports more large-discharge wells than any other consolidated-rock aquifer. Other principal consolidated-rock aquifers are the Wasatch Formation, the sandstone formations of Cretaceous age, and the Shinarump Member of the Chinle Formation.

The long-term average amount of ground-water recharge to the study area is estimated to be about 80,000 acre-ft (100 hm^3), broken down according to drainage basin as follows: upper Virgin River, 55,000 acre-ft (68 hm^3), and Kanab Creek, 25,000 acre-ft (31 hm^3). The direction of ground-water movement is from the major areas of recharge in the northern highlands generally southward to the major areas of discharge in the lower valleys of the larger streams. The amount of discharge in 1977 in the study area was estimated to be at least 71,000 acre-ft (88 hm^3) broken down by drainage basin as follows: upper Virgin River, 49,000 acre-ft (60 hm^3), and Kanab Creek, 22,000 acre-ft (27 hm^3).

The amount of recoverable ground water in the Navajo Sandstone is estimated to be 200 million acre-ft (250,000 hm³). Reduction of ground water in storage is indicated by water-level records of wells in two localities in the upper Kanab Creek basin.

The dissolved-solids concentration of the ground water in the study area differs considerably according to locality and aquifer. The aquifers most likely to yield water with dissolved-solids concentrations of less than 500 mg/L are the Wasatch Formation and the Navajo Sandstone. Ground water from most other aquifers is likely to have dissolved-solids and sulfate concentrations that exceed the recommended maximum limits of the U.S. Public Health Service for public drinking water. This is particularly true for aquifers older than the Navajo and for aquifers in the unconsolidated rocks. The concentrations of chloride and nitrate, however, generally are significantly lower than the respective recommended limits.

Regarding suitability for irrigation, ground water in the study area has a salinity hazard that ranges from low to very high. The sodium hazard of the water also ranges from low to very high but is mostly low. Generally values of SAR that exceed 3.0 are of ground water from formations older than the Navajo. The quantity of boron in solution in sampled ground water ranged from 0 to 5,000 µg/L, but most waters sampled contained less than 500 µg/L. Waters that contained boron in excess of 500 µg/L were also mainly from formations older than the Navajo.

Most ground water has a temperature in the range of 11.0° to 16.0°C (52° to 61°F). The average gradient, or increase of temperature with depth, is about 1°C per 180 ft. This gradient is relatively low.

Possible hydrologic effects of increased ground-water development in the study area include increased interference between wells, change in the ground-water divide between the study area and the Sevier and Paria River basins, reduction of streamflow, and changes in chemical quality of the water. Two aquifer tests in Johnson Canyon showed that interference can occur between deep and shallow wells in the same aquifer and between wells in underlying and overlying aquifers. Pumping of a well that taps the Navajo Sandstone near Johnson Canyon also indicates the possible reduction of streamflow with increased ground-water withdrawal from the Navajo.

Sufficient data were not available during this study to ascertain a possible shift of the ground-water divide between the study and the Sevier or Paria River basins. Theoretically long-term, large-scale pumping from the Navajo Sandstone in the Alton area could shift the divide between the upper Virgin and Sevier River basins northward; this would divert some ground water naturally tributary to the Sevier River southward into the study area. However, the amount of ground water diverted would be only a small fraction of the water pumped. It probably would be very small compared to the total water supply in the Sevier River basin, which is estimated to exceed 1 million acre-ft (1,230 hm³) per year (Eakin and others, 1971, table 23).

Large withdrawals of freshwater from the Navajo Sandstone probably would induce inflow into that formation of relatively more mineralized water from overlying and underlying rocks. It could also result in increased salinity of Johnson Canyon and Kanab Creeks but probably would not significantly increase the total salt load transported by those streams to the Colorado River.

REFERENCES CITED

- Averitt, Paul, Detterman, J. S., Harshbarger, J. W., Repenning, C. A., and Wilson, R. F., 1955, Revisions in correlation and nomenclature of Triassic and Jurassic Formations in southwestern Utah and northern Arizona: Bulletin of the American Association of Petroleum Geologists, v. 39, no. 12, p. 2515-2535.
- Cook, E. F., 1960, Geologic atlas of Utah; Washington County: Utah Geological and Mineralogical Survey Bulletin 70.
- Cordova, R. M., 1978, Ground-water conditions in the Navajo Sandstone of the central Virgin River basin, Utah: Utah Department of Natural Resources Technical Publication 61.
- Cordova, R. M., Sandberg, G. W., and McConkie, Wilson, 1972, Ground-water conditions in the central Virgin River basin, Utah: Utah Department of Natural Resources Technical Publication 40.
- Eakin, T. E., [Chm.], and others, 1971, Comprehensive framework study, Great Basin Region, Appendix V (water resources): Pacific Southwest Interagency Committee, Water Resources Council.
- Goode, H. D., 1964, Reconnaissance of water resources of a part of western Kane County, Utah: Utah Geological and Mineralogical Survey Water-Resources Bulletin 5.
- 1966, Second reconnaissance of water resources in western Kane County, Utah: Utah Geological and Mineralogical Survey Water-Resources Bulletin 8.
- Gregory, H. E., 1950, Geology and geography of the Zion Park region, Utah and Arizona: U.S. Geological Survey Professional Paper 220.
- 1951, The geology and geography of the Paunsaugunt region, Utah: U.S. Geological Survey Professional Paper 226.
- Handy, A. H., Mower, R. W., and Sandberg, G. W., 1969, Changes in chemical quality of ground water in three areas in the Great Basin, Utah, in Geological Survey Research 1969: U.S. Geological Survey Professional Paper 650-D, p. D229-D234.
- Hintze, L. F., 1976, Geologic history of Utah: Geology Studies, Brigham Young University, v. 20, pt. 3.
- Kohler, M. A., Nordenson, T. J., Baker, D. R., 1959, Evaporation maps of the United States: U.S. Weather Bureau Technical Paper 37.

- Milligan, C. H., Marsell, R. E., and Bagley, J. M., 1966, Mineralized springs in Utah and their effects on manageable water supplies: Utah State University Water Research Laboratory Report WG-23-6.
- Moore, D. O., 1968, Estimating mean runoff in ungaged semiarid regions: Nevada Department of Conservation and Natural Resources Water-Resources Bulletin 36.
- Price, Don, 1980, Map showing general chemical quality of surface water in the Alton-Kolob coal fields area, Utah: U.S. Geological Survey Miscellaneous Investigations Map I-1235-A, scale 1:125,000.
- Sandberg, G. W., 1978, Hydrologic evaluation of the Alton reclamation-study site, Alton coal field, Utah: U.S. Geological Survey Open-File Report 79-346.
- Scofield, C. S., and Wilcox, L. V., 1931, Boron in irrigation water: U.S. Department of Agriculture Technical Bulletin 264.
- Stiff, H. A., Jr., 1951, The interpretation of chemical water analysis by means of patterns: Journal of Petroleum Technology, v. 3, no. 10, p. 15-17.
- Stokes, W. L., ed., 1964, Geologic map of Utah: University of Utah, scale 1:250,000.
- Theis, C. V., and Conover, C. S., 1963, Chart for determination of the percentage of pumped water being diverted from a stream or drain, in Shortcuts and special problems in aquifer tests: U.S. Geological Survey Water-Supply Paper 1545-C, p. C106-C109.
- U.S. Department of the Interior, 1975, Energy mineral rehabilitation inventory and analysis, Alton coal field: U.S. Department of the Interior p. 85-97.
- 1979a, Final environmental statement, Development of coal resources in southern Utah, Part 2, site-specific analysis: U.S. Department of the Interior.
- 1979b, Quality of water, Colorado River Basin, Progress Report No. 9: U.S. Department of the Interior duplicated report.
- U.S. Geological Survey, 1977, Water resources data for Utah, water year 1976: U.S. Geological Survey Water Data Report UT-76-1.
- 1979, Water resources data for Utah, water year 1978: U.S. Geological Survey Water Data Report UT-78-1.
- U.S. Public Health Service, 1962, Drinking water standards: U.S. Public Health Service Publication 956.
- U.S. Salinity Laboratory Staff, 1954, Diagnosis and improvement of saline and alkali soils: U.S. Department of Agriculture Handbook 60.

U.S. Weather Bureau (no date), Normal annual and May-September precipitation (1931-60) for the State of Utah: Map of Utah, scale 1:500,000.

Utah State Engineer, 1974, Proposed determination of water rights in Colorado River drainage area, Kanab Creek, and Johnson Creek Division, Code 15, Book 1.

Wilson, M. T., and Thomas, H. E., 1964, Hydrology and hydrogeology of Navajo Lake, Kane County, Utah: U.S. Geological Survey Professional Paper 417-C.

Table 18.--Records of selected wells as of June 30, 1978

Location: See explanation of well- and spring-numbering system in text. Depth of well: Reported; M, measured by U.S. Geological Survey. Datum is land surface. Well finish: F, perforated and gravel packed; G, gravel and screen; O, open end; P, perforated; X, open hole. Altitude: Above mean sea level; interpolated from U.S. Geological Survey topographic maps. Water level: Measured by U.S. Geological Survey; R, reported. Yield: Measured by U.S. Geological Survey; E, estimated; R, reported. Use of water: C, commercial; H, domestic; I, irrigation; P, public supply; S, stock; U, unused, unknown, or destroyed. Remarks and other data available: A, aquifer-test results in table 8; C, water-quality data in table 23; D, driller's log in table 26; L, geophysical data in table 7 or in files of the U.S. Geological Survey; W, water-level measurements in table 18 or in figure 10; Z, specific-capacity data in table 9.														
Location	Owner or designation	Year constructed	Depth of well (feet)	Casing		Well finish	Principal aquifer	Altitude (feet)	Water level		Yield		Use of water	Remarks and other data available
				Diameter (inches)	Depth (feet)				Above(+) or below land-surface datum (feet)	Date	Rate (gal/min)	Date		
UPPER KANAB CREEK BASIN														
(C-39-5)18bcd-1	Nevada Power Co. No. 1	1961	1,600	20.18, 16	1,600	F	Tropic Shale to Navajo Sandstone	6,900	86R	8-21-61	-	-	U	Test well. C,D.
30bdc-1	Nevada Power Co. No. 2	1961	1,449	18	1,140	X	Jurassic rocks undivided to Navajo Sandstone	6,850	449.24	6-21-77	-	-	U	Test well. C.D.
(C-40-4)31bda-1	J. G. Robinson	1975	150	14	150	P	Unconsolidated rocks	6,050	16.35	10-14-76	600R	1975	I	Perched aquifer. D,W.
32baa-2	do.	1963	135	16	110	P,X	do.	6,080	35.66	6-18-77	600R	1963	S	Perched aquifer. D.
32bad-1	do.	1970	135	16	94	P	do.	6,065	39.57	10-20-76	850R	1970	I	Perched aquifer. C,D,W.
33cba-2	Rad Wash No. 2	1975	885	10.8	-	-	Jurassic rocks undivided to Navajo Sandstone	6,060	553	12- 8-77	-	-	U	Test well. C,D,L.
(C-40-5)16cdc-1	Bald Knoll well	1974	1,166M	10	14	X	do.	6,645	-	-	-	-	U	Test well; original depth 2,694 feet. C,D,L.
(C-41-4)6aad-1	J. G. Robinson	1975	100	12	100	P	Unconsolidated rocks	5,970	32.28	10-20-76	-	-	I	Perched aquifer. D,W.
(C-41-5)3bda-2	T. Leach	1972	100	10.8	100	F	Winsor Member of Carmel Formation	6,120	56.13	6-30-77	12R	6-30-77	S	Perched aquifer. W.
5aaa-1	Ford Pasture No. 1	1974	204M	8	204	F	Carmel Formation	6,275	64.90	9-22-76	-	-	U	Test well; original depth 957 feet; perched aquifer. C,D,L,W,Z.
(C-42-4)9bdc-1	S. Johnson	1967	585	6	137	X	Navajo Sandstone	6,060	559R	10- -67	2.5	10-21-76	S	C.
(C-42-5)1bab-1	D. Bunting	1968	225	6	10	X	do.	5,600	130R	10- -48	250R	10- -48	S	-
11bab-1	U.S. Bureau of Land Management	1935	160	8.6	160	O	Unconsolidated rocks	5,555	97.01	10- 7-76	-	-	S	C,W.
11bdb-1	L. Judd	1963	245	16	116	P	Navajo Sandstone	5,540	86.64	10- 7-76	600	8-29-77	I	A,C,D,W,Z.
15bdb-1	D. Bunting	1970	200	8	128	X	do.	5,480	41R	5-21-70	90R	5-21-70	S	C,D,W,Z.
23bbb-1	F. Bunting	1960	183	5	105	X	do.	5,470	33R	10-29-60	.2	10-21-76	S	Original depth 195 ft. C,D,Z.
26ccc-1	V. Judd	1960	226	10	87	X	do.	5,420	20.58	2-24-77	45R	11- 2-59	S	C,W,Z.
26ccc-2	do.	1960	285	10	168	X	do.	5,420	25.17	10- 6-76	1,000R	11-13-60	U	A,W,Z.
26cda-1	S. Johnson	1960	26.5	6	26	X	do.	5,400	10.67	10-14-76	-	-	U	W.
26cda-2	do.	1960	380	12	185	P,X	do.	5,400	12.57	10-14-76	390	10-15-76	I	A,C,W,Z.
27aaa-1	J. K. Little	1974	165	12.10	165	P	do.	5,400	.88	2-24-77	284	10- 1-76	I	A,C,W,Z.
27add-1	N. Swirl	1966	125	10	124.5	P	do.	5,420	41R	9-26-66	90	4-28-77	I	C.
27add-2	do.	1970	130	6	70	X	do.	5,440	45.23	10- 7-76	30R	8-19-70	H	A,C,W.
34ddb-1	O. Judd	1972	200M	12	65	P,X	do.	5,400	5.84	6-16-77	600R	6-16-77	I	Original depth 280 ft. C,D,L,W,Z.
35bbb-1	V. Judd	1976	220	10	220	P	do.	5,600	26.32	5-20-77	530	5-30-77	I	C,W.
35bdc-1	R. Scribner	1935	4.3	36	4.3	O	Unconsolidated rocks	5,370	1.7	10- 7-76	-	-	H	C,W.
35bdc-3	J. A. Judd	-	120M	4	3	X	Navajo Sandstone	5,400	29.37	10- 7-76	-	-	U	W.
(C-42-6)19baa-1	Kanab City	1975	560M	27	18	X	do.	5,660	165.51	2-25-77	-	-	U	Test well; original depth 575 feet. C,L,W.
19bdc-1	Kanab City No. 1	1952	271	16	258	P	do.	5,500	46.58	5-27-77	90	9-28-76	P	A,C,D,W,Z.
19bdc-2	Kanab City No. 2	1957	250	16.12	199	P	do.	5,520	54.20	5-27-77	275	9-28-76	P	A,C,W,Z.
30cda-1	Kanab City No. 3	1964	332	8	18	X	do.	5,300	51R	8-10-64	-	-	P	Used for emergency only.
30cda-2	Kanab City No. 5	1973	300	16	100	X	do.	5,300	64.56	2-26-77	400	9-26-76	P	A,C,W,Z.
31dac-1	Kanab City No. 4	1973	185	12	185	F	do.	5,240	46R	6-28-73	135	9-28-76	P	C.
(C-43-4)30bdc-1	M. Robinson	1966	195	6	157	X	Shinarump Member	5,315	121.35	10-19-76	25R	5-17-66	S	D,W.
30bda-1	F. Maddox	1970	270	6	226	X	do.	5,320	138R	1-22-70	15R	12-22-70	S	C,Z.
(C-43-4)19bdc-1	C. Myers and S. Hittson	1976	100	8	100	P	Unconsolidated rocks	5,145	20.90	10- 6-76	60R	7-31-76	H	W,Z.
19bdc-2	L. Little	1977	113	8	112	O	do.	5,145	22.94	10- 1-77	-	-	I	D.
30cca-1	do.	1955	347	10.8	347	O	Chinle Formation	5,120	23.25	10-27-76	-	-	U	Caved.
30cca-2	Greene and Weed Investments	1961	97	8	97	P	Unconsolidated rocks	5,120	30.13	9-28-76	10R	11- 8-77	S	Original depth 347 ft. D,L,W.
31ddd-1	B. Hamblin	1956	269	8	205	X	Shinarump Member	5,110	+60.7	10-27-76	25	6-15-77	I	C,D.
32aad-1	R. Van Hake No. 4	1973	305	12	225	X	do.	5,180	1.74	10- 4-76	237	10-14-76	I	Flows at times. A,C,D,W,Z.
32adb-1	R. Van Hake No. 3	1973	225	12	145	X	do.	5,120	See remarks	10- 5-76	-	-	I	Water level above land surface. C.
33abb-1	R. Van Hake No. 1	1956	94	16	22	X	do.	5,220	24.68	10-27-76	280	10- 5-76	I	C,W,Z.
33cac-1	R. Van Hake No. 2	1970	170	16.8	115	X	do.	5,180	+15R	3-14-70	196	10- 5-76	I	C.
(C-43-5)26bdc-1	Kanab Stake	1973	210	12	56	X	Navajo Sandstone	5,380	7.27	10- 6-76	209	6-15-77	I	C,W,Z.
24cda-1	C. Hulet	1975	245M	6	50	O	Chinle Formation	5,120	36.59	10- 6-76	-	-	S	D,L,W,Z.
24cda-2	do.	-	42.5M	30	-	-	Unconsolidated rocks	5,120	36.50	2-23-77	-	-	S	W.
24cda-3	do.	1977	100M	8	-	-	do.	5,120	37.38	11- 8-77	-	-	S	-
25aaa-1	J. K. Little	1970	107M	6	165	X	do.	5,120	27.40	5-26-77	40R	2-22-70	U	Original depth 175 feet. C,D,W,Z.
25acd-1	L. Little	1960	125	16	-	P	do.	5,135	47R	10-31-60	265R	1960	I	Z.
25bdc-1	J. K. Little	1964	125	6	125	P	do.	5,160	68.13	9-28-76	137R	4-13-64	S	D,W.
25bda-1	do.	1973	125	16	120	P,X	do.	5,140	44.39	9-22-76	50R	1-18-73	I	C,W.
25cac-1	S. Lippincott No. 4	1973	110	16	110	P	do.	5,120	31.49	9-22-76	180R	9-27-77	I	D,W.

Table 18.--Records of selected wells as of June 30, 1978--Continued

Location	Owner or designation	Year constructed	Depth of well (feet)	Casing		Well finish	Principal aquifer	Altitude (feet)	Water level		Yield		Use of water	Remarks and other data available
				Diameter (inches)	Depth (feet)				Above(+) or below land-surface datum (feet)	Date	Rate (gal/min)	Date		
UPPER KANAB CREEK BASIN - Continued														
(C-43-5)25cca-1	S. Lippincott	1973	150	16	60	X	Unconsolidated rocks	5,120	-	-	-	-	-	
25cda-1	S. Lippincott No. 1	1973	110	16	100	P	do.	5,110	28.27	9-22-76	50R	2-19-73	I	C,W.
25cdb-1	S. Lippincott No. 2	1973	115	16	110	P	do.	5,115	29.60	9-22-76	50R	3- 3-73	I	W.
25cdb-2	S. Lippincott No. 3	1973	110	16	110	P	do.	5,115	32.38	4-26-77	250R	11- -73	I	C,W,2.
25ddb-1	L. Little	1957	120	10	105	P	do.	5,120	34.55	9-28-76	400R	7- 2-57	I	W.
25dcb-1	do.	1972	94	10	94	P	do.	5,100	19R	11- 9-72	-	-	I	D.
25dcc-1	do.	1972	94	10	94	P	do.	5,100	19R	11- 4-72	-	-	I	D.
34abd-1	-	1975	400	8	400	-	Chinle Formation	5,210	162.06	9-30-76	20	2-23-77	H	C,W.
35aaa-1	L. Goodfellow	1976	238	6	238	F	Shinarump Member	5,110	35.79	2-23-77	2.7	5- 3-77	H	C,D,W,2.
35dab-2	do.	1977	132	6	-	-	Chinle Formation	5,100	32.13	8-25-77	-	-	U	W.
36acd-1	F. Maddox	-	18	6	-	-	Unconsolidated rocks	5,080	10R	4-26-77	1.7	10-27-76	S	C,2.
36ada-1	do.	1961	200	10	138	F	Unconsolidated rocks, Shinarump Member	5,095	14.42	4-26-77	-	-	I	W.
36cab-1	L. Goodfellow	1973	1,177	16,12	880	F	Shinarump Member, Moenkopi Formation	5,080	13.68	9-20-77	256	5- 4-77	I	A,C,D,L,W,2.
36ccc-1	do.	1975	554M	8	6	X	do.	5,100	29.34	9-30-76	20R	1975	U	Original depth 600 feet. C,L,W.
(C-43-6)9ccc-1	R. Nelson	1975	195	6	21	X	Moenave Formation	5,060	67.14	2-25-77	20R	10- 9-75	H	C,2.
27adb-1	C. Johnson	1974	120	8	140	P,X	Unconsolidated rocks, Chinle Formation	5,000	42.87	10-14-76	50	10-20-76	I	Original depth 225 feet. C,D,W,2.
(C-43-7)12bdb-1	P. Jacobs	1974	265	10,6	265	F	Navajo Sandstone	6,000	204.00	6-14-77	5R	6-14-77	H	C,2.
16bcc-1	Fredonia No. 4	1966	330	10	20	X	do.	5,760	150.61	5-11-77	5R	5-11-77	P	W,2.
16bdd-1	Fredonia No. 3	1967	175	10	10	X	do.	5,680	90.54	5-11-77	90	6-17-77	P	C,W,2.
16dba-1	Fredonia No. 1	1967	159	10	10	X	do.	5,660	56.20	5-11-77	90	9-27-77	P	C,W,2.
16ddb-1	Fredonia No. 2	1967	165	8	3	X	do.	5,660	75R	7- 8-67	20	5-11-77	P	C.
26ddb-1	Fredonia	1972	100	-	-	X	Kayenta Formation	5,280	19R	7-25-72	-	-	-	8-inch diameter borehole.
(C-43-8)34bbb-1	Coral Pink Sand Dunes State Park	1971	912	8,6	912	P	Navajo Sandstone	5,925	847R	9-27-71	21R	5- 1-77	P	C,2.
(C-44-5)2aba-1	L. Goodfellow	1976	92	8	92	P	Shinarump Member	5,100	35.85	5- 2-77	98	5- 2-77	I	A,C,W,2.
2bad-1	D. W. Cox	1976	154	4	150	P	do.	5,109	45.5R	9-13-77	30	9-13-77	I	C,2.
2bad-2	H. Mackelprang	1977	150	4	150	P	do.	5,120	50.55	9-13-77	23	9-18-77	I	A,C,2.
6cbb-1	Judd Bros. and others	1890	80	120	80	-	Unconsolidated rocks, Chinle Formation	4,985	55.50	4-27-77	3.8	11- 8-77	S	C,W.
(C-44-6)5cda-1	Kanab Creek Ranches No. 1	1970	450	8	350	X	Chinle Formation, Shinarump Member	4,870	105R	4- 6-70	130	6- 2-77	S	C.
5ddd-1	Kanab Creek Ranches No. 2	1973	375	8	320	X	Chinle Formation	4,840	64.50	6- 2-77	30R	1- 3-73	U	C,D,L,W.
UPPER VIRGIN RIVER BASIN														
(C-38-6)22dbc-1	D. Christensen	1977	452	4	452	F	Wasatch Formation	7,520	317.18	10- 7-77	9.5	9-29-77	H	C.
29acd-1	do.	1977	272M	4	272	P	do.	7,440	218.02	10- 7-77	-	-	S	
(C-39-6)4acd-1	K. Bowers	1970	170	6	115	X	do.	7,080	61.20	10- 1-77	40R	8- 6-70	H	D,2.
(C-39-11)12ddb-1	L. Glazier	1976	168	6	100	X	Basalt	7,910	85.5	12-10-77	7.6	3-13-77	H	D.
(C-40-7)14bad-1	Glendale Town	1976	120	8	100	X	Wahweap Sandstone	5,880	40R	6-28-76	214	6- 2-77	P	Flowing well; reported flow 700 gal/min. C.D.
(C-40-11)8cdc-1	E. Lee	1965	641	4	641	P	Navajo Sandstone	5,900	335R	8-30-65	-	-	S	Originally drilled to 823 feet. D.
29bdb-1	C. Wright	1966	320	6	20	X	Chinle Formation	5,325	282.83	12-10-77	10R	11-29-66	S	Z.
(C-41-7)4aaa-1	Orderville Town	1969	75	8	75	P	Unconsolidated rocks	5,480	24R	8-12-69	240	7- 1-77	P	C,D,2.
17baa-1	Mt. Carmel Town	1961	60	14	52	P	do.	5,280	7R	3- -61	-	-	P	
19cdc-2	Golden Hand Motel	1966	295	8	59	X	Navajo Sandstone	5,200	242R	11-25-66	-	-	C	D.
30bba-1	Thunderbird Motel	1967	310	8	250	X	do.	5,190	232.71	6-29-77	35R	6-29-77	C	D,2.
(C-41-9)10cdd-1	H. Drews	1966	186	6	186	P	Jurassic rocks, undivided and above Navajo Sandstone	6,235	123R	3-26-66	-	-	H	C.
15aad-1	do.	1966	147	6	147	P	do.	6,120	104R	4- 6-66	13	11-12-77	H	C.
15acd-1	do.	1966	245	6	119	X	Navajo Sandstone	5,970	192.96	11-12-77	-	-	S	D.
15ddb-1	T. Baca	1961	231	6	73	X	do.	5,980	193R	12- 1-61	3	11-12-77	S	C,2.
20bdb-1	U.S. National Park Service	1962	924.5	8	924.5	P	do.	5,690	865R	7-31-62	9.4R	7-31-62	H	
(C-41-10)28bca-1	J. Voyles	1963	555	6	500	X	Shinarump Member	4,050	170R	8-12-63	-	-	H	C.
28bdb-1	Springdale Town	1971	100	16	100	P	Unconsolidated rocks, Chinle Formation	3,930	21.36	12- 7-77	-	-	P	D.
(C-42-10)7acb-1	Rockville Pipeline Co.	1971	90	8	3	X	Shinarump Member	4,100	34R	6-10-71	-	-	P	Z.
7bdd-1	do.	1975	110	8	94	P,X	do.	4,150	8R	12-31-75	75R	12-31-75	P	C,2.
(C-42-11)1dcb-1	G. Steed	1968	92	8	70	P,X	Unconsolidated rocks, Moenkopi Formation	3,700	17.31	12- 9-77	-	-	I	C,D.
1ddc-1	W. Sweeten	1968	118	8,6	110	P,X	Moenkopi Formation	3,725	71.06	12- 9-77	-	-	U	
3aad-1	A. Cox	1968	154	10	53	X	do.	3,750	78.26	12- 9-77	-	-	I	D.
3ac-1	Grafton Town	1934	62	6,4	62	P	Unconsolidated rocks	3,650	18.17	12-21-57	30R	11-12-34	U	Abandoned town.

Table 18.--Records of selected wells as of June 30, 1978--Continued

Location	Owner or designation	Year constructed	Depth of well (feet)	Casing		Well finish	Principal aquifer	Altitude (feet)	Water level		Yield		Use of water	Remarks and other data available
				Diameter (inches)	Depth (feet)				Above (+) or below land-surface datum (feet)	Date	Rate (gal/min)	Date		
UPPER VIRGIN RIVER BASIN--Continued														
(C-42-11)4aaa-1	C. Stout	1961	38	14	38	P	Unconsolidated rocks	3,640	4.69	12- 9-77	-	-	I	Z.
4aaa-2	do.	1972	86	14	50	P	do.	3,640	3.45	12- 9-77	-	-	U	
18ddd-1	C. Hale, Jr.	1965	332	8	142	X	Moenkopi Formation	4,960	168R	6-19-65	-	-	U	
19cca-1	K. Hall No. 3	1968	270	16	270	P	Unconsolidated rocks	4,725	106.67	11-15-77	260	6-20-78	I	C,W.
19ccc-1	K. Hall No. 1	1971	285	14	250	P	Unconsolidated rocks, Moenkopi Formation	4,700	94.58	11-15-77	-	-	I	D,W.
19ccc-2	K. Hall No. 2	1975	390	12	285	P	do.	4,710	103.85	11-17-77	660	11-18-77	I	C,W,Z.
19ccc-3	K. Hall	1976	267M	10,8	335	P	do.	4,700	92.64	11-15-77	40R	7-30-76	U	Original depth 375 ft L,W,Z.
29ccd-1	E. DeMille	1974	168	8	160	P,X	Unconsolidated rocks	4,760	153.05	11-15-77	-	-	S	
30bad-1	E. Graff	1973	237	10	205	P,X	Unconsolidated rocks, Moenkopi Formation	4,720	102R	3-11-76	275R	3-11-76	I	Z.
30baa-1	do.	1969	170	10	143	X	Unconsolidated rocks, volcanics	4,720	88R	3-10-69	-	-	I	
30bad-1	do.	1969	238	10	238	P	Unconsolidated rocks	4,720	86R	3-24-69	-	-	I	
32abb-1	do.	1971	200	6	185	X	Shinarump Member	4,800	158.22	11-15-77	-	-	S	
32ada-1	do.	1973	250	6	196	X	do.	4,845	174.80	11-15-77	-	-	S	D.
32dcc-1	do.	1969	130	6	30	X	do.	4,820	70.88	11-15-77	-	-	S	
34bbb-1	H. Hirschi	1963	455	6	425	X	do.	4,960	420R	9-14-63	1.5R	9-14-63	S	D.
(C-42-12)2dcd-1	Virgin Town	1977	610	6	400	X	do.	5,000	-	-	300R	4-27-77	P	Horizontal well. Per aquifer. C.
11aac-1	do.	1977	178	8	-	-	do.	5,080	115.68	11-17-77	400R	1977	U	Perched aquifer. Z.
11adb-1	E. Lee	1960	170	6	20	X	do.	5,080	128.22	11-17-77	.9R	4-22-60	S	Perched aquifer. D.
18ccd-1	E. Branham	1962	75	6	75	P	Unconsolidated rocks, Moenkopi Formation	4,240	36R	7- 7-62	45R	9-21-63	H	D.
18ccd-2	do.	1964	98	14	35	X	do.	4,245	46R	11-18-64	94R	4-18-75	I	C.
23daa-1	D. Ballard	1974	123	12	123	F	Unconsolidated rocks, volcanics	4,640	31.69	11-16-77	94	6-20-78	I	C,Z.
23daa-2	do.	1977	236M	10	169	X	do.	4,640	59.23	12- 7-77	-	-	U	Original depth 245 ft D.
23dab-1	do.	1977	280	10	-	F	Unconsolidated rocks	4,640	88.40	6-20-78	600R	1977	I	Z.
24abb-1	do.	1977	190	10	170	F	do.	4,645	37R	3-18-77	-	-	U	
24ddb-1	E. Graff	1971	252	10	252	P	do.	4,680	63	3-17-71	-	-	I	
(C-43-10)23ddd-1	Colorado City Area Development Co.	1968	84	8	84	G	do.	5,120	13.5R	3-27-68	200R	6-24-68	I	Z.
34add-1	United Effort Plan	1968	90	8	60	G,X	do.	5,050	15R	2- 3-68	190R	2- 3-68	I	Supplies Hildale. D,Z
34dbd-1	do.	1968	-	-	-	-	do.	5,035	30R	1978	200	1978	P	Supplies Hildale.
(C-43-11)5aad-1	E. Graff	1972	205	10	133	X	Shinarump Member	4,850	182.28	11-15-77	-	-	S	
15ccb-1	Colorado City Area Development Co.	1969	167	8,6	6	X	do.	4,840	135.73	11-15-77	-	-	S	D.
SEVIER RIVER BASIN														
(C-38-6)22acb-1	D. Christensen	1977	270	6,4	-	F	Wasatch Formation	7,360	214.03	9-29-77	-	-	H	

Table 19.--Water levels in selected observation wells

See data-site-numbering system in text.

Water levels are in feet below or above(+) land-surface datum.

UPPER KANAB CREEK BASIN

<u>(C-40-4½)31bda-1</u>						
Oct. 14, 1976	16.35	Apr. 28, 1977	16.31	Nov. 9, 1977	18.13	
Feb. 25, 1977	14.75	June 18	47.46	June 21, 1978	13.98	
<u>(C-40-4½)32bad-1</u>						
Oct. 20, 1976	39.57	Apr. 28, 1977	34.93	Nov. 9, 1977	39.80	
Feb. 25, 1977	35.34	June 18	46.05	June 21, 1978	37.46	
<u>(C-41-4½)6aad-1</u>						
Oct. 20, 1976	32.28	June 18, 1977	33.02	Dec. 8, 1977	34.10	
Feb. 25, 1977	32.97	Aug. 27	33.51	June 21, 1978	32.70	
Apr. 28	32.86	Nov. 9	34.03			
<u>(C-41-5)3bda-2</u>						
June 30, 1977	56.13	Nov. 10, 1977	55.40	Dec. 8, 1977	55.24	
<u>(C-41-5)5aaa-1</u>						
Sept. 22, 1976	64.90	Apr. 28, 1977	65.13	Aug. 23, 1977	65.12	
Feb. 25, 1977	65.02	June 18	65.11	Nov. 9	65.23	
<u>(C-42-5)11bab-1</u>						
Oct. 7, 1976	97.01	Apr. 30, 1977	94.02	Aug. 24, 1977	94.44	
Feb. 24, 1977	93.78	May 13	94.11	Aug. 29	94.82	
Apr. 4	93.95	June 18	94.36	Sept. 17	94.58	
Apr. 28	94.02	July 2	94.25	Nov. 9	94.38	
Apr. 29	93.94	July 5	94.36			
<u>(C-42-5)11bdb-1</u>						
Oct. 7, 1976	86.64	July 5, 1977	89.61	Nov. 9, 1977	86.70	
Feb. 24, 1977	85.83	Aug. 24	a 113.68	Dec. 8	86.34	
Apr. 30	88.63	Aug. 29	91.51	June 21, 1978	86.40	
July 2	88.19	Sept. 17	88.30			
<u>(C-42-5)15bdc-1</u>						
Mar. 25, 1976	87.60	Mar. 31, 1976	87.55	Apr. 5, 1976	87.50	
Mar. 29	87.61	Apr. 2	87.57			
<u>(C-42-5)26ccc-1</u>						
Feb. 24, 1977	20.58	May 28, 1977	21.99	June 15, 1977	22.85	
May 19	21.04	May 29	22.10	June 24	22.35	
May 20	21.03	May 30	22.23	Aug. 24	23.20	
May 25	21.80	May 31	22.30	Nov. 8	22.28	
May 26	21.85	June 3	22.53			
<u>(C-42-5)26ccc-2</u>						
Feb. 24, 1977	24.20	Apr. 30, 1977	25.48	May 26, 1977	28.04	
Apr. 27	25.80	May 19	24.76	May 28	28.24	
Apr. 28	26.40	May 20	24.66	May 29	28.45	
Apr. 29	26.79	May 25	27.89	May 30	28.67	

Table 19.--Water levels in selected observation wells--Continued

UPPER KANAB CREEK BASIN--Continued

(C-42-5) 26ccc-2 - Continued

May 31, 1977	28.67	June 24, 1977	26.56	Nov. 9, 1977	25.23
June 2	29.03	July 2	29.23	Dec. 8	28.54
June 3	29.13	Aug. 24	27.38	Apr. 17, 1978	23.97
June 15	26.80	Sept. 17	26.12	June 21	27.17
June 21	26.33				

(C-42-5) 26cda-1

Oct. 14, 1976	10.67	Apr. 27, 1977	21.78	Aug. 24, 1977	15.10
Oct. 15	10.09	June 16	12.35	Nov. 9	8.34
Feb. 24, 1977	7.12	June 21	10.60	June 21, 1978	25.49

(C-42-5) 26cda-2

Oct. 14, 1976	12.57	Apr. 27, 1977	a 85.03	Aug. 24, 1977	14.36
Oct. 15	a 78.60	June 16	12.68	Nov. 9	10.20
Feb. 24, 1977	8.42	June 21	11.39		

(C-42-5) 27aaa-1

Oct. 1, 1976	a 50.59	May 13, 1977	3.57	Aug. 24, 1977	0.64
Feb. 24, 1977	.88	May 15	.51	Nov. 9	.89
Apr. 28	a 45.08	May 16	.28	June 21, 1978	3.27
May 12	7.22	June 16	.25		

(C-42-5) 27add-2

Oct. 7, 1976	45.23	Apr. 27, 1977	48.36	June 24, 1977	46.30
Feb. 24, 1977	44.27	Apr. 28	46.90	Nov. 9	44.86

(C-42-5) 34dbb-1

June 16, 1977	5.84	Sept. 17, 1977	6.54	Nov. 9, 1977	6.45
Aug. 24	6.47				

(C-42-5) 35bbb-1

Apr. 27, 1977	32.50	May 20, 1977	26.32	June 21, 1977	30.60
May 19	26.29	June 15	32.70		

(C-42-5) 35bdc-1

Oct. 7, 1976	1.70	June 20, 1977	2.92	July 5, 1977	3.85
Feb. 24, 1977	1.65	June 23	2.90	Aug. 24	3.90
June 16	3.13	June 25	3.10	Nov. 9	2.35
June 18	1.99	July 2	3.70		

(C-42-5) 35bdc-3

Oct. 7, 1976	29.37	June 20, 1977	30.64	July 7, 1977	31.86
Feb. 24, 1977	28.70	June 23	30.53	July 15	b 32.75
Apr. 27	29.17	June 25	30.54	Aug. 24	31.74
June 3	30.97	July 2	31.37	Sept. 17	30.90
June 16	30.87	July 5	31.71	Nov. 9	29.95
June 18	30.71				

(C-42-6) 19baa-1

Feb. 25, 1977	165.51	May 1, 1977	165.77	May 12, 1977	165.80
---------------	--------	-------------	--------	--------------	--------

Table 19.--Water levels in selected observation wells--Continued

UPPER KANAB CREEK BASIN--Continued

(C-42-6) 19baa-1 - Continued

Apr. 26, 1977	165.81	May 10, 1977	165.85	May 15, 1977	165.87
May 20, 1977	165.98	June 14, 1977	165.98	Nov. 8, 1977	166.05
May 25	165.88	July 3	165.94	Dec. 8	166.15
May 27	165.82	Aug. 27	165.88	Apr. 18, 1978	166.58
May 31	166.16	Sept. 28	166.10	June 22	166.53
June 3	165.98				

(C-42-6) 19bdc-1

Mar. 15, 1962	29.73	May 15, 1977	ac 171.39	July 3, 1977	ac 171.40
Dec. 18	c 42.06	May 25	51.10	Aug. 27	ac 171.40
Apr. 27, 1963	c 41.97	May 27	49.18	Sept. 28	ac 171.39
Feb. 25, 1977	59.80	June 14	53.10	Nov. 8	a 137.58
May 10	ac 171.20				

(C-42-6) 19bdc-2

May 10, 1977	a 120.66	June 14, 1977	a 113.90	Sept. 28, 1977	a 141.00
May 15	a 132.28	July 3	a 114.00	Nov. 8	54.80
May 25	58.64	Aug. 27	a 133.21	Dec. 8	a 114.20
May 27	54.20				

(C-42-6) 30cda-2

Feb. 26, 1977	64.56	Sept. 28, 1977	79.36	Nov. 8, 1977	72.50
July 3	a 117.04	Sept. 29	78.85	Dec. 8	67.54
Aug. 27	a 116.23				

(C-43-4) 30bdd-1

Oct. 19, 1976	121.35	June 15, 1977	120.96	Nov. 8, 1977	121.05
Feb. 24, 1977	120.72	Aug. 24	120.93	June 22, 1978	121.12
Apr. 26	120.92				

(C-43-4½) 19cbc-1

Oct. 6, 1976	20.90	Apr. 26, 1977	20.35	June 15, 1977	19.85
Feb. 23, 1977	21.58				

(C-43-4½) 30cca-2

Sept. 28, 1976	30.13	June 15, 1977	30.35	Nov. 8, 1977	32.82
Feb. 23, 1977	30.35	Aug. 24	30.49	June 21, 1978	31.44
Apr. 26	30.30				

(C-43-4½) 32aad-1

Oct. 5, 1976	1.74	June 15, 1977	2.15	Sept. 15, 1977	d 130.14
Oct. 14	a 45.00	July 5	2.30	Nov. 8	9.04
Feb. 24, 1977	1.60	Aug. 24	+1.06	July 21, 1978	+4.7
Apr. 26	2.01				

(C-43-4½) 33abb-1

Oct. 27, 1976	24.68	June 15, 1977	24.09	Nov. 8, 1977	26.14
Feb. 24, 1977	23.87	July 15	23.90	June 21, 1978	24.38
Apr. 26	24.08	Aug. 24	24.10		

Table 19.--Water levels in selected observation wells--Continued

UPPER KANAB CREEK BASIN--Continued

<u>(C-43-5) 2bbd-1</u>						
Oct. 6, 1976	7.27	Apr. 27, 1977	7.52	Aug. 24, 1977		8.70
Feb. 23, 1977	5.41	June 15	a 37.56	Nov. 9		8.42
<u>(C-43-5) 24dca-1</u>						
Oct. 6, 1976	36.57	Dec. 8, 1977	36.99	June 21, 1978		35.20
Nov. 8, 1977	37.49					
<u>(C-43-5) 24dca-2</u>						
Oct. 6, 1976	36.43	June 15, 1977	36.40	Nov. 8, 1977		36.80
Feb. 23, 1977	36.50	Aug. 24	36.77	Dec. 8		36.46
Apr. 26	36.38					
<u>(C-43-5) 25aaa-1</u>						
May 26, 1977	27.40	Aug. 23, 1977	27.87	Dec. 8, 1977		28.00
June 18	27.41	Nov. 10	28.10	June 22, 1978		26.00
<u>(C-43-5) 25bbd-1</u>						
Sept. 28, 1976	68.13	June 15, 1977	69.34	Nov. 8, 1977		68.50
Feb. 23, 1977	67.95	Aug. 24	67.94	Dec. 8		68.50
Apr. 26	67.98	Sept. 28	68.33	June 21, 1978		68.64
<u>(C-43-5) 25bda-1</u>						
Sept. 22, 1976	44.39	June 15, 1977	44.44	Sept. 28, 1977	a 88.76	
Feb. 23, 1977	44.28	Aug. 24	46.50	Nov. 8		47.69
Apr. 26	44.35	Sept. 27	a 90.30	June 21, 1978		45.44
<u>(C-43-5) 25cac-1</u>						
Sept. 22, 1976	31.49	June 15, 1977	31.53	Nov. 8, 1977		38.02
Feb. 23, 1977	31.40	Aug. 24	32.34	Dec. 8		34.96
Apr. 26	31.36	Sept. 28	a 79.95	June 21, 1978		37.47
<u>(C-43-5) 25cda-1</u>						
Sept. 22, 1976	28.27	June 15, 1977	28.41	Nov. 8, 1977		31.38
Feb. 23, 1977	28.29	Aug. 24	28.88	Dec. 8		30.82
Apr. 26	28.20	Sept. 28	30.08	June 21, 1978		31.35
<u>(C-43-5) 25cdb-1</u>						
Sept. 22, 1976	29.60	June 15, 1977	29.44	Nov. 8, 1977		35.18
Feb. 23, 1977	29.48	Aug. 24	30.20	Dec. 8		32.63
Apr. 26	29.46	Sept. 28	33.06	June 21, 1978		34.46
<u>(C-43-5) 25cdb-2</u>						
Apr. 26, 1977	32.38	Aug. 24, 1977	33.48	Sept. 28, 1977	a 53.73	
June 15	32.49					
<u>(C-43-5) 25dbb-1</u>						
Sept. 28, 1976	34.55	Aug. 24, 1977	35.00	Nov. 8, 1977		36.64
Apr. 26, 1977	34.44	Sept. 28	35.65	June 21, 1978		36.74
June 15	34.48					

Table 19.--Water levels in selected observation wells--Continued

UPPER KANAB CREEK BASIN--Continued

<u>(C-43-5) 34abd-1</u>						
Sept. 30, 1976	162.06	Apr. 26, 1977	165.12	Aug. 24, 1977	160.42	
Feb. 23, 1977	a 231.59	Apr. 28	160.23	Nov. 8	162.58	
Feb. 24	160.33	June 15	167.15	June 12, 1978	162.56	
<u>(C-43-5) 35aaa-1</u>						
Feb. 23, 1977	39.79	May 3	a 71.75	Aug. 25, 1977	38.28	
Apr. 26	40.11	June 15	36.43	Nov. 10	38.43	
<u>(C-43-5) 35dab-2</u>						
Aug. 25, 1977	32.13	Sept. 22, 1977	32.15	Dec. 8, 1977	32.74	
Sept. 21	32.18	Nov. 8	33.40	June 21, 1978	31.43	
<u>(C-43-5) 36ada-1</u>						
Apr. 26, 1977	17.42	Aug. 25, 1977	17.85	Nov. 8, 1977	18.25	
June 15	17.10					
<u>(C-43-5) 36cab-1</u>						
Sept. 30, 1976	10.60	June 15, 1977	d 29.40	Sept. 20, 1977	13.68	
Feb. 23, 1977	10.68	Aug. 25	d 18.95	Nov. 8	12.93	
Feb. 25	10.61	Sept. 15	13.75	Dec. 8	12.19	
Apr. 26	d 20.00	Sept. 16	13.71	June 22, 1978	12.09	
May 4	d 24.67	Sept. 19	13.60			
<u>(C-43-5) 36ccc-1</u>						
Sept. 30, 1976	29.34	May 17, 1977	29.72	July 5, 1977	30.00	
Oct. 5	29.61	May 20	29.78	Aug. 25	30.55	
May 4, 1977	29.65	May 28	29.79	Nov. 8	31.09	
May 13	29.78	June 15	29.95	June 22, 1978	31.86	
<u>(C-43-6) 27dbd-1</u>						
Oct. 14, 1976	42.87	June 16, 1977	41.36	Nov. 8, 1977	41.66	
Feb. 24, 1977	41.80	Aug. 23	41.96	June 21, 1978	41.70	
Apr. 27	43.20					
<u>(C-43-7) 16bcc-1</u>						
May 11, 1977	150.61	June 17, 1977	152.49			
<u>(C-43-7) 16bdd-1</u>						
May 11, 1977	90.54	Sept. 27, 1977	a 139.35	Nov. 11, 1977	94.92	
<u>(C-43-7) 16dba-1</u>						
May 11, 1977	56.20	Sept. 27, 1977	a 105.50	Nov. 11, 1977	63.42	
June 17	a 96.60					
<u>(C-44-5) 2aba-1</u>						
Apr. 30, 1977	a 54.23	May 4, 1977	36.10	Aug. 25, 1977	37.17	
May 2	35.85	June 15	a 54.04	Nov. 10	40.12	
<u>(C-44-5) 6cbb-1</u>						
Sept. 30, 1976	59.59	Apr. 27, 1977	55.50	Aug. 26, 1977	55.65	
Feb. 24, 1977	a 58.20	June 15	58.00	Nov. 8	a 59.10	

(C-44-6)5ddd-1

June 2, 1977 64.50 Aug. 28, 1977 63.05 Nov. 10, 1977 62.44

UPPER VIRGIN RIVER BASIN

(C-42-11)19cca-1

Nov. 15, 1977 106.67 Nov. 18, 1977 109.54 Dec. 7, 1977 105.61

(C-42-11)19ccc-1

Nov. 15, 1977 94.58 Nov. 17, 1977 94.44 Dec. 7, 1977 93.58
Nov. 16 94.50 Nov. 18 97.94

(C-42-11)19ccc-2

Nov. 17, 1977 102.55 Dec. 7, 1977 101.02 June 20, 1978 a 123.73
Nov. 18 a 115.05

(C-42-11)19ccc-3

Nov. 15, 1977 92.64 Nov. 17, 1977 92.59 Dec. 7, 1977 92.04
Nov. 16 92.64 Nov. 18 95.50 June 20, 1978 110.09

a Pumping.

b Reported.

c Nearby well pumping.

d Recently pumped.

Table 20.--Selected drillers' logs of wells

Altitudes are in feet above mean sea level for land surface at well; interpolated from U.S. Geological Survey topographic maps.
 Thickness in feet.
 Depth in feet below land surface.
 Geologic designations and simplification of logs by R. M. Cordova.

Material	Thickness	Depth	Material	Thickness	Depth	Material	Thickness	Depth
UPPER KANAS CREEK BASIN								
<u>(C-39-5)18bcd-1.</u> Log from 0 to 703 ft by Phelps Pump and Equip. Co. and from 703 to 1,600 ft by R. Meas Co. Alt. 6,900.			<u>(C-40-5)16cdc-1.</u> Log from 0-1,148 ft by Rudy Johnson Drilling Co., from 1,148 to 2,694 by Gunnison Drilling Co. Alt. 6,645.			<u>(C-42-6)19hdc-1.</u> Log by H. Maroney. Alt. 5,500.		
Unconsolidated terrace deposits:			Valley fill:			Valley fill.....	18	18
Clay and silt.....	52	52	Silt, clayey, and silty clay....	55	55	Navajo Sandstone:		
Tropic Shale:			Jurassic rocks, undivided:			Sandstone, red.....	87	105
Coal.....	19	71	Sandstone, light-gray to white, very fine and fine-grained, minor shale, and siltstone....	199	254	Sandstone, white.....	31	136
Shale with minor sandstone.....	49	120	Siltstone, tan, some sandstone and mudstone; water at 370 ft.....	321	575	Sandstone, red.....	62	198
Limestone with minor shale.....	25	145	Shale, gray and brown, and gypsum.....	57	632	Tenney Canyon Member of Kayenta Formation:		
Sandstone and limestone.....	110	255	Sandstone, fine-grained, light-brown to tan, gypsum, minor shale, and mudstone.....	118	750	Shale, red, and sandstone.....	42	240
Shale with minor sandstone.....	75	330	Carmel Formation:			Shale, red.....	31	271
Coal.....	4	334	Limestone, some gypsum, siltstone, shale, and sandstone.....	210	960			
Shale with sand streaks.....	44	378	Navajo Sandstone:					
Undifferentiated Cretaceous and Jurassic rocks:			Sandstone, medium- and fine-grained, gray to white, frosted.....	514	1,474			
Sandstone with shale streaks....	38	416	Sandstone, fine- to medium-grained, white to light-red, frosted.....	395	1,869			
Shale with sand streaks.....	12	428	Sandstone, fine- to medium-grained, light-red, frosted... 505	2,374				
Sandstone with shale streaks....	69	497	Tenney Canyon Member of Kayenta Formation:					
Shale, arenaceous, gray.....	23	520	Siltstone and sandstone.....	60	2,434			
Sandstone with minor shale.....	115	635	Lamb Point Tongue of Navajo Sandstone:					
Shale, arenaceous, green and red.....	68	703	Sandstone, tan to light-pink, grains frosted.....	260	2,694			
Shale, gravelly, red and gray, with minor limestone.....	522	1,225						
Carmel Formation:								
Limestone and shale.....	180	1,405						
Limestone.....	25	1,430						
Navajo Sandstone.....	170	1,600						
<u>(C-39-5)30bdc-1.</u> Log by Oil Inc. Alt. 6,850.			<u>(C-41-4)5aad-1.</u> Log by T. Ballard. Alt. 5,970.			<u>(C-43-4)30cca-1.</u> Log by F. Quinn. Alt. 5,120.		
Tropic Shale:			Valley fill:			Valley fill:		
Shale.....	10	10	Clay and sand.....	35	35	Sand, clay, and rock.....	22	22
Coal.....	14	24	Sand.....	5	40	Sand, clayey, hard.....	10	32
Sandstone and shale.....	126	150	Sand and gravel.....	20	60	Clay, brown.....	23	55
Coal, sandstone, and shale.....	30	180	Clay, sand, and gravel.....	10	70	Sand, quick.....	25	80
Shale and sandstone.....	30	210	Sand and gravel.....	30	100	Sand, clayey.....	15	95
Dakota Sandstone:						Clay and gravel.....	4	99
Sandstone, conglomeratic.....	30	240				Gravel, coarse.....	2	101
Jurassic rocks, undivided:						Gravel and clay.....	29	130
Sandstone and shale.....	390	630				Chinle Formation:		
Sandstone.....	300	930				Shale, gray, brown, and blue... 217	347	
Siltstone and shale.....	30	960						
Carmel Formation:								
Limestone, shale, and gypsum....	240	1,200						
Navajo Sandstone:								
Sandstone.....	249	1,449						
<u>(C-40-4)31bda-1.</u> Log by K. Bentley. Alt. 6,050.			<u>(C-41-5)5aaa-1.</u> Log by Rudy Johnson Drilling Co. Alt. 6,275.			<u>(C-43-4)31ddd-1.</u> Log by P. Bradshaw. Alt. 5,110.		
Valley fill:			Unconsolidated deposits:			Valley fill:		
Clay, sand, and gravel.....	41	41	Silt, clayey, and silty sand....	30	30	Clay, red and gray.....	37	37
Gravel.....	19	60	Carmel Formation:			Sand and gravel.....	2	39
Clay and sand.....	34	94	Limestone, siltstone, shale, and gypsum; water.....	190	220	Chinle Formation:		
Gravel.....	18	112	Navajo Sandstone:			Shale, gray, blue, and red.....	178	217
Jurassic rocks:			Sandstone, very fine to medium-grained, light-gray to white, frosted.....	160	380	Shinarump Member of Chinle Formation:		
Shale.....	38	150	Sandstone, fine- to medium-grained, frosted, white, tan, and light-red; moisture near bottom.....	577	957	Sandstone, conglomeratic.....	38	255
<u>(C-40-4)32baa-2.</u> Log by T. Ballard. Alt. 6,080.						Shale, sandy, gray and red.....	14	269
Valley fill:								
Soil.....	5	5						
Gravel.....	40	45						
Silt and sand.....	10	55						
Gravel.....	11	66						
Clay.....	6	72						
Gravel.....	8	80						
Clay and sand.....	55	135						
<u>(C-40-4)32bad-1.</u> Log by T. Ballard. Alt. 6,065.								
Valley fill:								
Silt.....	35	35						
Gravel.....	55	90						
Jurassic rocks, undivided:								
Shale.....	45	135						
<u>(C-40-4)33cbe-2.</u> Log by J. Moore. Alt. 6,060.								
Valley fill:								
Silt.....	10	10						
Jurassic rocks, undivided:								
Sandstone, limestone, and siltstone.....	58	68						
Limestone, gypsum, and siltstone.....	51	119						
Gypsum, siltstone, and limestone.....	9	128						
Shale, minor limestone, and gypsum.....	10	138						
Carmel Formation:								
Limestone, siltstone, shale, sandstone, and gypsum.....	90	228						
Navajo Sandstone:								
Sandstone, white, tan, and some red-brown shale.....	657	885						

Table 20.--Selected drillers' logs of wells--Continued

Material	Thickness	Depth	Material	Thickness	Depth	Material	Thickness	Depth
UPPER KANAB CREEK BASIN - Continued								
<u>(C-43-5)25cac-1.</u> Log by T. Ballard. Alt. 5,120.			<u>(C-43-5)35aaa-1.</u> - Continued Chinle Formation:			<u>(C-43-6)27abd-1.</u> Log by W. Cox. Alt. 5,000.		
Valley fill:			Shale.....	183	195	Valley fill:		
Sand, red.....	75	75	Shinarump Member of Chinle			Sand.....	35	35
Sand and gravel.....	28	103	Formation:			Gravel.....	60	95
Chinle Formation:			Sandstone, conglomeratic.....	35	230	Chinle Formation:		
Shale, blue.....	7	110	Moenkopi Formation.....	8	238	Shale, red and blue.....	130	225
<u>(C-43-5)25dcb-1.</u> Log by W. Cox. Alt. 5,100.			<u>(C-43-5)36cab-1.</u> Log by Grimeshaw Drilling Co. Alt. 5,080.			<u>(C-44-6)5ddd-1.</u> Log by T. Ballard. Alt. 4,840.		
Valley fill:			Valley fill:			Unconsolidated terrace		
Clay and sand.....	55	55	Sand and gravel.....	21	21	deposits:		
Sand and gravel.....	27	82	Clay.....	7	28	Sand, gravel, and boulders....	10	10
Clay, brown.....	8	90	Shinarump Member of Chinle			Clay, sand, and gravel.....	40	50
Chinle Formation:			Formation:			Gravel.....	10	60
Shale, purple.....	4	94	Sandstone, conglomeratic.....	92	120	Chinle Formation:		
<u>(C-43-5)35aaa-1.</u> Log by D. White. Alt. 5,110.			Moenkopi Formation:			Shale, blue and gray.....	82	142
Valley fill:			Shale, blue.....	330	450	Shale, sandy, red.....	18	160
Sand.....	12	12	Limestone, green.....	330	780	Shale, red and gray.....	182	342
			Sandstone, red.....	100	880	Sandstone, white.....	23	365
			Not reported.....	297	1,177	Shale, reddish-brown.....	10	375
UPPER VIRGIN RIVER BASIN								
<u>(C-39-6)4cad-1.</u> Log by T. Ballard. Alt. 7,080.			<u>(C-41-9)15ded-1.</u> Log by P. Bradshaw. Alt. 5,970.			<u>(C-42-11)34bbb-1.</u> Log by T. Ballard. Alt. 4,960.		
Valley fill:			Valley fill:			Valley fill:		
Clay and gravel.....	10	10	Lam, sandy.....	30	30	Clay and sand.....	5	5
Clay, red.....	40	50	Clay and gravel.....	50	80	Gravel and boulders.....	10	15
Clay, sandy, white and yellow....	25	75	Clay.....	20	100	Sand and gravel.....	85	100
Clay, red.....	30	105	Clay and gravel.....	8	108	Chinle Formation:		
Wasatch Formation:			Gravel and rocks.....	9	117	Shale, gray, blue, and brown..	325	425
Shale, pink.....	65	170	Navajo Sandstone:			Shinarump Member of Chinle		
<u>(C-39-11)12ddb-1.</u> Log by L. Glazier. Alt. 7,910.			Sandstone, yellow.....	98	215	Formation:		
Soil.....	5	5	Sandstone, red and white.....	30	245	Sandstone, white.....	30	455
Lava.....	115	120	<u>(C-41-10)28bdb-1.</u> Log by B. Bradshaw. Alt. 3,930.			<u>(C-42-12)11adb-1.</u> Log by P. Bradshaw. Alt. 5,080.		
Lava, porous, red.....	48	168	Valley fill:			Soil, clay.....	15	15
<u>(C-40-7)14bad-1.</u> Log by W. Cox. Alt. 5,880.			Sand and gravel.....	38	38	Shinarump Member of Chinle		
Valley fill:			Gravel.....	30	68	Formation:		
Clay, sand, and boulders.....	30	30	Clay and gravel.....	2	70	Sandstone, white, yellow,		
Clay, sand, and gravel.....	40	70	Gravel.....	14	84	and gray.....	155	170
Wahweap Sandstone:			Chinle Formation:			<u>(C-42-12)18ccd-1.</u> Log by T. Ballard. Alt. 4,240.		
Sandstone, conglomerate, and			Shale.....	16	100	Terrace deposits:		
shale; coal.....	29	99	<u>(C-42-11)1dcb-1.</u> Log by F. Hastings. Alt. 3,700.			Sand and clay.....	5	5
Sandstone, fractured.....	21	120	Valley fill:			Clay.....	40	45
<u>(C-40-11)8ded-1.</u> Log by P. Bradshaw. Alt. 5,900.			Clay.....	31	31	Sand and gravel.....	5	50
Valley fill:			Clay and gravel.....	7	38	Moenkopi Formation:		
Sand.....	50	50	Gravel.....	10	48	Shale.....	25	75
Volcanic flow rock and			Clay and gravel.....	13	61	<u>(C-42-12)23daa-2.</u> Log by B. Bradshaw. Alt. 4,640.		
cinders.....	214	264	Clay.....	9	70	Valley fill:		
Clay and sand.....	36	300	Moenkopi Formation:			Clay and sand.....	10	10
Navajo Sandstone:			Shale, red.....	22	92	Sand and gravel.....	15	25
Sandstone and some shale.....	456	756	<u>(C-42-11)3aad-1.</u> Log by F. Hastings. Alt. 3,750.			Clay and sand.....	20	45
Keyenta Formation:			Terrace deposits:			Gravel.....	1	46
Shale, red and gray.....	67	823	Gravel, cemented.....	30	30	Clay and sand.....	106	152
<u>(C-41-7)4aaa-1.</u> Log by T. Ballard. Alt. 5,480.			Moenkopi Formation:			Clay.....	11	163
Valley fill:			Shale, red and white.....	124	154	Volcanic rocks:		
Sand.....	18	18	<u>(C-42-11)19ccc-1.</u> Log by B. Bradshaw. Alt. 4,700.			Cinders and clay.....	15	178
Sand, partly cemented.....	22	40	Valley fill:			Lava, solid.....	9	187
Sand and gravel.....	35	75	Clay and sand.....	50	50	Cinders and clay.....	28	215
<u>(C-41-7)19cdc-2.</u> Log by P. Bradshaw. Alt. 5,200.			Sand and gravel.....	40	90	Lava, solid.....	8	223
Valley fill:			Clay and sand.....	50	140	Cinders and clay.....	22	245
Clay, sand, and gravel.....	46	46	Sand and gravel.....	2	142	<u>(C-43-10)34add-1.</u> Log by J. Jessop. Alt. 5,050.		
Carmel Formation:			Clay and sand.....	68	210	Valley fill:		
Limestone and shale.....	39	85	Gravel.....	32	242	Sand with minor clay.....	38	38
Navajo Sandstone.....	210	295	Moenkopi Formation:			Sand.....	7	45
<u>(C-41-7)30bba-1.</u> Log by T. Ballard. Alt. 5,190.			Shale.....	43	285	Clay.....	4	49
Valley fill:			<u>(C-42-11)32ada-1.</u> Log by B. Bradshaw. Alt. 4,845.			Sand.....	21	70
Sand.....	20	20	Valley fill:			Clay and sand.....	20	90
Sand and gravel.....	50	70	Clay and sand.....	60	60	Chinle Formation at bottom		
Sand.....	80	150	Clay, sand, and gravel.....	30	90	<u>(C-43-11)15ccb-1.</u> Log by J. Jessop. Alt. 4,840.		
Clay.....	10	160	Chinle Formation:			Chinle Formation:		
Sand.....	40	200	Shale, purple and gray.....	106	196	Shale, red.....	36	36
Navajo Sandstone.....	110	310	Shinarump Member of Chinle			Shinarump Member of Chinle		
			Formation:			Formation:		
			Sandstone, conglomeratic,			Sandstone, yellow, red, and		
			gray and white.....	54	249	brown.....	129	165
			Moenkopi Formation:			Moenkopi Formation:		
			Shale.....	1	250	Shale, red.....	2	167

Table 21.--Records of selected springs

Location: See explanation of well- and spring-numbering system in text.
 Altitude: In feet above mean sea level; interpolated from U.S. Geological Survey topographic maps.
 Discharge: Measured by U.S. Geological Survey personnel; E, estimated; R, reported. Total is based on an assumed constant annual rate and is rounded.
 Use of water: H, domestic; I, irrigation; P, public supply; S, stock.
 Remarks and other data available: C, water-quality data in table 23; K, field specific conductance, in micromhos per centimeter at 25°C. T, temperature, in degrees Celsius.

in degrees Celsius.								
Location	Name or Owner	Altitude	Aquifer	Discharge		Total for year (acre-ft)	Use of water	Remarks and other data available
				Rate (gal/min)	Date			
UPPER KANAB CREEK BASIN								
(C-39-44)26ddb-S1	Cabin	7,230	Straight Cliffs Sandstone	1.5	10-20-76	2.4	S	C.
35deb-S1	Tenney Creek Dam	7,000	Tropic Shale	6.0	10-20-76	9.6	S	C.
(C-39-5)32bbb-S1	-	6,820	do.	-	-	-	S	Ponded.
32ccb-S1	Gravel pit	6,800	do.	11.2	6-21-77	18	S	C.
(C-40-5)6aaa-S1	Trough	6,700	Unconsolidated rocks	.72	6-20-77	1.2	S	C.
8dda-S1	Spaniard	6,820	Dakota Sandstone	-	-	-	S	Ponded. C.
9ead-S1	Fisher	6,900	Straight Cliffs Sandstone(?)	.86	6-18-77	1.4	S	C.
11ccb-S1	Fuller	6,760	Unconsolidated rocks or Tropic Shale	1.9	6-20-77	3.0	S	C.
(C-41-44)6adc-S1	Boiling	5,910	Unconsolidated rocks	2E	10-20-76	3.2	S	C.
6dae-S1	Terrace	5,925	Carmel Formation	-	-	-	S	Ponded. C.
(C-42-44)32deb-S1	Johnson Lakes	5,480	Navajo Sandstone	15	10-21-76	24	S	C.
(C-42-5)22adb-S1	Pool	5,380	do.	10E	10-20-76	16	I	C.
(C-42-6)4cbb-S1	Pool	5,400	do.	20E	7- 3-77	-	S	T, 20.0; K, 380.
4ccc-S1	Headwaters	5,360	do.	-	-	-	S	T, 15.0; K, 655.
9bbd-S1	-	5,360	do.	-	-	-	S	T, 24.5; K, 390.
17aaa-S1	Stanley	5,280	do.	-	-	-	S	T, 24.0; K, 300.
17aad-S1	-	5,280	do.	-	-	-	S	T, 21.0; K, 210.
17daa-S1	-	5,280	do.	-	-	-	S	T, 21.0; K, 280.
17dba-S1	Big Lake Main	5,360	do.	-	-	-	S	T, 14.0; K, 175.
17dba-S2	Cold	5,360	do.	-	-	-	S	T, 12.0; K, 200.
17ddc-S1	Dugway	5,400	do.	15	10-29-76	24	S	C.
20dab-S1	Upper Green	5,320	do.	1.6	7- 6-77	2.6	S	T, 15.0; K, 300.
20ddc-S1	Middle Green	5,300	do.	2.2	7- 6-77	3.5	S	T, 11.0; K, 340.
29aba-S1	Lower Green	5,280	do.	1.3	7- 6-77	2.1	S	T, 15.0; K, 340.
29dcb-S1	Rockhouse	5,360	do.	2.1	7- 6-77	3.4	H	T, 14.0; K, 310.
30ccb-S1	South	5,500	do.	10E	10- 1-76	16	S	C.
30dbb-S1	Cave	5,400	do.	-	-	-	S	C.
(C-42-7)23ccc-S1	Kanab City No. 1	5,600	do.	-	-	(1)	P	C.
(C-43-4)31aad-S1	Navajo Well	5,325	Shinarump Member	.5E	10-19-76	.80	S	C.
(C-43-44)33baa-S1	The Seeps	5,200	Chinle Formation	60R	9-15-77	96	S	C.
(C-43-5)1ccd-S1	Hackelprang South Pond	5,320	Navajo Sandstone	-	-	-	I	Ponded. C.
2bbd-S1	Latter-day Saints Church	5,360	do.	-	-	-	S	Ponded. T, 20.0; K, 1,080.
2ddd-S1	do.	5,370	do.	-	-	-	S	Ponded. C.
11add-S1	do.	5,320	do.	-	-	-	S	Ponded. T, 22.5; K, 530.
12bda-S1	J. Hackelprang	5,280	do.	1.3	10-12-76	2.1	H	C.
12cca-S1	Latter-day Saints Church	5,320	do.	-	-	-	S	Ponded. T, 19.5; K, 490.
(C-43-6)10ada-S1	Hog Canyon	5,200	Kayenta Formation	2.8	10-27-76	4.5	I	C.
(C-43-7)3ccb-S1	D. Riggs	5,860	Navajo Sandstone	4.6	6-16-77	7.4	S	T, 20.5; K, 320.
3ccb-S2	do.	5,860	do.	2.0	6-16-77	3.2	S	T, 16.0; K, 270.
3ccb-S3	do.	5,860	do.	1.4	6-16-77	2.2	S	
3ccc-S1	do.	5,840	do.	5.0	6-14-77	8.0	S	C.
17acb-S1	Indian Canyon	5,900	do.	-	-	(2)	P	Spring area. C.
17acb-S2	Lower ledge	5,900	do.	-	-	(2)	P	Ponded. C.
17bec-S1	Sand dune	6,230	Dune sand	-	-	(2)	S	Ponded. C.
20aca-S1	South Fork	6,000	Navajo Sandstone	-	-	(2)	P	Spring area. C.
(C-44-5)1bad-S1	-	4,980	Chinle Formation	-	-	-	S	T, 20.0.
UPPER VIRGIN RIVER BASIN								
(C-38-6)26ddd-S1	Town of Alton	7,660	Wasatch Formation	0.27	6-21-77	0.43	S	C.
(C-38-8)17dda-S1	Cascade	9,000	do.	718	8- 2-54	-	I	
(C-39-6)9cbb-S1	-	6,960	do.	-	-	-	1,5	Spring area.
(C-40-7)14bad-S1	Town of Glendale	5,880	Unconsolidated rocks	-	-	-	I	Flow enters Virgin River. C.
(C-40-11)28acd-S1	Grangvins	4,500	Basalt	360	10-17-74	580	I	C.
(C-40-12)2adb-S1	Rock	5,400	Moenave Formation	.37	12-10-77	.6	S	C.
(C-41-13)25c-S1	La Verkin Hot Springs	3,100	Keibab Limestone	4,800E	8-31-60	7,730	I	C.
(C-42-10)7bda-S1	Town of Rockville	4,070	Shinarump Member	1R	8-12-74	1.6	P	
(C-42-12)1cbe-S1	Town of Virgin	4,920	Moenkopi Formation	7R	11-17-77	12	P	
19bbb-S1	-	4,120	Basalt	150	11-16-77	240	I	Spring area. T, 14.5; K, 2,700.
19dbb-S1	Gould	4,240	do.	10E	11-16-77	16	S	T, 7.0; K, 3,400.
(C-43-8)1aca-S1	Yellow Jacket	6,120	Navajo Sandstone	.26	5- 1-77	4.2	S	C.
(C-43-10)21dhd-S1	Jans Canyon	5,600	Navajo Sandstone and Kayenta Formation	20	6-20-78	32	P	T, 15.0; K, 160.
22cdb-S1	Hamwell Canyon	5,400	do.	20E	6-20-78	32	P	T, 15.5; K, 170.
23bad-S1	Water Canyon	5,220	Navajo Sandstone, Kayenta Formation, and Quaternary terrace deposits	630	6-20-78	1,020	I	Spring area. K, 170.
SEVIER RIVER BASIN								
(C-37-6)36cbb-S1	-	7,100	Wasatch Formation	-	-	-	1,5	Spring area.

¹Included in total estimate for Kanab in table 13.

²Included in total estimate for Fredonia, Ariz. (about 7 mi south of Kanab) in table 13.

UPPER KANAS CREEK BASIN: Discharge rate, temperature, and specific conductance of base flow for selected stream reaches
 Specific conductance: Micromhos per centimeter at 25°C as determined from field conductivity meter.

Stream	Measurement site No.	Date	Discharge (ft ³ /s)	Temperature (°C)	Specific conductance	Principal geologic source(s)	Remarks
UPPER KANAS CREEK BASIN							
Kaneb Creek	(C-38-5)33bbd	10- 3-77	1.82	15.5	480	Cretaceous rocks, undivided Navajo Sandstone do.	
	(C-42-6)20aaa	10-29-76	.99	12.0	400		
	(C-42-6)32aca	10-29-76	5.12	11.0	-		
	5- 1-77		5.37	17.0	450		
	6-19-77		4.57	12.0	460		
	9- 2-77		4.13	24.0	460	Navajo Sandstone	
	10- 3-77		5.41	9.5	460		
	11-11-77		6.0	12.0	450		
	(C-43-6)21cbb	6-19-77	4.98	13.5	460		
	(C-43-6)33cba	11-11-77	8.04	-	-		Measurement site on diversion canal
		6-19-77	1.36	23.0	1,500		
		11-11-77	2.10	11.0	-	Kayenta, Moenave, and Chinle Formations	Substantial loss by evapotranspiration upstream from measurement site
Tiny Canyon creek	(C-43-6)5cad	6-19-77	.11	18.5	390	Navajo Sandstone	
		10- 3-77	.07	15.5	440		
		11-11-77	.14	12.0	-		Also some seepage from Kayenta Formation
Hog Canyon creek	(C-43-6)16bbb	10-30-76	.38	2.0	-	Navajo Sandstone	
		5- 1-77	.28	21.0	390		
		6-19-77	.00	-	-		
		9-28-77	.01	19.0	420		
		11-11-77	.19	8.0	-		Also some seepage from Kayenta Formation
Rush Canyon creek	(C-39-5)4aba	10- 3-77	.09	16.0	480	Probably Kaiparowits and Wasatch Formations	Flow consumed near measurement site
Three Lakes Canyon creek	(C-42-6)30dbc	6- 2-77	.07	18.0	350	Navajo Sandstone	
		11-11-77	.08	9.0	-		Measurement site at outlet below lowermost of three ponds; considerable loss by evapotranspiration upstream from site; total flow depleted within 0.25 mi (0.4 km) downstream from site
Water Canyon creek	(C-43-7)7ccb	6-17-77	.06	16.5	410	Navajo Sandstone	
		9-27-77	.07	-	-		
		11-11-77	.16	3.0	-		
Cave Lakes Canyon creek	(C-42-6)30dcc	2 -5-77	.43	4.5	345	Navajo Sandstone	
		9-29-77	.12	15.5	310		
		11-11-77	.19	4.5	-		Seepage chiefly from above Tenny Canyon Member
Mill Creek	(C-40-44)6add	10-20-76	.40	10.0	580	Probably all formations of Cretaceous age	
		11- 9-77	.89	1.0	520		
Thompson Creek	(C-40-44)31bda	10-14-76	.13	13.5	1,400	Probably all formations of Cretaceous age do.	
		6-18-77	.09	26.5	1,500		
		11- 9-77	.05	4.0	1,500		
	(C-41-44)6abd	10-20-76	<.01	9.0	4,000		
		6-18-77	.01	27.5	3,900		
		11-10-77	.02	4.0	3,500		
Johnson Canyon creek	(C-41-5)24acd	6-20-77	.25	26.5	1,950	Carmel Formation and some younger rocks	
		9- 2-77	.03	27.0	1,700		No flow in Johnson Canyon above measurement site; measured discharge was from Skutumpah Creek
	(C-42-5)27aaa	5-12-77	.18	14.5	680	Navajo Sandstone	Seepage from Navajo began about 0.8 mi (1.3 km) upstream from measurement site
	(C-43-44)18ccc	10-12-76	.51	20.0	720	do.	Measurement site in concrete diversion ditch; diversion for irrigation and stock within; no return flow to creek
	(C-43-44)30ccc	10-12-76	.32	18.0	1,300	Moenave and Chinle Formations	
		5-12-77	.34	19.5	1,400		
		9- 2-77	.14	17.0	-		Flow diverted at site (C-43-44)31bbd with no return flow to creek
	(C-43-5)12bdc	11-10-77	.23	5.0	-	Navajo Sandstone	
		5-12-77	.66	18.0	850		
		9- 2-77	.47	16.0	-		Total flow diverted at measurement site
	36dcc (C-44-5)11adc	11-10-77	.78	6.0	-	Chinle Formation Shinarump Member of the Chinle Formation	
		10-13-76	.32	12.0	2,000		
		10-13-76	.37	16.0	2,700		
		5-12-77	.13	22.5	4,800		
UPPER VIRGIN RIVER BASIN							
Pine and Clear Creeks	(C-41-10)15ccc	12- 6-77	0.23	5.5	1,550	Navajo Sandstone	
North Creek	(C-41-12)12aac	12- 9-77	4.0	9.0	800	Basalt	Also minor seepage from Kayenta and Moenave Formations
North Fork Virgin River	(C-41-10)15cac	12- 9-77	39.2	9.5	890	Moenkopi Formation and Shinarump Member of the Chinle Formation	
Horse Valley Wash	(C-42-11)11aca	12- 9-77	.20	2.0	1,700	do.	Also some seepage from older sedimentary rocks
La Verkin Creek	(C-41-13)12bcd	12-10-77	3.16	8.0	980	Moenkopi Formation and Kaibab Limestone	
Muddy Creek	(C-40-8)36dac	10- 3-77	.68	16.5	900	Tropic Shale and younger rocks	
Lydias Creek	(C-39-7)29bbb	6-22-77	.36	18.0	400	Wahweap Sandstone and Kaiparowits Formation	
	(C-40-7)4cba	6-22-77	.05	24.0	440	do.	Substantial loss by evaporation and diversion of springflow for domestic use upstream from measurement site
East Fork Virgin River	(C-40-7)1bbd	10- 2-77	9.2	10.0	430	Wasatch and Kaiparowits Formations; Wahweap Sandstone and Tropic Shale do.	Excludes 0.036 ft ³ /s measured at site (C-39-7)4cba
	(C-39-7)36(?)	6-22-78	5.0	18.0	440		Measurement site about 1.0 mi (1.6 km) downstream from Stout Canyon
Stout Canyon creek	(C-40-7)1bbd	6-22-78	7.32	19.0	440	Wasatch and Kaiparowits Formations; Wahweap Sandstone	Measurement site upstream from Stout Canyon

Table 23.--Chemical analyses and temperature of water from selected wells, springs, and base-flow-measurement sites

Location: See explanation of data-site numbering system in text.

Location	Date of collection	Temperature (°C)	Milligrams per liter, unless indicated otherwise																Dissolved solids (sum of determined constituents)	Alkalinity as CaCO ₃	Hardness (Ca, Mg)	Noncarbonate hardness	Specific conductance (microhms per centimeter at 25°C)	pH	Sodium-adsorption ratio
			Dissolved silica (SiO ₂)	Dissolved iron (Fe) (µg/L)	Dissolved manganese (Mn) (µg/L)	Dissolved calcium (Ca)	Dissolved magnesium (Mg)	Dissolved sodium (Na)	Dissolved potassium (K)	Bicarbonate (HCO ₃)	Carbonate (CO ₃)	Dissolved sulfate (SO ₄)	Dissolved chloride (Cl)	Dissolved fluoride (F)	Dissolved nitrate (NO ₃) + nitrite (NO ₂) as nitrogen (N)	Dissolved orthophosphate (PO ₄)	Dissolved boron (B) (µg/L)								
UPPER KANAB CREEK BASIN																									
Wells																									
(C-39-5)18bcd-1	9- 8-62 ^{1/}	-	26	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
30bdc-1	12-20-62	-	17	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
(C-40-4)32bad-1	5- -62 ^{1/}	-	8.3	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
33cda-2	8-13-74	10.0	9.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
(C-40-5)16cdc-1	12- 8-77	14.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
(C-41-5)5aaa-1	12-20-74	-	8	-	-	30	35	6.7	225	8.5	187	0	425	14	-	-	-	-	-	-	-				
(C-42-4)9bbc-1	8-23-77	13.0	15	90	30	540	180	92	5.5	230	0	2,000	37	1.3	0.60	0.15	20	905	154	116	0				
(C-42-5)11bab-1	10-21-76	13.5	11	-	-	40	13	7.3	2.0	186	0	11	6.4	-	-	-	320	2,980	190	2,100	1,900				
11bdb-1	10- 7-76	-	15	-	-	150	53	42	4.2	195	-	450	13	-	1.9	0.06	20	191	153	150	1				
15bdc-1	8-29-77	13.5	12	40	20	68	27	16	2.7	180	0	140	7.7	-	-	0.03	50	832	160	590	430				
	10- 7-76	12.0	11	-	-	110	49	24	3.2	269	0	260	8.6	-	-	-	60	362	150	280	130				
23bbb-1	10-14-76	-	7.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	619	221	460	260				
26ccc-1	10- 7-76	-	9.9	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-				
26cda-2	10-15-76	13.0	12	-	-	48	20	7.9	2.1	188	-	52	6.3	-	-	-	-	151	106	120	16				
27aaa-1	6-23-77	13.0	11	30	0	35	17	4.9	1.6	167	-	11	6.1	-	2.6	0.18	40	245	154	200	48				
	10- 1-76	13.5	10	-	-	36	16	5.0	1.6	170	0	8.9	6.4	-	2.4	0.00	10	182 ^{2/}	137	160	20				
	5-16-77	13.0	11	-	-	39	14	5.7	1.7	157	-	19	6.9	-	1.4	0.03	20	180	140	160	17				
	5-18-77	13.0	11	-	-	38	13	4.4	1.5	160	0	13	6.9	-	1.4	0.03	20	180	129	160	26				
27add-1	10- 7-76	-	11	-	-	44	19	7.5	1.3	191	-	16	5.7	-	1.2	0.09	30	172	130	150	17				
27add-2	4-27-77	13.0	9.7	-	-	58	24	10	2.4	220	0	29	6.4	-	0.58	0.03	40	175	130	150	20				
34ddb-1	8-24-77	18.0	3.1	430	180	42	23	19	4.0	130	0	68	7.2	-	0.79	0.06	0	215	157	190	31				
35bbb-1	4-27-77	13.0	9.6	-	-	43	20	7.8	1.7	190	-	130	7.8	-	-	-	40	291	180	240	63				
	5-25-77	13.0	9.4	20	30	42	19	7.5	1.8	190	0	33	7.0	-	1.1	0.21	60	294	110	200	93				
	5-28-77	13.0	9.5	10	20	42	19	7.5	1.8	190	0	30	6.2	-	0.96	0.03	50	221	156	190	34				
35bdc-1	6- 1-77	13.0	9.5	20	40	42	19	8.0	1.8	180	0	28	6.2	-	0.97	0.00	50	212	160	180	27				
(C-42-6)19baa-1	10- 7-76	15.0	16	-	-	54	27	13	8.5	247	0	29	6.3	-	0.92	0.09	50	209	150	180	36				
19bdc-1	8-28-77	14.5	2	130	10	19	9.9	18	2.4	100	0	53	11	-	0.98	0.37	100	309	203	250	43				
19bdc-2	9-28-76	14.5	14	-	-	31	19	4.3	2.5	164	-	34	8.3	-	-	-	50	141	82	88	6				
	5-27-77	13.5	13	20	5	27	17	4.0	2.4	150	-	15	5.8	-	2.5	0.06	30	184	135	160	21				
															2.7	0.00	30	165	120	140	14				
	5-29-77	13.5	13	10	8	29	17	4.0	2.4	150	-	10	4.1	-	2.6	0.00	30	165	120	140	19				
30cda-2	6- 1-77	13.5	13	30	0	28	17	4.0	2.3	150	0	10	4.3	-	2.5	0.06	30	164 ^{2/}	120	140	17				
	9-28-76	12.0	13	-	-	24	16	3.8	2.2	136	-	6.6	4.9	-	2.7	0.06	30	150	112	130	14				
31dac-1	10- 4-77	11.5	13	30	4	60	29	6.8	2.8	310	0	9.0	7.9	-	-	-	50	282	250	270	15				
	9-28-76	14.5	8.7	-	-	47	18	7.1	2.4	227	-	6.9	8.1	-	0.15	0.03	30	217	186	190	5				
(C-43-4)30dba-1	10-19-76	13.0	8.8	-	-	69	8.3	12	2.1	166	-	70	7.7	-	-	-	50	266	136	210	70				
(C-43-4)31ddd-1	10-12-76	14.5	9.2	-	-	20	4.9	210	6.0	207	-	340	10	-	1.4	0.00	50	704	170	70	0				
32aad-1	10-14-76	16.0	9.2	-	-	16	6.6	190	7.4	199	-	290	22	-	0.17	0.15	220	704	170	70	0				
32cda-1	10- 5-76	14.5	8.7	-	-	71	24	240	11	167	-	630	28	-	0.49	0.12	240	643	163	67	0				
33abb-1	10- 4-76	13.0	26	-	-	110	20	25	4.6	0	-	470	15	-	0.06	0.03	240	1,100	137	280	160				
33cac-1	10- 4-76	15.0	13	-	-	350	88	110	13	0	-	1,500	54	-	0.14	0.06	120	675	0	360	360				
(C-43-5)2bbd-1	7-15-77	13.5	11	60	10	77	38	20	2.8	220	0	170	8.1	-	0.07	0.15	210	2,130	0	1,200	1,200				
25aaa-1	8-23-77	14.0	5.9	200	40	24	110	130	10	830	0	29	54	-	4.7	0.03	60	456	180	350	170				
25bda-1	9-22-77	14.5	15	30	630	120	120	94	8.3	460	0	470	69	-	-	-	340	773	680	510	0				
25cda-1	9- 2-77	15.0	15	90	480	110	99	120	8.6	470	0	420	83	-	-	-	230	1,120	380	790	420				
																	290	1,090	390	680	300				
25cdb-2	9-27-77	15.5	16	30	240	120	110	99	8.0	460	0	430	67	-	-	-	240	1,080	380	750	380				
34abd-1	2-23-77	17.5	13	-	-	14	3.6	350	5.3	320	-	450	76	-	-	-	330	1,070	262	50	0				
35aaa-1	5- 3-77	15.5	8.2	60	-	44	47	240	7.5	420	0	370	89	-	0.02	0.21	330	1,070	262	50	0				
36acd-1	10-27-76	12.0	16	-	-	160	290	400	12	571	-	1,700	280	-	0.11	0.12	560	1,020	344	300	0				
36cab-1	5- 4-77	14.5	15	20	-	130	120	130	8.1	490	-	580	89	-	0.09	0.09	1,500	1,150	468	1,600	1,100				
	9-21-77	15.0	16	70	460	120	120	110	7.6	350	0	580	89	-	0.05	0.15	300	1,320	402	820	420				
36ccc-1	8-25-77 ^{3/}	17.5	16	60	60	260	250	340	8.2	640	-	1,800	280	-	-	-	280	1,220	290	790	510				
	8-25-77 ^{3/}	15.5	14	80	60	450	150	2,500	29	490	0	5,100	1,000	-	-	-	940	3,470	530	1,700	1,200				
																	3,700	9,490	400	1,700	1,300				

Table 23.--Chemical analyses and temperature of water from selected wells, springs, and base-flow-measurement sites--Continued

Location	Date of collection	Temperature (°C)	Milligrams per liter, unless indicated otherwise																	Specific conductance (microhms per centimeter at 25°C)	pH	Sodium-sulfate ratio		
			Dissolved silica (SiO ₂)	Dissolved iron (Fe) (µg/L)	Dissolved manganese (Mn) (µg/L)	Dissolved calcium (Ca)	Dissolved magnesium (Mg)	Dissolved sodium (Na)	Dissolved potassium (K)	Bicarbonate (HCO ₃)	Carbonate (CO ₃)	Dissolved sulfate (SO ₄)	Dissolved chloride (Cl)	Dissolved fluoride (F)	Dissolved nitrate (NO ₃) + nitrite (NO ₂) as nitrogen (N)	Dissolved ortho-phosphate (PO ₄)	Dissolved boron (B) (µg/L)	Dissolved solids (sum of determined constituents)	Alkalinity as CaCO ₃				Hardness (Ca, Mg)	Noncarbonate hardness
UPPER KANAB CREEK BASIN - Continued																								
Wells - Continued																								
(C-43-6)9ccc-1	10-29-76	13.0	11	-	-	54	28	71	8.4	378	-	79	19	0.4	.04	.09	280	458	310	250	0	-	-	2.0
27dbd-1	10-20-76	15.5	14	-	-	260	81	430	10	340	-	1,500	40	1.0	.37	.06	1,800	2,510	279	980	700	3,900	-	6.0
(C-43-7)12bdb-1	6-14-77	-	13	20	0	53	15	5.9	.9	210	0	5.9	7.0	.2	-	-	40	204	170	190	22	340	6.5	.2
16bdd-1	6-17-77	13.0	12	70	0	52	13	3.9	2.9	210	0	5.8	4.0	.1	.20	.00	40	198	170	180	11	360	6.5	.1
16dba-1	6-17-77	13.0	9.2	60	10	55	14	2.9	2.9	210	0	8.2	3.2	.1	1.6	.03	30	206	170	200	23	360	6.5	.1
16dbb-1	5-11-77	13.0	9.4	-	-	49	14	2.4	2.6	210	-	5.6	2.6	.2	2.0	.09	20	198	170	180	8	345	-	.1
(C-43-8)34bbb-1	5- 1-77	14.0	13	-	-	29	11	2.8	3.5	130	-	6.5	4.0	.1	.97	.12	10	138	107	120	11	230	-	.1
(C-44-5)2aba-1	5- 2-77	14.5	16	50	-	53	57	85	2.0	320	0	240	31	.8	.72	.46	340	646	262	370	110	950	6.5	1.9
2bad-1	9-13-77	14.5	15	80	-	55	57	84	1.9	320	0	240	32	.8	.47	.49	330	648	260	370	110	950	6.5	1.9
2bad-2	9-18-77	14.5	11	20	60	54	15	19	2.3	180	0	150	25	.4	-	-	140	366	110	210	100	540	6.5	1.1
6cbb-1	9-30-76	17.0	13	-	-	170	67	260	11	371	-	59	20	.4	-	-	100	270	150	200	49	440	6.5	1.1
(C-44-6)5cda-1	6- 2-77	18.0	9.9	30	20	39	4.4	740	6.6	590	0	830	59	.4	36.0	.06	240	1,610	304	700	400	2,000	6.5	.6
5ddd-1	8-29-77	16.5	1.3	40	0	4.0	.8	320	3.8	670	-	40	75	1.5	.09	.00	900	2,110	480	120	0	2,800	6.5	30
Springs																								
(C-39-4)26ddd-S1	10-20-76	10.0	9.3	-	-	53	69	26	13	423	-	130	9.0	.5	.26	.03	220	520	347	420	69	775	-	.6
35dab-S1	10-20-76	12.0	9.2	-	-	100	130	80	21	515	-	510	18	.7	.06	.00	350	1,120	422	790	360	1,500	-	1.2
(C-39-5)32beb-S1	6-21-77	9.5	13	20	0	42	120	44	5.1	580	0	190	19	.4	.30	.06	160	721	480	600	120	1,100	6.5	.8
(C-40-5)6aad-S1	6-20-77	13.0	9.1	170	70	49	34	130	3.4	490	0	140	14	.6	.02	.00	150	622	400	260	0	925	6.5	3.5
8dda-S1	6-20-77	-	3.0	430	20	24	50	49	17	220	54	16	80	.4	.00	.03	240	402	270	270	0	650	10.0	1.3
9aad-S1	6-18-77	11.0	10	50	20	260	290	32	10	370	0	1,500	36	.6	.07	.06	80	2,320	300	1,800	1,500	2,600	6.5	.3
11bca-S1	6-20-77	-	12	120	60	88	95	6.0	12	440	0	260	14	.2	.01	.25	90	705	360	610	250	1,080	6.5	.1
(C-41-4)6adc-S1	10-20-76	11.0	11	-	-	110	92	52	7.0	371	-	420	12	.5	.84	.06	160	891	304	650	350	1,210	-	.9
6daa-S1	10-20-76	-	15	-	-	34	210	110	24	249	-	960	25	.5	.17	.00	330	1,500	204	950	750	1,700	-	1.6
(C-42-4)32dab-S1	10-21-76	14.0	11	-	-	38	22	7.9	2.3	186	-	20	6.6	.2	4.1	.09	50	218	153	190	33	410	-	.3
(C-42-5)22adb-S1	10-20-76	16.5	7.9	-	-	120	45	27	6.8	244	-	330	9.3	.3	.12	.00	110	667	200	490	280	725	-	.5
(C-42-6)17ddc-S1	10-29-76	-	15	-	-	26	16	4.4	2.0	144	-	6.3	3.8	.1	2.1	.09	40	154	118	130	13	-	-	.2
30ccb-S1	10- 1-76	11.5	8.2	-	-	51	12	3.9	1.3	199	-	5.8	4.9	.1	2.1	.03	30	195	163	180	14	340	-	.1
30dbb-S1	6- 2-77	12.5	10	20	60	54	16	5.0	2.5	180	-	6.1	5.5	.1	2.8	.00	30	200	150	200	53	320	-	.2
(C-42-7)25ccc-S1	10- 1-76	12.5	8.9	-	-	41	14	2.8	1.2	176	-	5.6	3.9	.1	2.4	.03	30	175	144	160	16	300	-	.1
(C-43-4)31aad-S1	10-19-76	16.5	8.3	-	-	21	5.2	3.1	1.8	60	-	18	2.7	.2	.80	.18	30	94	49	74	25	160	-	.2
(C-43-5)1ccd-S1	10-28-76	8.0	29	-	-	150	29	44	7.6	16	-	530	21	1.2	.13	.15	140	808	13	490	480	1,100	-	.9
2ddd-S1	10- 5-76	16.0	24	-	-	47	75	42	8.5	589	-	13	28	.4	.06	.03	200	534	483	430	0	800	-	.9
12bda-S1	10-12-76	13.0	11	-	-	39	19	13	2.5	200	-	250	21	.3	.43	.06	170	667	281	480	200	850	-	.8
(C-43-6)10ada-S1	10-29-76	-	15	-	-	61	20	7.8	2.9	284	-	16	11	.2	2.4	.03	60	221	164	180	12	370	-	.4
(C-43-7)3ccc-S1	6-14-77	12.0	10	20	0	36	11	1.7	1.1	160	0	5.6	1.7	.0	1.0	.03	60	266	233	230	2	-	-	.2
17acb-S1	5-11-77	11.5	9.4	-	-	22	8.3	1.3	1.7	100	-	6.0	1.3	.1	1.1	.03	10	104	82	89	7	190	-	.1
17acb-S2	5-11-77	10.5	8.4	-	-	15	5.7	.8	1.4	68	-	2.3	.7	.1	1.3	.03	10	74	56	61	5	130	-	.0
17bcc-S1	6-16-77	16.0	9.4	210	8	5.4	1.0	.7	.8	14	-	5.2	.5	.0	.21	.06	10	31	11	18	6	-	-	.1
20aca-S1	5-11-77	14.0	9.9	-	-	41	10	3.8	2.5	170	-	11	4.3	.1	.71	.03	30	170	140	140	4	280	-	.1
Base-flow-measurement sites																								
(C-42-6)20aaa	10-29-76	-	11	-	-	43	22	7.7	2.5	194	-	40	5.3	0.2	.84	.06	40	231	159	200	39	-	-	.2
30dbc	6- 2-77	18.0	18	330	170	80	27	9.0	2.2	360	0	5.9	6.6	.2	.62	.00	100	330	300	310	16	550	6.5	.2
(C-42-6)32abd	10-29-76	-	10	-	-	56	24	8.6	2.5	211	-	69	5.7	.3	.74	.03	40	283	173	240	66	-	-	.2
(C-44-5)11dde	10-13-76	16.0	14	-	-	140	180	300	12	519	-	1,100	150	.5	.15	.06	900	2,150	426	1,100	670	2,700	-	4.0
(C-40-4)6add	10-20-76	10.0	6.9	-	-	62	45	7.9	4.2	284	-	96	2.6	.3	.18	.00	50	366	233	340	110	580	-	.2
31bda	10-14-76	13.5	11	-	-	90	130	73	8.8	229	-	590	18	.4	.09	.12	110	1,030	188	760	570	1,400	-	1.2
(C-43-4)8bbb	10-27-76	12.0	17	-	-	61	49	27	4.1	433	-	22	26	.3	.38	.15	120	422	355	350	0	690	-	.6
18ccc	10-12-76	20.0	11	-	-	72	40	23	5.0	324	-	99	19	.3	.19	.00	120	430	266	340	79	720	-	.5
30ccc	10-12-76	18.0	14	-	-	92	95	90	11	584	-	250	54	.5	.14	.06	380	895	479	620	140	1,300	-	1.6
	10-13-76	12.0	13	-	-	100	130	210	11	557	-	680	110	.5	.08	.06	720	1,530	457	790	330	2,000	-	3.3

Table 23.--Chemical analyses and temperature of water from selected wells, springs, and base-flow-measurement sites--Continued

Location	Date of collection	Temperature (°C)	Milligrams per liter, unless indicated otherwise																		Specific conductance (microhos per centimeter at 25°C)	pH	Sodium-adsorption ratio	
			Dissolved silica (SiO ₂)	Dissolved iron (Fe) (ug/L)	Dissolved manganese (Mn) (ug/L)	Dissolved calcium (Ca)	Dissolved magnesium (Mg)	Dissolved sodium (Na)	Dissolved potassium (K)	Bicarbonate (HCO ₃)	Carbonate (CO ₃)	Dissolved sulfate (SO ₄)	Dissolved chloride (Cl)	Dissolved fluoride (F)	Dissolved nitrate (NO ₃) + nitrite (NO ₂) as nitrogen (N)	Dissolved orthophosphate (PO ₄)	Dissolved boron (B) (ug/L)	Dissolved solids (sum of determined constituents)	Alkalinity as CaCO ₃	Hardness (Ca, Mg)				Noncarbonate hardness
UPPER VIRGIN RIVER BASIN																								
Wells																								
(C-38-6)22dbc-1	9-29-77	11.0	9.4	20	10	61	36	3.0	1.8	340	0	5.4	3.6	0.5	-	-	50	288	280	300	22	500	6.5	0.1
(C-40-7)14bad-1	6-22-77	15.5	11	80	50	65	20	28	7.8	360	0	3.8	4.5	1.0	0.01	0.03	90	319	300	250	0	540	6.5	.8
(C-41-7)4ass-1	6-22-77	11.0	11	30	0	110	54	11	4.6	470	0	120	6.2	.5	.68	.00	60	552	390	500	110	860	6.5	.2
(C-41-9)10cdd-1	11-12-77	16.0	29	30	10	130	66	82	1.8	480	0	270	52	1.1	-	-	330	869	390	600	200	1,250	6.8	1.5
15ead-1	11-12-77	14.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1,700	6.8	-
15ddb-1	11-12-77	16.0	14	40	0	78	45	15	2.0	330	0	130	13	.5	-	-	140	460	270	380	110	700	6.8	.3
(C-41-10)28bca-1	12- 7-77	-	12	-	-	3.9	1.0	430	2.3	530	-	190	200	1.7	-	-	790	1,100	430	14	0	1,800	-	50
(C-42-10)7bdd-1	12-28-75 ^{7/}	-	12	0	75	26	13	114	6.0	369	0	20	20	.6	-	.06	170	394	303	120	0	625	6.8	4.6
(C-42-11)1dcb-1	12- 9-77	16.5	13	-	-	360	100	140	9.0	230	-	1,100	160	.3	-	-	220	2,000	190	1,300	1,100	2,400	-	1.7
19cca-1	6-20-78	18.5	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1,500	6.5	-
19ccc-2	11-18-77	17.5	22	20	240	200	73	39	2.9	220	0	600	38	.3	-	-	130	1,080	180	800	620	1,350	6.8	.6
(C-42-12)2dcd-1	11-17-77	15.0	18	1,900	350	120	36	17	1.6	330	0	180	21	.4	-	-	40	559	270	450	180	850	6.8	.4
18ccd-2	11-16-77	18.0	19	90	0	550	220	190	8.9	150	0	2,200	180	.5	-	-	450	3,440	120	2,300	2,200	3,500	6.8	1.7
23daa-1	6-20-78	17.0	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	-	1,060	6.5	-
Springs																								
(C-38-6)26ddd-S1	6-21-77	-	19	120	0	71	30	5.2	0.6	350	0	3.9	5.0	0.1	0.09	0.00	10	308	290	300	14	540	6.5	0.1
(C-40-7)14bad-S1	6-22-77 ^{8/}	13.0	9.5	40	8	28	10	10	3.2	160	0	6.2	2.2	.9	.08	.00	30	149	130	110	0	200	6.5	.4
(C-40-11)28acd-S1	6-20-74	8.0	28	-	-	30	-	12	4.0	-	0	10	9.0	.0	2.6	.06	0	226	-	140	-	335	7.1	-
(C-40-12)2adb-S1	12-10-77	12.5	18	-	-	110	43	49	3.2	310	0	180	63	.5	-	-	240	620	250	450	200	950	6.8	1.0
(C-41-13)25c-S1	8-31-60	37.5	28	-	-	590	148	2,490	177	583	-	2,050	3,610	2.1	3.2	-	5,000	9,390	-	-	-	13,500	7.4	24
(C-43-8)1aca-S1	5- 1-77	-	19	-	-	41	6.2	5.1	.5	140	-	13	4.3	.1	.54	.18	20	161	115	130	13	260	-	.2
Base-flow-measurement sites																								
(C-39-7)20ccc	6-22-77	18.0	7.4	60	0	43	32	1.6	0.4	270	0	6.6	0.8	0.1	0.01	0.00	10	225	220	240	18	400	6.5	0.0
(C-40-7)1bbe	10- 2-77	10.0	8.7	40	0	53	31	1.7	1.3	260	0	20	2.2	.4	-	-	10	247	210	260	47	430	6.5	.0
(C-40-8)36dac	10- 3-77	16.5	10	20	10	91	59	24	5.4	220	0	340	6.9	.3	-	-	50	645	180	470	290	900	6.5	.5

^{1/}Analysis by Nevada Power Co.

^{2/}Analysis includes, in micrograms per liter, aluminum (Al), 20; arsenic (As), 1; barium (Ba), 300; beryllium (Be), 0; cadmium (Cd), 1; chromium (Cr), 0; cobalt (Co), 0; copper (Cu), 1; lead (Pb), 28; lithium (Li), 2; mercury (Hg), 0.0; molybdenum (Mo), 0; nickel (Ni), 1; selenium (Se), 4; vanadium (V), 1.0; zinc (Zn), 10.

^{3/}Analysis includes, in micrograms per liter, aluminum (Al), 20; arsenic (As), 0; barium (Ba), 100; beryllium (Be), 5; cadmium (Cd), 1; chromium (Cr), 0; cobalt (Co), 0; copper (Cu), 2; lead (Pb), 7; lithium (Li), 4; mercury (Hg), 0.1; molybdenum (Mo), 1; nickel (Ni), 3; selenium (Se), 1; vanadium (V), 8.0; zinc (Zn), 10.

^{4/}Analysis includes, in micrograms per liter, aluminum (Al), 20; arsenic (As), 1; barium (Ba), 0; beryllium (Be), 0; cadmium (Cd), 15; chromium (Cr), 0; cobalt (Co), 2; copper (Cu), 1; lead (Pb), 10; lithium (Li), 0; mercury (Hg), 0.4; molybdenum (Mo), 0; nickel (Ni), 9; selenium (Se), 0; vanadium (V), 0.7; zinc (Zn), 10.

^{5/}Sampled at 40-foot depth in Shinarump Member of the Chinle Formation.

^{6/}Sampled at 325-foot depth in Moenkopi Formation.

^{7/}Analysis by Utah Department of Health.

^{8/}Analysis by U.S. National Park Service.

PUBLICATIONS OF THE UTAH DEPARTMENT OF NATURAL RESOURCES,
DIVISION OF WATER RIGHTS

(*)-Out of Print

TECHNICAL PUBLICATIONS

- *No. 1. Underground leakage from artesian wells in the Flowell area, near Fillmore, Utah, by Penn Livingston and G. B. Maxey, U.S. Geological Survey, 1944.
- No. 2. The Ogden Valley artesian reservoir, Weber County, Utah, by H. E. Thomas, U.S. Geological Survey, 1945.
- *No. 3. Ground water in Pavant Valley, Millard County, Utah, by P. E. Dennis, G. B. Maxey and H. E. Thomas, U.S. Geological Survey, 1946.
- *No. 4. Ground water in Tooele Valley, Tooele County, Utah, by H. E. Thomas, U.S. Geological Survey, in Utah State Eng. 25th Bienn. Rept., p. 91-238, pls. 1-6, 1946.
- *No. 5. Ground water in the East Shore area, Utah: Part I, Bountiful District, Davis County, Utah, by H. E. Thomas and W. B. Nelson, U.S. Geological Survey, in Utah State Eng. 26th Bienn. Rept., p. 53-206, pls. 1-2, 1948.
- *No. 6. Ground water in the Escalante Valley, Beaver, Iron, and Washington Counties, Utah, by P. F. Fix, W. B. Nelson, B. E. Lofgren, and R. G. Butler, U.S. Geological Survey, in Utah State Eng. 27th Bienn. Rept., p. 107-210, pls. 1-10, 1950.
- No. 7. Status of development of selected ground-water basins in Utah, by H. E. Thomas, W. B. Nelson, B. E. Lofgren, and R. G. Butler, U.S. Geological Survey, 1952.
- *No. 8. Consumptive use of water and irrigation requirements of crops in Utah, by C. O. Roskelly and W. D. Criddle, 1952.
- No. 8. (Revised) Consumptive use and water requirements for Utah, by W. D. Criddle, Karl Harris, and L. S. Willardson, 1962.
- No. 9. Progress report on selected ground water basins in Utah, by H. A. Waite, W. B. Nelson, and others, U.S. Geological Survey, 1954.
- *No. 10. A compilation of chemical quality data for ground and surface waters in Utah, by J. G. Connor, C. G. Mitchell, and others, U.S. Geological Survey, 1958.
- *No. 11. Ground water in northern Utah Valley, Utah: A progress report for the period 1948-63, by R. M. Cordova and Seymour Subitzky, U.S. Geological Survey, 1965.

- *No. 12. Reevaluation of the ground-water resources of Tooele Valley, Utah, by J. S. Gates, U.S. Geological Survey, 1965.
- *No. 13. Ground-water resources of selected basins in southwestern Utah, by G. W. Sandberg, U.S. Geological Survey, 1966.
- *No. 14. Water-resources appraisal of the Snake Valley area, Utah and Nevada, by J. W. Hood and F. E. Rush, U.S. Geological Survey, 1966.
- *No. 15. Water from bedrock in the Colorado Plateau of Utah, by R. D. Feltis, U.S. Geological Survey, 1966.
- *No. 16. Ground-water conditions in Cedar Valley, Utah County, Utah, by R. D. Feltis, U.S. Geological Survey, 1967.
- *No. 17. Ground-water resources of northern Juab Valley, Utah, by L. J. Bjorklund, U.S. Geological Survey, 1968.
- No. 18. Hydrologic reconnaissance of Skull Valley, Tooele County, Utah, by J. W. Hood and K. M. Waddell, U.S. Geological Survey, 1968.
- No. 19. An appraisal of the quality of surface water in the Sevier Lake basin, Utah, by D. C. Hahl and J. C. Mundorff, U.S. Geological Survey, 1968.
- No. 20. Extensions of streamflow records in Utah, by J. K. Reid, L. E. Carroon, and G. E. Pyper, U.S. Geological Survey, 1969.
- No. 21. Summary of maximum discharges in Utah streams, by G. L. Whitaker, U.S. Geological Survey, 1969.
- No. 22. Reconnaissance of the ground-water resources of the upper Fremont River valley, Wayne County, Utah, by L. J. Bjorklund, U.S. Geological Survey, 1969.
- No. 23. Hydrologic reconnaissance of Rush Valley, Tooele County, Utah, by J. W. Hood, Don Price, and K. M. Waddell, U.S. Geological Survey, 1969.
- No. 24. Hydrologic reconnaissance of Deep Creek valley, Tooele and Juab Counties, Utah, and Elko and White Pine Counties, Nevada, by J. W. Hood and K. M. Waddell, U.S. Geological Survey, 1969.
- No. 25. Hydrologic reconnaissance of Curlew Valley, Utah and Idaho, by E. L. Bolke and Don Price, U.S. Geological Survey, 1969.
- No. 26. Hydrologic reconnaissance of the Sink Valley area, Tooele and Box Elder Counties, Utah, by Don Price and E. L. Bolke, U.S. Geological Survey, 1969.
- No. 27. Water resources of the Heber-Kamas-Park City area, north-central Utah, by C. H. Baker, Jr., U.S. Geological Survey, 1970.

- No. 28. Ground-water conditions in southern Utah Valley and Goshen Valley, Utah, by R. M. Cordova, U.S. Geological Survey, 1970.
- No. 29. Hydrologic reconnaissance of Grouse Creek valley, Box Elder County, Utah, by J. W. Hood and Don Price, U.S. Geological Survey, 1970.
- No. 30. Hydrologic reconnaissance of the Park Valley area, Box Elder County, Utah, by J. W. Hood, U.S. Geological Survey, 1971.
- No. 31. Water resources of Salt Lake County, Utah, by A. G. Hely, R. W. Mower, and C. A. Harr, U.S. Geological Survey, 1971.
- No. 32. Geology and water resources of the Spanish Valley area, Grand and San Juan Counties, Utah, by C. T. Sumsion, U.S. Geological Survey, 1971.
- No. 33. Hydrologic reconnaissance of Hansel Valley and northern Rozel Flat, Box Elder County, Utah, by J. W. Hood, U.S. Geological Survey, 1971.
- No. 34. Summary of water resources of Salt Lake County, Utah, by A. G. Hely, R. W. Mower, and C. A. Harr, U.S. Geological Survey, 1971.
- No. 35. Ground-water conditions in the East Shore area, Box Elder, Davis, and Weber Counties, Utah, 1960-69, by E. L. Bolke and K. M. Waddell, U.S. Geological Survey, 1972.
- No. 36. Ground-water resources of Cache Valley, Utah and Idaho, by L. J. Bjorklund and L. J. McGreevy, U.S. Geological Survey, 1971.
- No. 37. Hydrologic reconnaissance of the Blue Creek Valley area, Box Elder County, Utah, by E. L. Bolke and Don Price, U.S. Geological Survey, 1972.
- No. 38. Hydrologic reconnaissance of the Promontory Mountains area, Box Elder County, Utah, by J. W. Hood, U.S. Geological Survey, 1972.
- No. 39. Reconnaissance of chemical quality of surface water and fluvial sediment in the Price River Basin, Utah, by J. C. Mundorff, U.S. Geological Survey, 1972.
- No. 40. Ground-water conditions in the central Virgin River basin, Utah, by R. M. Cordova, G. W. Sandberg, and Wilson McConkie, U.S. Geological Survey, 1972.
- No. 41. Hydrologic reconnaissance of Pilot Valley, Utah and Nevada, by J. C. Stephens and J. W. Hood, U.S. Geological Survey, 1973.
- No. 42. Hydrologic reconnaissance of the northern Great Salt Lake Desert and summary hydrologic reconnaissance of northwestern Utah, by J. C. Stephens, U.S. Geological Survey, 1973.

- No. 43. Water resources of the Milford area, Utah, with emphasis on ground water, by R. W. Mower and R. M. Cordova, U.S. Geological Survey, 1974.
- No. 44. Ground-water resources of the lower Bear River drainage basin, Box Elder County, Utah, by L. J. Bjorklund and L. J. McGreevy, U.S. Geological Survey, 1974.
- No. 45. Water resources of the Curlew Valley drainage basin, Utah and Idaho, by C. H. Baker, Jr., U.S. Geological Survey, 1974.
- No. 46. Water-quality reconnaissance of surface inflow to Utah Lake, by J. C. Mundorff, U.S. Geological Survey, 1974.
- No. 47. Hydrologic reconnaissance of the Wah Wah Valley drainage basin, Millard and Beaver Counties, Utah, by J. C. Stephens, U.S. Geological Survey, 1974.
- No. 48. Estimating mean streamflow in the Duchesne River basin, Utah, by R. W. Cruff, U.S. Geological Survey, 1974.
- No. 49. Hydrologic reconnaissance of the southern Uinta Basin, Utah and Colorado, by Don Price and L. L. Miller, U.S. Geological Survey, 1975.
- No. 50. Seepage study of the Rocky Point Canal and the Grey Mountain-Pleasant Valley Canal systems, Duchesne County, Utah, by R. W. Cruff and J. W. Hood, U.S. Geological Survey, 1976.
- No. 51. Hydrologic reconnaissance of the Pine Valley drainage basin, Millard, Beaver, and Iron Counties, Utah, by J. C. Stephens, U.S. Geological Survey, 1976.
- No. 52. Seepage study of canals in Beaver Valley, Beaver County, Utah, by R. W. Cruff and R. W. Mower, U.S. Geological Survey, 1976.
- No. 53. Characteristics of aquifers in the northern Uinta Basin area, Utah and Colorado, by J. W. Hood, U.S. Geological Survey, 1976.
- No. 54. Hydrologic evaluation of Ashley Valley, northern Uinta Basin area, Utah, by J. W. Hood, U.S. Geological Survey, 1977.
- No. 55. Reconnaissance of water quality in the Duchesne River basin and some adjacent drainage areas, Utah, by J. C. Mundorff, U.S. Geological Survey, 1977.
- No. 56. Hydrologic reconnaissance of the Tule Valley drainage basin, Juab and Millard Counties, Utah, by J. C. Stephens, U.S. Geological Survey, 1977.
- No. 57. Hydrologic evaluation of the upper Duchesne River valley, northern Uinta Basin area, Utah, by J. W. Hood, U.S. Geological Survey, 1977.

- No. 58. Seepage study of the Sevier Valley-Piute Canal, Sevier County, Utah, by R. W. Cruft, U.S. Geological Survey, 1977.
- No. 59. Hydrologic reconnaissance of the Dugway Valley-Government Creek area, west-central Utah, by J. C. Stephens and C. T. Sumsion, U.S. Geological Survey, 1978.
- No. 60. Ground-water resources of the Parowan-Cedar City drainage basin, Iron County, Utah, by L. J. Bjorklund, C. T. Sumsion, and G. W. Sandberg, U.S. Geological Survey, 1978.
- No. 61. Ground-water conditions in the Navajo Sandstone in the central Virgin River basin, Utah, by R. M. Cordova, U.S. Geological Survey, 1978.
- No. 62. Water resources of the northern Uinta Basin area, Utah and Colorado, with special emphasis on ground-water supply, by J. W. Hood and F. K. Fields, U.S. Geological Survey, 1978.
- No. 63. Hydrology of the Beaver Valley area, Beaver County, Utah with emphasis on ground water, by R. W. Mower, U.S. Geological Survey, 1978.
- No. 64. Hydrologic reconnaissance of the Fish Springs Flat area, Tooele, Juab, and Millard Counties, Utah, by E. L. Bolke and C. T. Sumsion, U.S. Geological Survey, 1978.
- No. 65. Reconnaissance of chemical quality of surface water and fluvial sediment in the Dirty Devil River basin, Utah, by J. C. Mundorff, 1978.
- No. 66. Aquifer tests of the Navajo Sandstone near Caineville, Wayne County, Utah, by J. W. Hood and T. W. Danielson, U.S. Geological Survey, 1979.
- No. 67. Seepage study of the West Side and West Canals, Box Elder County, by R. W. Cruft, U.S. Geological Survey, 1980.
- No. 68. Bedrock aquifers in the lower Dirty Devil River basin, Utah, with emphasis on the Navajo Sandstone, by J. W. Hood and T. W. Danielson, U.S. Geological Survey, 1981.
- No. 69. Ground-water conditions in Tooele Valley, 1976-78, by A. C. Razem and J. I. Steiger, U.S. Geological Survey, 1981.

WATER CIRCULARS

- No. 1. Ground water in the Jordan Valley, Salt Lake County, Utah, by Ted Arnow, U.S. Geological Survey, 1965.
- No. 2. Ground water in Tooele Valley, Utah, by J. S. Gates and O. A. Keller, U.S. Geological Survey, 1970.

BASIC-DATA REPORTS

- *No. 1. Records and water-level measurements of selected wells and chemical analyses of ground water, East Shore area, Davis, Weber, and Box Elder Counties, Utah, by R. E. Smith, U.S. Geological Survey, 1961.
- No. 2. Records of selected wells and springs, selected drillers' logs of wells, and chemical analyses of ground and surface waters, northern Utah Valley, Utah County, Utah, by Seymour Subitzky, U.S. Geological Survey, 1962.
- No. 3. Ground-water data, central Sevier Valley, parts of Sanpete, Sevier, and Piute Counties, Utah, by C. H. Carpenter and R. A. Young, U.S. Geological Survey, 1963.
- *No. 4. Selected hydrologic data, Jordan Valley, Salt Lake County, Utah, by I. W. Marine and Don Price, U.S. Geological Survey, 1963.
- *No. 5. Selected hydrologic data, Pavant Valley, Millard County, Utah, by R. W. Mower, U.S. Geological Survey, 1963.
- *No. 6. Ground-water data, parts of Washington, Iron, Beaver, and Millard Counties, Utah, by G. W. Sandberg, U.S. Geological Survey, 1963.
- No. 7. Selected hydrologic data, Tooele Valley, Tooele County, Utah, by J. S. Gates, U.S. Geological Survey, 1963.
- No. 8. Selected hydrologic data, upper Sevier River basin, Utah, by C. H. Carpenter, G. B. Robinson, Jr., and L. J. Bjorklund, U.S. Geological Survey, 1964.
- *No. 9. Ground-water data, Sevier Desert, Utah, by R. W. Mower and R. D. Feltis, U.S. Geological Survey, 1964.
- No. 10. Quality of surface water in the Sevier Lake basin, Utah, by D. C. Hahl and R. E. Cabell, U.S. Geological Survey, 1965.
- *No. 11. Hydrologic and climatologic data, collected through 1964, Salt Lake County, Utah, by W. V. Iorns, R. W. Mower, and C. A. Horr, U.S. Geological Survey, 1966.
- No. 12. Hydrologic and climatologic data, 1965, Salt Lake County, Utah, by W. V. Iorns, R. W. Mower, and C. A. Horr, U.S. Geological Survey, 1966.
- No. 13. Hydrologic and climatologic data, 1966, Salt Lake County, Utah, by A. G. Hely, R. W. Mower, and C. A. Horr, U.S. Geological Survey, 1967.
- No. 14. Selected hydrologic data, San Pitch River drainage basin, Utah, by G. B. Robinson, Jr., U.S. Geological Survey, 1968.

- No. 15. Hydrologic and climatologic data, 1967, Salt Lake County, Utah, by A. G. Hely, R. W. Mower, and C. A. Horr, U.S. Geological Survey, 1968.
- No. 16. Selected hydrologic data, southern Utah and Goshen Valleys, Utah, by R. M. Cordova, U.S. Geological Survey, 1969.
- No. 17. Hydrologic and climatologic data, 1968, Salt Lake County, Utah, by A. G. Hely, R. W. Mower, and C. A. Horr, U.S. Geological Survey, 1969.
- No. 18. Quality of surface water in the Bear River basin, Utah, Wyoming, and Idaho, by K. M. Waddell, U.S. Geological Survey, 1970.
- No. 19. Daily water-temperature records for Utah streams, 1944-68, by G. L. Whitaker, U.S. Geological Survey, 1970.
- No. 20. Water-quality data for the Flaming Gorge area, Utah and Wyoming, by R. J. Madison, U.S. Geological Survey, 1970.
- No. 21. Selected hydrologic data, Cache Valley, Utah and Idaho, by L. J. McGreevy and L. J. Bjorklund, U.S. Geological Survey, 1970.
- No. 22. Periodic water- and air-temperature records for Utah streams, 1966-70, by G. L. Whitaker, U.S. Geological Survey, 1971.
- No. 23. Selected hydrologic data, lower Bear River drainage basin, Box Elder County, Utah, by L. J. Bjorklund and L. J. McGreevy, U.S. Geological Survey, 1973.
- No. 24. Water-quality data for the Flaming Gorge Reservoir area, Utah and Wyoming, 1969-72, by E. L. Bolke and K. M. Waddell, U.S. Geological Survey, 1972.
- No. 25. Streamflow characteristics in northeastern Utah and adjacent areas, by F. K. Fields, U.S. Geological Survey, 1975.
- No. 26. Selected hydrologic data, Uinta Basin area, Utah and Colorado, by J. W. Hood, J. C. Mundorff, and Don Price, U.S. Geological Survey, 1976.
- No. 27. Chemical and physical data for the Flaming Gorge Reservoir area, Utah and Wyoming, by E. L. Bolke, U.S. Geological Survey, 1976.
- No. 28. Selected hydrologic data, Parowan Valley and Cedar City Valley, drainage basins, Iron County, Utah, by L. J. Bjorklund, L. J. McGreevy, and G. W. Sandberg, U.S. Geological Survey, 1977.
- No. 29. Climatologic and hydrologic data, southeastern Uinta Basin, Utah and Colorado, water years 1975 and 1976, by L. S. Conroy and F. K. Fields, U.S. Geological Survey, 1977.

- No. 30. Selected ground-water data, Bonneville Salt Flats and Pilot Valley, western Utah, by G. C. Lines, U.S. Geological Survey, 1977.
- No. 31. Selected hydrologic data, Wasatch Plateau-Book Cliffs coal-fields area, Utah, by K. M. Waddell and others, U.S. Geological Survey, 1978.
- No. 32. Selected coal-related ground-water data, Wasatch Plateau-Book Cliffs area, Utah, by C. T. Sumsion, U.S. Geological Survey, 1979.
- No. 33. Hydrologic and climatologic data, southeastern Uinta Basin, Utah and Colorado, water year 1977, by L. S. Conroy, U.S. Geological Survey, 1979.
- No. 34. Hydrologic and climatologic data, southeastern Uinta Basin, Utah and Colorado, water year 1978, by L. S. Conroy, U.S. Geological Survey, 1980.

INFORMATION BULLETINS

- *No. 1. Plan of work for the Sevier River Basin (Sec. 6, P. L. 566), U.S. Department of Agriculture, 1960.
- *No. 2. Water production from oil wells in Utah, by Jerry Tuttle, Utah State Engineer's Office, 1960.
- *No. 3. Ground-water areas and well logs, central Sevier Valley, Utah, by R. A. Young, U.S. Geological Survey, 1960.
- *No. 4. Ground-water investigations in Utah in 1960 and reports published by the U.S. Geological Survey or the Utah State Engineer prior to 1960, by H. D. Goode, U.S. Geological Survey, 1960.
- *No. 5. Developing ground water in the central Sevier Valley, Utah, by R. A. Young and C. H. Carpenter, U.S. Geological Survey, 1961.
- *No. 6. Work outline and report outline for Sevier River basin survey, (Sec. 6, P. L. 566), U.S. Department of Agriculture, 1961.
- *No. 7. Relation of the deep and shallow artesian aquifers near Lynndyl, Utah, by R. W. Mower, U.S. Geological Survey, 1961.
- *No. 8. Projected 1975 municipal water-use requirements, Davis County, Utah, by Utah State Engineer's Office, 1962.
- No. 9. Projected 1975 municipal water-use requirements, Weber County, Utah, by Utah State Engineer's Office, 1962.
- *No. 10. Effects on the shallow artesian aquifer of withdrawing water from the deep artesian aquifer near Sugarville, Millard County, Utah, by R. W. Mower, U.S. Geological Survey, 1963.

- *No. 11. Amendments to plan of work and work outline for the Sevier River basin (Sec. 6, P. L. 566), U.S. Department of Agriculture, 1964.
- *No. 12. Test drilling in the upper Sevier River drainage basin, Garfield and Piute Counties, Utah, by R. D. Feltis and G. B. Robinson, Jr., U.S. Geological Survey, 1963.
- *No. 13. Water requirements of lower Jordan River, Utah, by Karl Harris, Irrigation Engineer, Agricultural Research Service, Phoenix, Arizona, prepared under informal cooperation approved by Mr. W. W. Donnan, Chief, Southwest Branch (Riverside, California) Soil and Water Conservation Research Division, Agricultural Research Service, U.S.D.A., and by W. D. Criddle, State Engineer, State of Utah, Salt Lake City, Utah, 1964.
- *No. 14. Consumptive use of water by native vegetation and irrigated crops in the Virgin River area of Utah, by W. D. Criddle, J. M. Bagley, R. K. Higginson, and D. W. Hendricks, through cooperation of Utah Agricultural Experiment Station, Agricultural Research Service, Soil and Water Conservation Branch, Western Soil and Water Management Section, Utah Water and Power Board, and Utah State Engineer, Salt Lake City, Utah, 1964.
- *No. 15. Ground-water conditions and related water-administration problems in Cedar City Valley, Iron County, Utah, February, 1966, by J. A. Barnett and F. T. Mayo, Utah State Engineer's Office.
- *No. 16. Summary of water well drilling activities in Utah, 1960 through 1965, compiled by Utah State Engineer's Office, 1966.
- *No. 17. Bibliography of U.S. Geological Survey water-resources reports for Utah, compiled by O. A. Keller, U.S. Geological Survey, 1966.
- *No. 18. The effect of pumping large-discharge wells on the ground-water reservoir in southern Utah Valley, Utah County, Utah, by R. M. Cordova and R. W. Mower, U.S. Geological Survey, 1967.
- No. 19. Ground-water hydrology of southern Cache Valley, Utah, by L. P. Beer, Utah State Engineer's Office, 1967.
- *No. 20. Fluvial sediment in Utah, 1905-65, A data compilation by J. C. Mundorff, U.S. Geological Survey, 1968.
- *No. 21. Hydrogeology of the eastern portion of the south slopes of the Uinta Mountains, Utah, by L. G. Moore and D. A. Barker, U.S. Bureau of Reclamation, and J. D. Maxwell and B. L. Bridges, Soil Conservation Service, 1971.
- *No. 22. Bibliography of U.S. Geological Survey water-resources reports for Utah, compiled by B. A. LaPray, U.S. Geological Survey, 1972.
- *No. 23. Bibliography of U.S. Geological Survey water-resources reports for Utah, compiled by B. A. LaPray, U.S. Geological Survey, 1975.

- No. 24. A water-land use management model for the Sevier River basin, Phase I and II, by V. A. Narasimham and Eugene K. Israelsen, Utah Water Research Laboratory, College of Engineering, Utah State University, 1975.
- No. 25. A water-land use management model for the Sevier River basin, Phase III, by Eugene K. Israelsen, Utah Water Research Laboratory, College of Engineering, Utah State University, 1976.
- No. 26. Test drilling for fresh water in Tooele Valley, Utah, by K. H. Ryan, B. W. Nance, and A. C. Razem, Utah Department of Natural Resources, 1981.
- No. 27. Bibliography of U.S. Geological Survey Water-Resources Reports for Utah, compiled by Barbara A. LaPray and Linda S. Hamblin, U.S. Geological Survey, 1980.